

SURFACE MOUNT LIGHTING


Catalog Number: _____
 Type: _____
 Job: _____ Date: _____

LX600/650


APPLICATIONS:

The Luxnet LX600/650 series is ideal for parking areas, entrances, walkways, underpasses, loading docks and recreation areas.

DIMENSIONS:

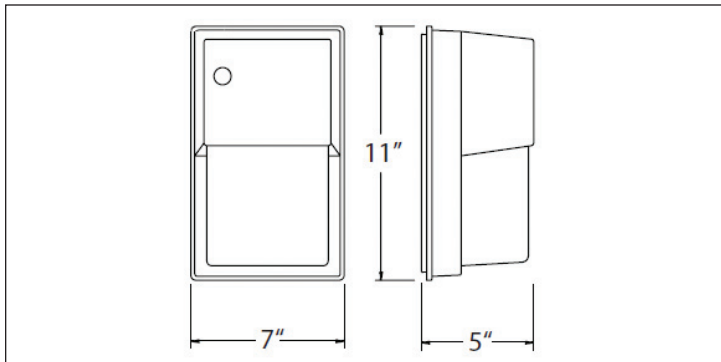

PHOTOMETRICS:

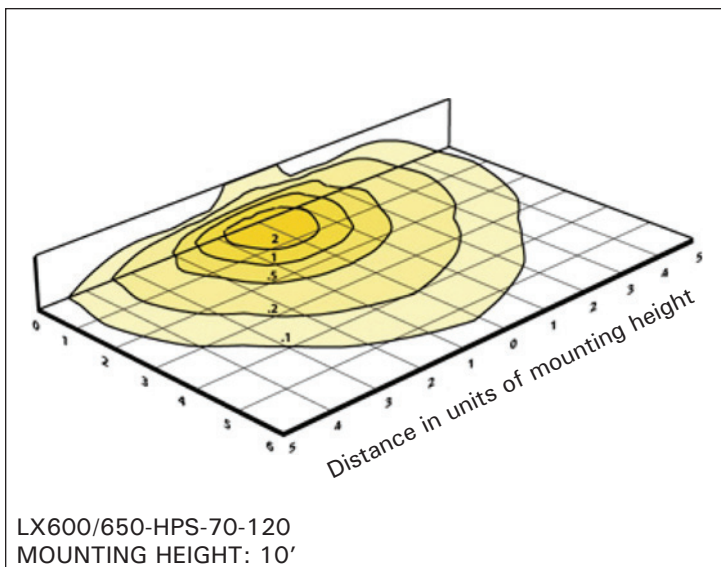

SPECIFICATIONS:

- High impact polycarbonate lens and housing
- Aluminum base plate with conduit access
- One piece aluminum reflector
- Silicone gasket for housing integrity
- 1/2" tapped holes for photocell (photocell optional)
- HP and MH available, 100W max
- Bronze powder coat finish
- Lamp included

LISTINGS:

- UL listed for WET LOCATION for ceiling and wall mounting.

ORDERING CHART

✓	Catalog Number	Wattage	Voltage	Weight	
				lbs	kgs
PULSE START METAL HALIDE					
	LX650-MH100MBZPS	100W	Quad-Tap®	5.0	2.3
HIGH PRESSURE SODIUM					
	LX600-HP50BZPS	50W	120	5.0	2.3
	LX600-HP70BZPS	70W	120	5.0	2.3
	LX650-HP100BZPS	100W	120	5.0	2.3

BZ = STANDARD BRONZE POWDER COAT FINISH

