

PACO REMOTE (PR)



Remotes

Job/Location: _____	Job Type: _____
Contractor: _____	Date: _____
Prepared By: _____	



PR-1



PR-2



PR-WP

■ paco - high output led remote heads

The **PACO PR**, fully adjustable remote heads deliver high output from 12 LEDs per lamp head. For use as part of an emergency lighting system to provide light for path of egress. Weather-proof version is sealed for use in damp and wet location areas.

PR-1 & -2 compatible with Beghelli Paco PX exit, Paco PCH combo, Paco PEH-1 unit, and Paco PEH-T20 unit only.


PR-1/2-WP compatible with Beghelli Paco PX exit, Paco PCH combo, Paco PEH-1 unit, Paco Aqua exit, and Paco Aqua combo only.

■ electrical

Powered from low voltage power source (3.6V batteries). Low voltage wiring not provided. Max wattage: PR-1 0.6W, PR-2 1.22W, PR-1-WP 1.17W and PR-2-WP: 2.34W

The operating temperature is from 68°F up to 86°F. (20°C to 30°C).

■ dimensions (in,mm.)

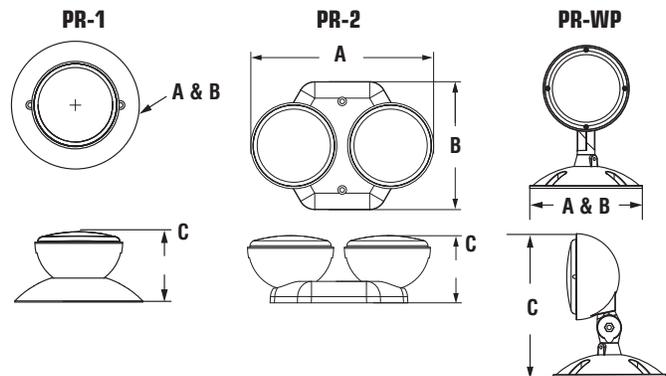

Series	A	B	C
PR-1	4.6" 116mm	4.6" 116mm	2.5" 63mm
PR-2	6.7" 179mm	4.7" 119mm	2.5" 63mm
PR-WP	4.5" 119mm	4.5" 119mm	5.8" 148mm

■ ordering logic

Example: PR-1-WP

Series	Head #	Option
PR	1 (single head)	WP (weatherproof)
	2 (double head)	