

Job: _____
Model: _____

Type: _____
Date: _____

Welded grid hooks securely hold the RTB in place

Trim held firmly in place with two (2) high tension spring clips which eliminates any screws and maintains the clean appearance



■ **Installation:** Specifically designed for installation into a T-bar type grid ceiling for a clean and architecturally pleasing appearance

■ **Housing:** Constructed from durable 20 gauge steel in white powder coat standard

■ **Lamps:** PAR36 (LR) style heads, PAR18 (SR) style heads and MR16 (BTMR) are offered; Multiple lamp options are available


■ internal

The RTB is configured with universal 120/277VAC input with solid state charging circuitry. Standard features include low voltage disconnect, AC lockout and brownout protection.

■ external

The RTB housing is constructed with durable 20 gauge steel. Stamped conduit knockouts are provided on the sides of all RTB units. Remote lamp loads are connected to the emergency power supply with sturdy terminal connectors. These connectors allow for a large gauge of wire to be used, increasing the flexibility of installation. The RTB is finished in a durable white powder coat standard. PAR36 (LR) style heads, PAR18 (SR) style heads and MR16 (BTMR) are also offered. External test switch and monitor LED are standard.

■ dimensions (in,mm)

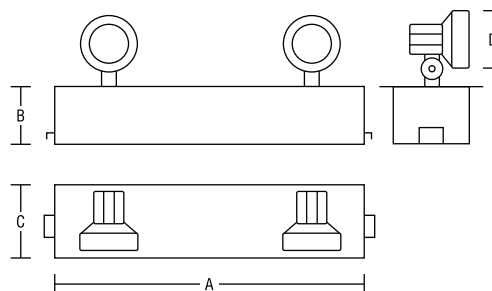

Cabinet	A	B	C
A	23.75" 603mm	8.12" 206mm	4.75" 121mm

NOTE: Dimension D (see drawing) will vary based on heads supplied.

■ ordering information

EXAMPLE: RTB 660 2LR9W AT

Series	Operation	Pb-A (Capacity)	Ni-Cd ¹ (Capacity)	Emergency Heads	Lamps ⁵	Options
RTB	6	18 (6V)	22 (6V)	0 (no heads)	See lamp	ACTB (terminal block AC)
	12	27 (6, 12V)	42 (6V, 12V)	2BTMR (double, MR16)	selection	AM (ammeter)
		36 (6, 12V)	90 (6V, 12V)	1BTMR (single, MR16)	on next page	AT (autotest)
		60 (6V, 12V)		2LR (double PAR36)		B (black finish)
		72 (6V, 12V)		1LR (single PAR36)		BZ (audible alarm - buzzer)
				2SR (double PAR18)		CC (custom color - specify)
				1SR (single PAR18)		DCTB (terminal block DC)
						FAI ² (fire alarm interface)
						IRT ³ (infrared testing)
						NC ¹ (nickel-cadmium battery)
						TC (teflon coated lens)
						TD ⁴ (time delay - 5, 10, 15 min.)
						TP (tamper proof screws)
						VM (voltmeter)

NOTE 1: For nickel-cadmium battery, select NC option and capacity from Ni-Cd column

NOTE 2: Specify type of fire alarm signal: normally open, normally closed or 6, 12, 24VDC (specify input voltage used)

NOTE 3: Available for capacities up to 36W (6V or 12V). HHC (controller for IRT) ordered separately (item# 476000021)

NOTE 4: Specify AC input voltage and time delay (10 min standard)

NOTE 5: ENSURE BATTERY CAPACITY IS EQUAL TO OR HIGHER THAN TOTAL LAMP WATTAGE

■ emergency heads

The RTB is supplied with PAR36 (LR) style heads. PAR18 (SR) style heads or MR16 (BTMR) style heads. The LR and SR head types feature a unique twist locking collar that securely holds the lens and facilitates quick and easy re-lamping.

■ electrical

BATTERY: The RTB is designed with a maintenance free, sealed valve regulated lead acid battery that provides a minimum emergency duration of 90 minutes. Optional nickel cadmium batteries are available. Recharge time of the battery is twenty-four [24] hours. The maximum working temperature is 45° C. The minimum working temperature is 10°C. Nickel cadmium batteries are available as an option.

CIRCUIT: The RTB utilizes a high-efficiency two stage charger providing a fully automatic constant charging current with low voltage disconnect protection. All components used in the circuitry are temperature compensated. The charger also has brownout and short circuit protection. Charger status is easily determined via a dual diagnostic LED display which indicates AC/ON and High Charge. An external test switch allows maintenance personnel to quickly determine the operational status of the unit.

■ mechanical

Torsion springs firmly hold the RTB cover in place allowing for easy installation and maintenance. Remote lamp loads are connected to the emergency power supply with sturdy terminal connectors. These connectors allow for a large gauge of wire to be used, increasing the flexibility of installation.

■ autotest

The Beghelli Autotest system performs one 5 minute discharge test monthly. Every 6 months two 90 minute discharge tests are performed. This tests both full battery capacity and recharge capability, as required by the fire code. The information is communicated simply and intuitively to maintenance personnel via a single multi-color LED. The Beghelli Autotest system also includes 0, 5, 10 or 20 minute time Autotest delay function to allow HID lighting to restrike.

- Red: Battery or Circuit Malfunction
- Yellow: Lamp Malfunctioning
- Green: Normal Operation

■ lamp selection

	6V	12V
Incandescent ¹	7.2, 9W	9, 12, 18W
Halogen (Q) ²	12W	12, 20W
MR16 LED ³	5, 7W	2, 5, 7W

NOTE 1: Available in LR lamp heads (ex: 2LR9W) and SR lamp heads (ex: 2SR18W)

NOTE 2: Available in LR lamp heads (ex: 2LR12Q) and SR lamp heads (2SR20Q)

NOTE 3: Available in SR lamp heads (ex: 2SR7WLED) and BTMR lamp heads (ex: 2BTMR2WLED)

■ model rating guide

Model	Voltage	Wattage			
		90min	120min	180min	240min
RTB 618	6	18	14	9	7
RTB 622NC	6	22	16	11	8
RTB 627	6	27	20	14	10
RTB 636	6	36	27	18	13
RTB 642NC	6	42	32	21	16
RTB 660	6	60	45	30	23
RTB 672	6	72	54	36	27
RTB 690NC	6	90	68	45	34
RTB 1227	12	27	20	14	10
RTB 1236	12	36	27	18	13
RTB 1242NC	12	42	32	21	16
RTB 1260	12	60	45	30	23
RTB 1272	12	72	54	36	27
RTB 1290NC	12	90	68	45	34

NOTE: Cabinet size may change based on configurations.

* ENSURE MAX WATTS IS > TOTAL LAMP WATTAGE

■ warranty

The RTB comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.