

## INSTALLATION INSTRUCTIONS

**IMPORTANT SAFEGUARDS**

## Read &amp; Follow All Safety Instructions

When using electrical equipment, basic safety precautions should always be followed including:

1. Disconnect power before performing work on electrical equipment (using the light switch to turn off the power is not sufficient to prevent electrical shock)
2. Do not use outdoors
3. Do not mount near gas or electric heaters
4. Do not install in unstable, loose or breakable surfaces and do not let objects impact or exert force on the surface of the fixture
5. Use caution when servicing batteries (Battery acid can cause burns to skin and eyes; If acid is spilled on skin or eyes, flush with water and contact a physician immediately)
6. Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel
7. The use of accessory equipment not recommended by Beghelli Inc may cause an unsafe condition and will void the unit's warranty
8. Do not use this equipment for other than its intended purpose
9. Installation and servicing of this equipment should be performed by a qualified electrician familiar with the product and the hazards involved
10. Allow battery to charge for 24 hours before first use (SA version)
11. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects

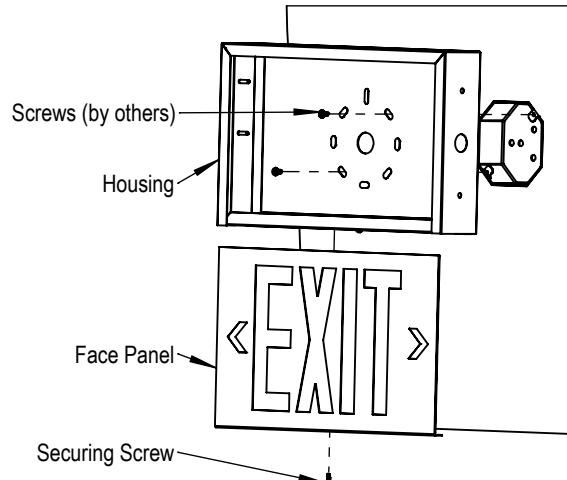
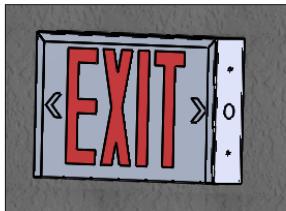
**NOTE:** THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

**WARNING**

1. Verify correct supply voltage by comparing it with the luminaire label information
2. All wiring connections should be capped with UL approved wire connectors
3. Use minimum 90°C Supply Wires

**CAUTION**

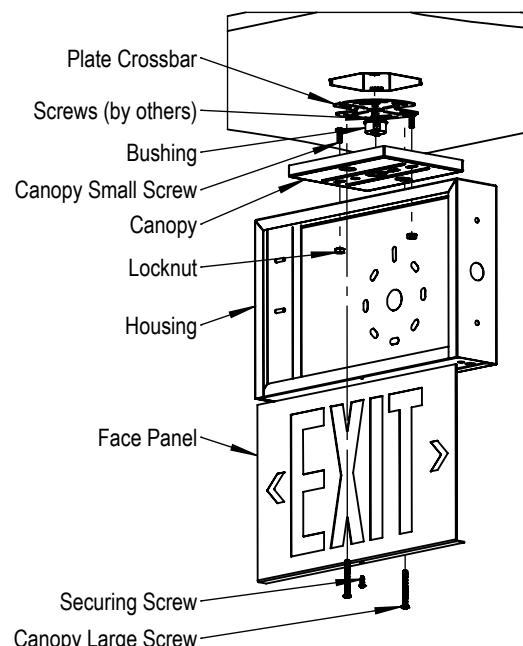
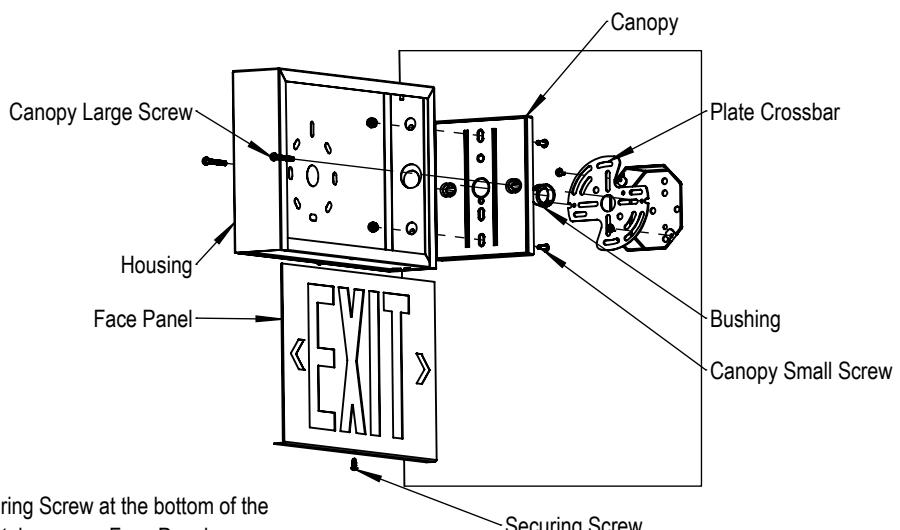

1. Avoid direct eye exposure to the light source while it is on
2. Beware- small parts and packing material may be hazardous to children
3. Risk of burn; Disconnect power and allow fixture to cool before handling fixture

**SAVE THESE INSTRUCTIONS****SURFACE MOUNT (WALL)**

1. To remove Face Panel from the Housing, remove Securing Screw at the bottom of the Face Panel. Then slide the Face Panel down to completely remove Face Panel
2. For conduit, remove slotted knock-out on J-box and knock-out on the Housing (typ. .875" for 1/2 trade conduit fitting)
3. Install Housing directly to wall or J-box (typ. 4" Octagonal J-box)
4. Make electrical connections inside Housing (see pg 3)
5. Re-install Face Panel

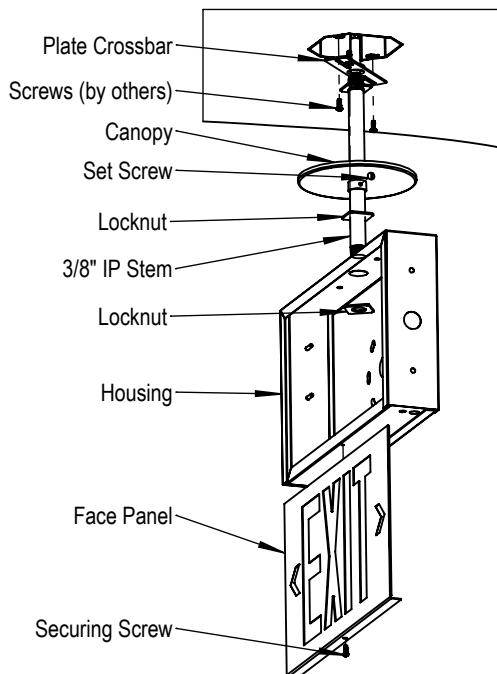
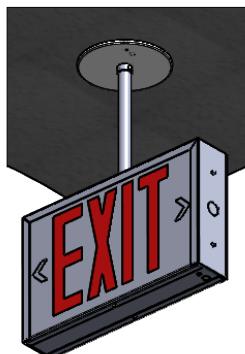
**CEILING MOUNT**

1. To remove Face Panel from the Housing, remove Securing Screw at the bottom of the Face Panel. Then slide the Face Panel down to completely remove Face Panel
2. Remove wireway & screw hole knock-outs on the Housing
3. Snap the Bushing into the Housing
4. Install Housing & Canopy together with screws & locknuts provided
5. Install Plate Crossbar onto J-box
6. Make electrical connections inside Housing (see pg 3)
7. Attach the Exit sign assembly to Plate Crossbar on the J-box
8. Re-install Face Panel

**WALL END MOUNT**

1. To remove Face Panel from the Housing, remove Securing Screw at the bottom of the Face Panel. Then slide the Face Panel down to completely remove Face Panel
2. Remove wireway & screw hole Knock-outs on the Housing
3. Snap the Bushing into the Housing
4. Install Housing & Canopy together with screws & locknuts provided
5. Install Plate Crossbar onto J-box
6. Make electrical connections inside Housing (see pg 3)
7. Attach the Exit sign assembly to Plate Crossbar on the J-box
8. Re-install Face Panel

## PENDANT MOUNT



1. To remove Face Panel from the Housing, remove Securing Screw at the bottom of the Face Panel. Then slide the Face Panel down to completely remove Face Panel
2. Remove wireway knock-out on the Housing
3. Install Stem on Housing using Locknuts from Canopy Kit
4. Install Canopy on Stem (do not tighten Set Screw)
5. Install the top end of Stem onto the Plate Crossbar, then secure the Plate Crossbar to J-box
6. Feed wires from J-box to the Housing
7. Make electrical connections inside Housing (see below)
8. Re-install Face Panel

## WIRING DIAGRAM

