

ATX RECESSED (ATX RE)

Job: _____ Type: _____
 Model: _____ Date: _____




internal

The ATX Recessed (ATX RE) is offered in HT (AC only) or SA (Self-Powered). It comes standard configured with high-output LED technology and 120/277V input. Nickel-cadmium batteries provide a minimum 90 minutes of emergency duration. 120 minute duration battery is available. Solid state charger & transfer. CSA C22.2 No. 141 Performance Certified. Fuse protection is standard.

external

The ATX RECESSED series of commercial aluminum face exit signs featuring an in-wall installation provide a clean and architecturally pleasing appearance. Ideal for commercial and institutional installations, this recessed fixture blends perfectly with current interior decors. ATX RECESSED exits configured for AC/DC operation feature a universal DC input; 6VDC - 24VDC backup voltages are standard. The ATX RECESSED is available configured with high-output LEDs in AC only, AC/DC and self-powered operation versions. White finish is standard.

dimensions (in,mm)

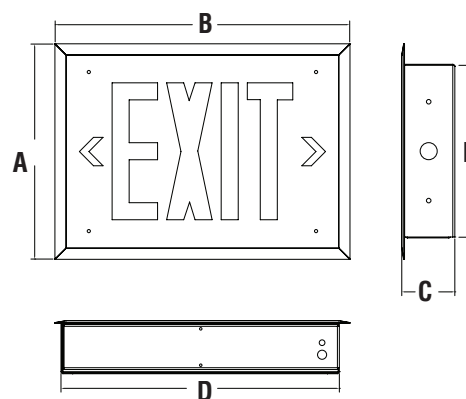

Series	A	B	C	D	E
ATX RE	9 ¹ / ₂ " (241mm)	14 ¹ / ₄ " (362mm)	2 ¹ / ₄ " (57mm)	12 ¹ / ₄ " (311mm)	7 ⁵ / ₈ " (193mm)

ordering information

EXAMPLE: ATX RE SA LR1 AT BLK

Series	Model	LED	Face No.	Options
ATX RE	HT (AC only)	LR (red)	1 (single)	120SA (120 min. emergency)
	SA (self-powered)	LG (green)		2CK (dual circuit)
				AT (autotest - for SA model only)
				BA (brushed aluminum)
				BLK (black)
				CC (custom color- specify)
				SW ¹ (special wording- specify)
				TP (tamper proof screws)

Accessories
WG 3DX16.5LX14W WHT (wireguard)

NOTE: RECESSED WALL MOUNT ONLY; Must specify AC
 NOTE 1: SW only available in HT

■ electrical

BATTERY: The **ATX RECESSED** series is configured with high-output LED lamps. Standard with 120/277VAC input. The **ATX** consumes only 2W nominal power. Optional UDC emergency illumination is provided by the LED light source at the following wattages: 6VDC - 24VDC, 2 watts. The battery operating temperature is from 50°F up to 104°F (10°C up to 40°C).

The **ATX RECESSED SA** is designed with a maintenance free, nickel-cadmium battery providing a minimum emergency duration of 90 minutes. An optional 120 minute nickel-cadmium battery is available. Recharge time of the battery is less than forty eight [48] hours.

■ mechanical

The **ATX** is constructed of sturdy 20 gauge steel. Universal mounting pattern and key hole slots are stamped on the backplate and steel angle brackets. Surface mount conduit entry knockouts are also provided. Field removable directional chevron arrows are standard. The **ATX** is supplied standard with an attractive and durable white, baked powder coat finish. Other colours are available, including custom colour matching, please specify. The faceplate is held securely in place with 4 screws.

■ self-powered versions

The **ATX RECESSED SA** self-powered series is designed to operate on battery power in the event of a power failure. Both the battery and charger are completely contained within the standard enclosure. There are no external components and no alterations made to the external dimensions of the standard sign. The **ATX SA** self-powered series utilize a solid state transfer technology that eliminates the possibility of relay failure due to particle build up on the relay. Status is easily determined via an LED that indicates AC-ON. A push button test switch allows maintenance personnel to quickly confirm the operational status of the exit on AC fail.

■ autotest

The Beghelli autotest system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 90 minute discharge tests, 48 hours apart. This tests both full battery capacity and recharge capability, as required by the fire code. The information is communicated simply and intuitively to maintenance personnel via a single multi-color LED. No need to memorize complex indicator protocols. No confusing array of multiple, same coloured LEDs that can be difficult to read from floor level.

■ warranty

The **ATX** comes with a 5-year factory warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.