

PACO AQUA COMBO (PCHA)



TITLE 20



Job: _____
 Model: _____

Type: _____
 Date: _____



Wet Location Architectural Exits


internal

The **Paco Aqua Combo (PCHA)** is the newest addition to our Paco series. The **Paco Aqua Combo** features performance and reliability in a compact and attractive unit. The **Paco Aqua Combo** has dual input 120/277V and uses a rechargeable, maintenance free Ni-Cd battery. The circuit board features an onboard solid state transformer, low voltage disconnect and brownout protection. Available in either red or green LEDs consuming less than 2W.

external

The **Paco Aqua Combo** is UL924 Listed for Wet Locations and is constructed from high impact corrosion resistant, thermoplastic. The UV resistant polycarbonate faceplate has an integrated gasket to ensure ingress protection. The Paco Aqua Combo includes two sealed and gasketed 3.6V, 1.17W weatherproof heads. Removable chevrons allow for on-site selection. The Paco Aqua Combo comes standard in white. Integrated test switch/monitor LED gives immediate unit status.

dimensions (in, mm)

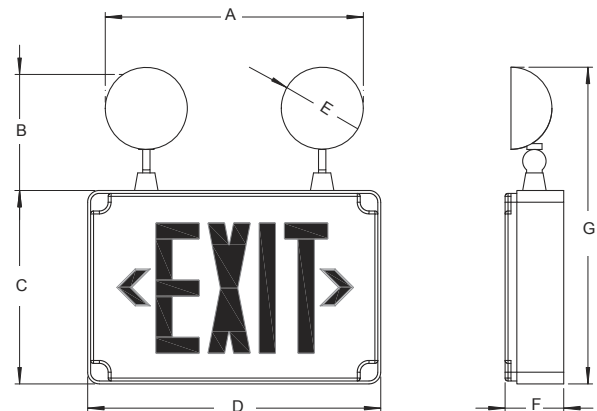

Series	A	B	C	D	E	F	G
PCHA	11.01"	4.95"	8.25"	12.5"	3.5"	2.5"	13.5"
	279.6mm	123.73mm	209.5mm	317.50mm	88.9mm	63.5mm	343.11mm

ordering information

Model	Description
PCHAGAT*	Combo, green LED, universal face / mount, 2x1.17W 3.6V LED heads, white, autotest
PCHAGATRC*	Combo, green LED, universal face / mount, 2x1.17W 3.6V LED heads, white, autotest, 3W remote capable
PCHAGRC*	Combo, green LED, universal face / mount, 2x1.17W 3.6V LED heads, white, 3W remote capable
PCHAR*	Combo, red LED, universal face / mount, 2x1.17W 3.6V LED heads, white
PCHARAT*	Combo, red LED, universal face / mount, 2x1.17W 3.6V LED heads, white, autotest
PCHARATRC*	Combo, red LED, universal face / mount, 2x1.17W 3.6V LED heads, white, autotest, 3W remote capable
PCHARRC*	Combo, red LED, universal face / mount, 2x1.17W 3.6V LED heads, white, 3W remote capable

*Case quantities apply, refer to price book and consult factory

Accessories

WG6DX16.5LX14WWHT Wireguard (wall mount), white



PACO AQUA COMBO (PCHA)

■ emergency heads

Two fully adjustable LED heads ensure emergency lighting performance, accurate positioning and reduced maintenance. Each emergency head totals 1.17W. **Paco Aqua Combo** has remote capable option (RC) to operate single head or double head remotes. Max load per unit: 3W. Compatible with Beghelli Paco PRWP remote heads.

■ electrical

BATTERY: The **Paco Aqua Combo** is designed with a 3.6V 900mAH maintenance free sealed nickel cadmium battery that provides minimum emergency duration of 90 minutes. The recharge time of the battery is 24 hours.

CIRCUIT: The **Paco Aqua Combo** has a 120/277V solid state transformer. Low voltage disconnect and brownout protection are standard. Red or green LEDs totaling <2W.

■ mechanical

Paco Aqua Combo features a modern design, a low profile, rounded corners and an overall reduced size making the **Paco Aqua Combo** one of the smaller, code compliant exit signs available. The quick connect installation system allows for effortless surface mount installation. **Paco Aqua Combo** comes standard with universal face (2 stencils & 1 back plate) and mounting canopy. The **Paco Aqua** operating temperature is 10°C to 40°C.

■ self-powered

The **Paco Aqua Combo** is designed to operate on battery power in the event of regular / mains power failure. Both the battery and charger are completely contained within the standard sign. There are no external components and no alteration made to the external dimensions of the standard sign. Status is easily determined via an LED that indicates AC-ON. A push button test switch allows maintenance personnel to quickly confirm the operational status of the exit at any time.

■ remotes

Remotes compatible with the **Paco Aqua Combo**.

MODEL	# of Heads	Voltage/Wattage
PR1WP	1	3.6V/ 1.17W
PR2WP	2	3.6V/ 2.34W

■ warranty

The **Paco Aqua Combo** comes with a 3-year factory warranty. Deliberate damage, misuse, improper installation effectively void the warranty. For complete warranty details see online.