

PACO AQUA EXIT



Job: _____
 Model: _____
 Type: _____
 Date: _____



internal


The **Paco Aqua Exit (PXA)** is the newest edition to our **Paco** series. It has dual input 120/277V and is offered as AC only and self-powered. The **Paco Aqua Exit** self powered version uses a rechargeable, maintenance free 3.6V 900mAH nickel cadmium battery. The circuit board features an onboard solid state transformer, low voltage disconnect and brownout protection. Available in either red or green LEDs consuming less than 2W.

external

The **Paco Aqua Exit** is UL924 listed for wet location and features performance and reliability in a compact and attractive unit. It is constructed from high impact and corrosion resistant, thermoplastic.

The UV resistant polycarbonate faceplate has an integrated gasket to ensure ingress protection. Removable chevrons allow for onsite selection. The Paco Aqua Exit comes standard in white. The SA version includes a sealed test switch and status indicator, which gives immediate unit status.

dimensions (in,mm.)

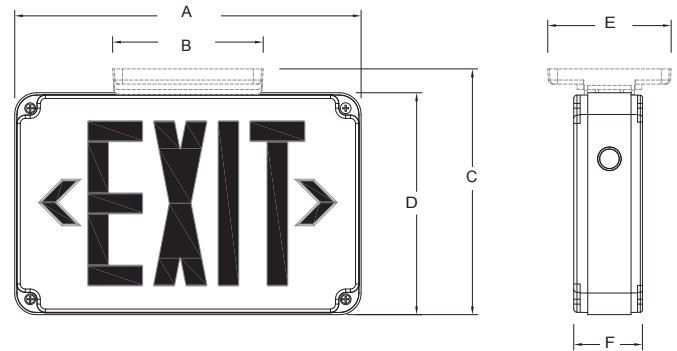

Series	A	B	C	D	E	F
PXA	12.5"	5.5"	9"	8.25"	4.5"	2.5"
	317.50mm	139.7mm	228.6mm	209.5mm	114.3mm	63.5mm

ordering information

Model	Description
PXAGHT	Exit, AC only, green LED, universal face and mount, white
PXAGSA	Exit, AC & EM, green LED, universal face and mount, white
PXAGSAAT*	Exit, AC & EM, green LED, universal face and mount, white, autotest
PXAGSAATRC*	Exit, AC & EM, green LED, universal face and mount, white, autotest, 3W remote capable
PXAGSARC*	Exit, AC & EM, green LED, universal face and mount, white, 3W remote capable
PXARHT	Exit, AC only, red LED, universal face and mount, white
PXARSA	Exit, AC & EM, red LED, universal face and mount, white
PXARSAAT*	Exit, AC & EM, red LED, universal face and mount, white, autotest
PXARSARC*	Exit, AC & EM, red LED, universal face and mount, white, 3W remote capable
PXARSARCAT*	Exit, AC & EM, red LED, universal face and mount, white, 3W remote capable, autotest

* Case quantities may apply, refer to price book and consult factory

Accessories

WG3DX16.5LX14WWHT	Wireguard (wall mount), white
WG14.5DX12.5LX6.5WWHT	Wireguard (ceiling mount), white

PACO AQUA EXIT

■ electrical

BATTERY: The **Paco Aqua Exit** self-powered version is designed with a 3.6V 900mAH maintenance free nickel cadmium battery that provides minimum emergency duration of 90 minutes. The recharge time of the battery is 24 hours. The battery operating temperature is from 32°F up to 104°F (0°C to 40°C).

CIRCUIT: The **Paco Aqua Exit** has a 120/277V solid state transformer. Low voltage disconnect and brownout protection are standard. Red or green LEDs totaling <2W.

■ mechanical

The **Paco Aqua Exit** is designed for surface wall or ceiling installations. Suitable for wet location environments. The thermoplastic housing comes in white as standard. The **Paco Aqua Exit** is available with or without battery back-up and comes standard with universal face (2 stencils & 1 back plate) and mounting canopy. The **Paco Aqua** operating temperature is 0°C to 40°C.

■ remote capable

Paco Aqua Exit has remote capable option (RC) for operating single head or double head remotes. Max load per unit: 3W. Compatible with Beghelli Paco PRWP (1.17W/ head) remote heads only.

MODEL	# of Heads	Voltage/Wattage
PR1WP	1	3.6V/ 1.17W
PR2WP	2	3.6V/ 2.34W

■ self-powered

The **Paco Aqua Exit** self-powered is designed to operate on battery power in the event of regular / mains power failure. Both the battery and charger are completely contained within the standard sign. There are no external components and no alterations made to the external dimensions of the standard sign. Status is easily determined via an LED that indicates AC-ON. A push button test switch allows maintenance personnel to quickly confirm the operational status of the exit at any time.

■ warranty

The **Paco Aqua Exit** comes with a 5-year factory warranty. Deliberate damage, misuse, improper installation effectively void the warranty. For complete warranty details see online.