

Type: \_\_\_\_\_

Project: \_\_\_\_\_

# LEDLUMINA

**TITLE**  
**20**
**TITLE**  
**24**


## BS400LED - MID BAY/ GARAGE LIGHT

- The **LEDLUMINA** BS400LED is a modern, ultra low profile, glare-free, energy saving solution that is scalable to your project
- The **LEDLUMINA** BS400LED features a surface mount bracket with quick connect for ease of installation and stainless steel hardware
- **DIFFUSER:** Frosted UV stabilized polycarbonate diffuser provides even light distribution; Reflected light technology efficiently controls glare
- **HOUSING:** Die-cast, copper-free aluminum
- **LUMENS:**
  - LO (30W): 3571 up to 3779 lm (SA: 16W, 1881 lm)
  - MO (45W): 5358 up to 5671 lm (SA: 16W, 1881 lm)
  - HO (60W): 6980 up to 7282 lm (EM: 17W, 2190 lm)
- **OPERATING TEMPERATURES:**
  - HT: -40 to 40°C (-40 to 104°F)
  - SA (MO & LO): 0 to 25°C (32 to 77°F)
  - EM (HO): 0 to 50°C (32 to 122°F)

### OPTIONS:

- Integral and remote emergency egress solutions
- Beghelli lighting control options (see Beghelli Controls section)
- Surge and fuse protection

**WEIGHT:** 14 lbs / 6.3 kg



**APPLICATION:** The **BS400LED** has been specifically designed to meet parking structure requirements. It's also ideal for other applications including retail stores, industrial installations, warehouses, breezeways, canopies, schools and much more. It can be installed both indoor and outdoor.

## ORDERING INFORMATION

Example: BS400LED HT HO WT40 120-277V

MODEL	OPERATION	OUTPUT	COLOR TEMP	INPUT	OPTIONS	
BS400LED	HT (AC only)	LO	WT30 (3000K)	120-277V	EM-RMT <sup>2</sup> (remote mount EM backup - 90 min runtime)	IS <sup>4,5</sup> (internal occ sensor)
	SA <sup>1</sup> (AC & EM)	MO	WT40 (4000K)	347-480V	EM-CT <sup>3,10</sup> (integrated cold temperature EM pack)	NOD <sup>5</sup> (integrated node)
		HO	WT50 (5000K)		FP (inline fuse protection - 3A)	SP (surge protection - 10 kA)

### CONTROLS & ACCESSORIES

1PKxWBS400 <sup>6,7</sup> (single pendant kit, white, x=length)	EMDCB <sup>5</sup> (BT wireless motion & lux sensor)	TM22BS400 <sup>7</sup> (22" height trunnion mount)
1SPKxWBS400 <sup>6,7</sup> (swivel pendant kit, x=length)	HHRFSIR <sup>8</sup> (handheld remote for FSP221)	
1XACx <sup>6,7</sup> (adjustable aviation cable, x=length)	MLM1 <sup>5</sup> (wireless motion and lux sensor)	
4CH48 <sup>6,7</sup> (48" chain hang kit, 4 pieces)	RLY <sup>5</sup> (wireless relay)	
	SW1 <sup>5</sup> (single rocker wall switch)	

**NOTE 1:** SA for LO & MO only (120-277V); 16W; 1881lm. CEC Title 20; Comes with test switch and LED indicator

**NOTE 2:** HT Only, all models

**NOTE 3:** HT Only, LO & MO Models

**NOTE 4:** IS is std Beghelli sensor, FSP 221, Magnum ISM1 and other sensors are available

**NOTE 5:** Beghelli offers wireless and powerless control solutions, contact factory for more details

**NOTE 6:** Pendant kit includes bracket on back of fixture, stem and ceiling canopy; standard stem length represented by "x" = 12 (12"), 24 (24") and 48 (48")


**NOTE 7:** Consult factory for non-standard lengths

**NOTE 8:** FSP221 utilizes HHRFSIR handheld remote accessory for programming


**NOTE 9:** Consult factory

**NOTE 10:** Cold temp. emergency pack option for SA models; 120-277V; down to -20°C (-4°F); 14W; 1750 lm


## TECHNICAL INFORMATION

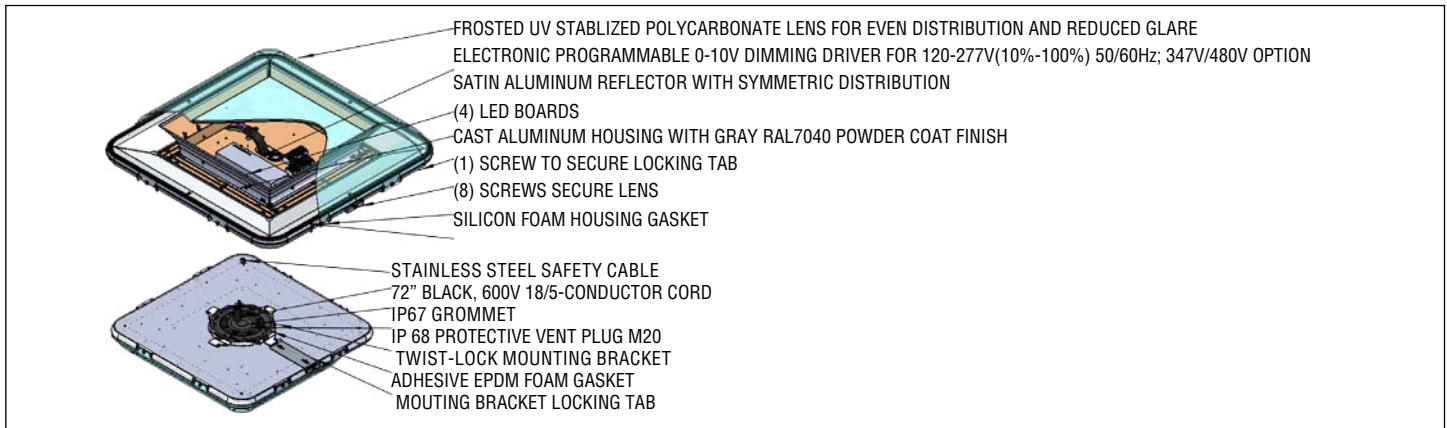


## DIMENSIONS

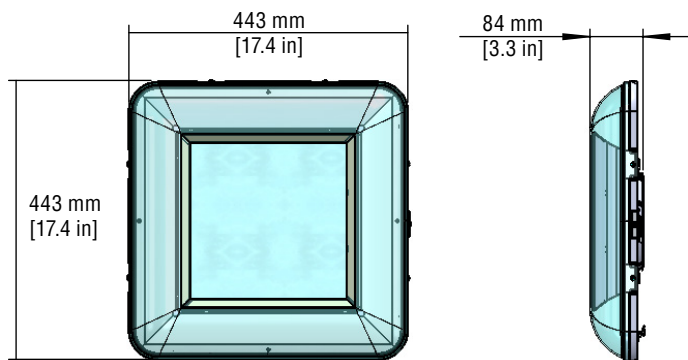

## SURFACE MOUNTING (STANDARD WITH BRACKET)

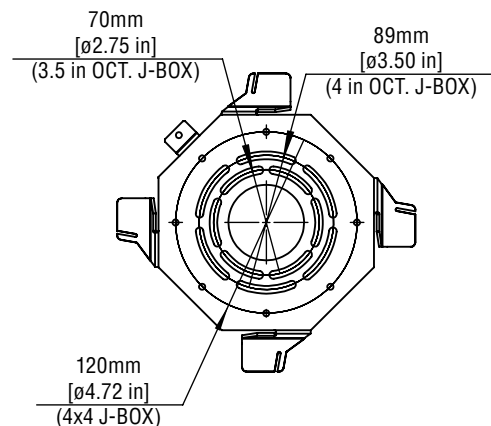

## MOUNTING OPTIONS

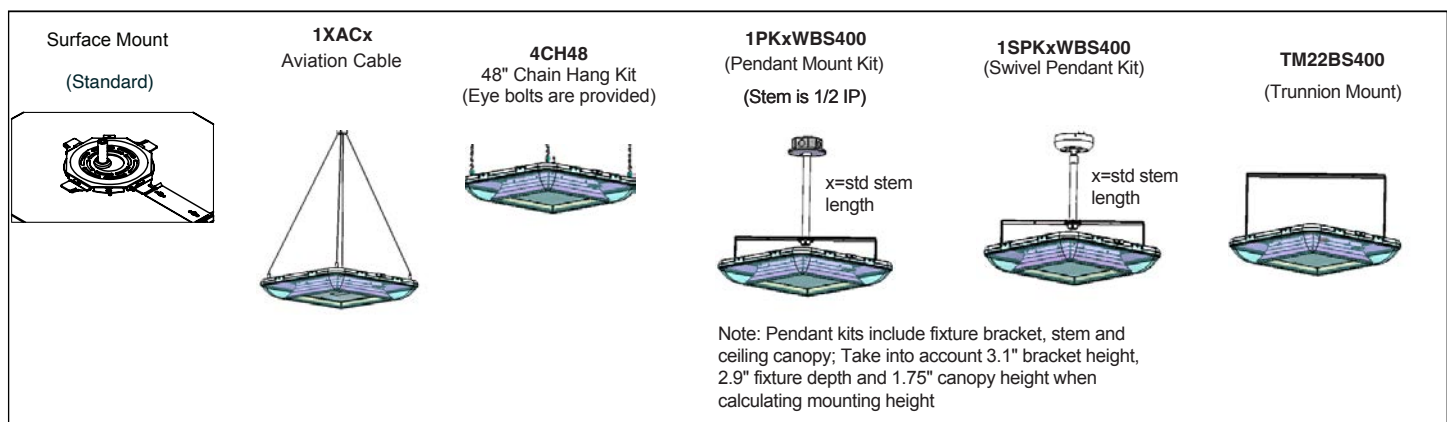


# LEDLUMINA BS400LED


## PHOTOMETRICS

**BS400LEDHTLOWT40120-277V**

POLAR CURVES




ISOLINES




**BS400LEDHTMOWT40120-277V**

POLAR CURVES




ISOLINES




**BS400LEDHTHOWT40120-277V**

POLAR CURVES



ISOLINES



## ENERGY CHART

MODEL	EFFICACY	CONSUMPTION WATTAGE	LUMEN OUTPUT*	CRI	L70 (HRS) REPORTED/ PROJECTED
BS400LED-HT-LO-WT30-120-277V	119 LPW	30W	3571 LM	>80	>60,000/ 100,000
BS400LED-HT-LO-WT40-120-277V	125 LPW	30W	3753 LM	>80	>60,000/ 100,000
BS400LED-HT-LO-WT50-120-277V	126 LPW	30W	3779 LM	>80	>60,000/ 100,000
BS400LED-HT-MO-WT30-120-277V	119 LPW	45W	5358 LM	>80	>60,000/ 100,000
BS400LED-HT-MO-WT40-120-277V	125 LPW	45W	5632 LM	>80	>60,000/ 100,000
BS400LED-HT-MO-WT50-120-277V	126 LPW	45W	5671 LM	>80	>60,000/ 100,000
BS400LED-HT-HO-WT30-120-277V	115 LPW	60W	6900 LM	>80	>60,000/ 100,000
BS400LED-HT-HO-WT40-120-277V	121 LPW	60W	7233 LM	>80	>60,000/ 100,000
BS400LED-HT-HO-WT50-120-277V	121 LPW	60W	7282 LM	>80	>60,000/ 100,000

\* +/- 5%

# LEDLUMINA BS400LED

ADDITIONAL INFORMATION

## ELECTRICAL RATING







PRODUCT	NOMINAL POWER (W)	AC CURRENT (A) AC VOLTAGE		FREQUENCY (HZ)	DC VOLTAGE (V)	DC CURRENT (MA)
		120 V	277 V			
BS400LED-HT-LO	30	0.26	0.11	50/60	36	800
BS400LED-HT-MO	45	0.38	0.17	50/60	33	1200
BS400LED-HT-HO	60	0.51	0.22	50/60	34	1550



## DIMMER COMPATIBILITY

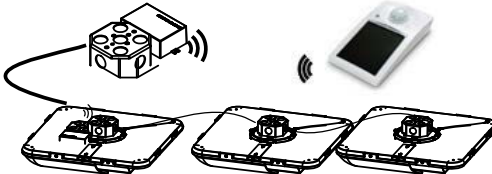DIMMER	COMPATABILITY	
	ON/OFF	DIMMING
LEVITON - AWRMG-7	YES	YES
LUTRON - DIVA - DVSTV	YES	YES

■ **WARRANTY:** 5 years, see website for full warranty details.

## BEGHELLI LIGHTING CONTROL SOLUTIONS

DAISY CHAIN FIXTURES (RELAY)			INTEGRATED NODE (NOD)		
<p><b>RLY*</b> Wireless Relay (Damp Location)</p> 	<p><b>EMDCB*</b> Remote Sensor (Damp Location)</p> 	<p><b>SW1*</b> Single Switch (Damp Location)</p> 	<p><b>NOD*</b> Node</p> <p>NODE</p> 	<p><b>EMDCB*</b> Remote Sensor (Damp Location)</p> 	<p><b>SW1*</b> Single Switch (Damp Location)</p> 
			<p>SW1<sup>5</sup> (single BT wireless switch)</p>		

INTERNAL NODE & SENSOR (IS)		
<p><b>IS (Beghelli standard)</b> (Wet Location)</p>  <p>(ON LENS)</p>	<p><b>SW1*</b> Single Switch (Damp Location)</p> 	<p><b>DEFAULT SETTING:</b></p> <ul style="list-style-type: none"><li>• 100% @ Occupied</li><li>• 50% After 30 minutes without occupation</li><li>• OFF after an additional 30 minutes without occupation</li></ul>
<p>Internal occ sensor options: <b>ISM1*, FSP221, etc.</b></p>		

\* Magnum control options also available (RLYM1 relay, SW1M1 switch, NODM1 node and ISM1 sensor)

\*\* Beghelli offers wired and wireless control solutions. Beghelli fixtures are compatible with most control solutions available in the market. Consult factory for more details.