


2nd generation

56.95 L/W, 1376 lumens and 4.8W/ft
(for a 4ft fixture)

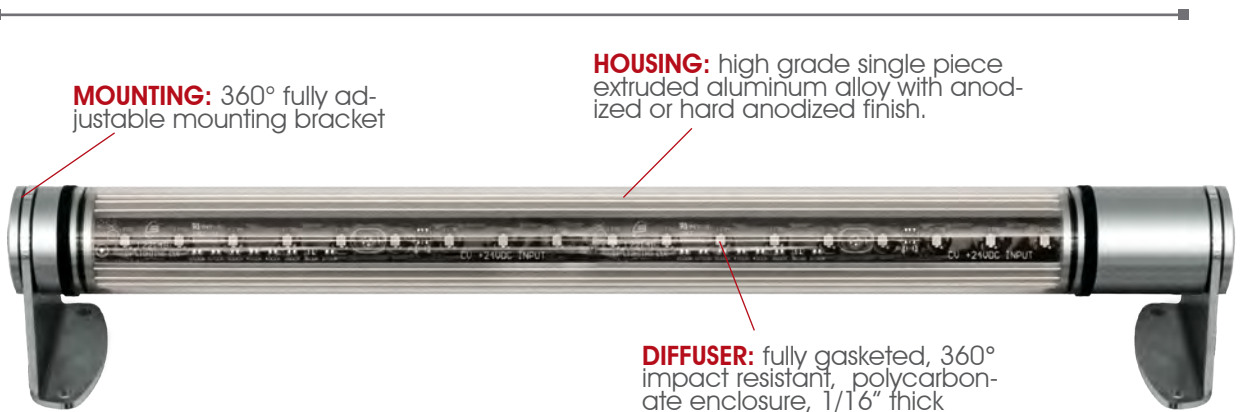

MOUNTING: 360° fully adjustable mounting bracket

HOUSING: high grade single piece extruded aluminum alloy with anodized or hard anodized finish.

DIFFUSER: fully gasketed, 360° impact resistant, polycarbonate enclosure, 1/16" thick

Available in 2ft, 4ft, 6ft or custom lengths (can be no longer than 6ft per unit & must be in increments of 1ft)

Feature

Benefit

- **3 standard color temperatures (custom available)**

- 3500K, 4100K and 5700K
- RGB, single colors and custom colors

- **6.04W per linear foot**

- Energy savings

- **Impact resistant polycarbonate diffuser**

- Full length gasketing
- IP67 protection
- 0.0625" thick impact resistant diffuser

- **High efficiency LED's Powered by Samsung**

- 56.95 lumens per watt, (1376 lumens in 4ft unit)
- LM70 rated for >60,000+

- **Designed to fit your project**

- Standard 2ft, 4ft and 6ft lengths
- Custom lengths available in 1ft increments (6ft max)

- **Sanitation listed**

- Ideal for food processing applications

features + benefits



LED

Wet/IP67




Meets BAA

The SPYDER MINI® is ideal for:

- Signs
- Wall Washing
- Water Features
- Row Lighting
- Under Railings
- Offices
- Hotels And Retail
- Food processing



Bridge 550 - Pawtucket, Ri
Photo by: Frank C. Grace

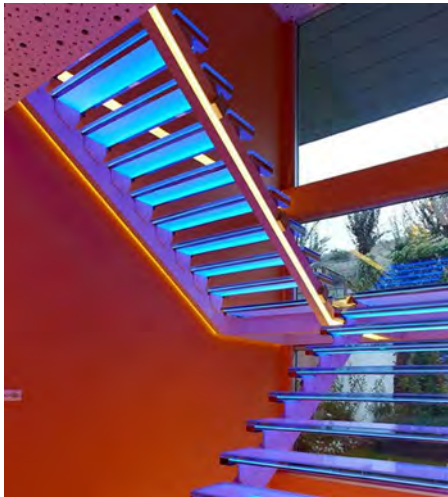

Bridge 550 - Pawtucket, Ri
Photo by: Frank C. Grace

ENERGY COMPARISON CHART

MODEL	EFFICACY (lm/W)	CONSUMPTION WATTAGE	DELIVERED LUMENS	CRI	Beam angle	AMBIENT TEMP	L70 hrs. (at 55°C)
SMLED-IP67-4-WT41-NOL-24VDC	56.95	24.16	1376	83.3	47.4°	24.6°C	60,000+