

INSTALLATION INSTRUCTION

IMPORTANT SAFEGUARDS

Read & Follow All Safety Instructions

When using electrical equipment, basic safety precautions should always be followed including:

1. Disconnect power before performing work on electrical equipment (using the light switch to turn off the power is not sufficient to prevent electrical shock)
2. Do not mount near gas or electric heaters
3. Do not install in unstable, loose or breakable surfaces and Do not let objects impact or exert force on the surface of the fixture
4. Use caution when servicing batteries (Battery acid can cause burns to skin and eyes; If acid is spilled on skin or eyes, flush with water and contact a physician immediately)
5. Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel
6. The use of accessory equipment not recommended by Beghelli Inc may cause an unsafe condition and will void the unit's warranty
7. Do not use this equipment for other than its intended purpose
8. Installation and servicing of this equipment should be performed by a qualified electrician familiar with the product and the hazards involved
9. Allow battery to charge for 24 hours before first use
10. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects



WARNING




1. Verify correct supply voltage by comparing it with the luminaire label information
2. All wiring connections should be capped with UL approved wire connectors
3. Use minimum 90°C Supply Wires




CAUTION

1. Avoid direct eye exposure to the light source while it is on
2. Beware- small parts and packing material may be hazardous to children
3. Risk of burn; Disconnect power and allow fixture to cool before handling fixture

SAVE THESE INSTRUCTIONS

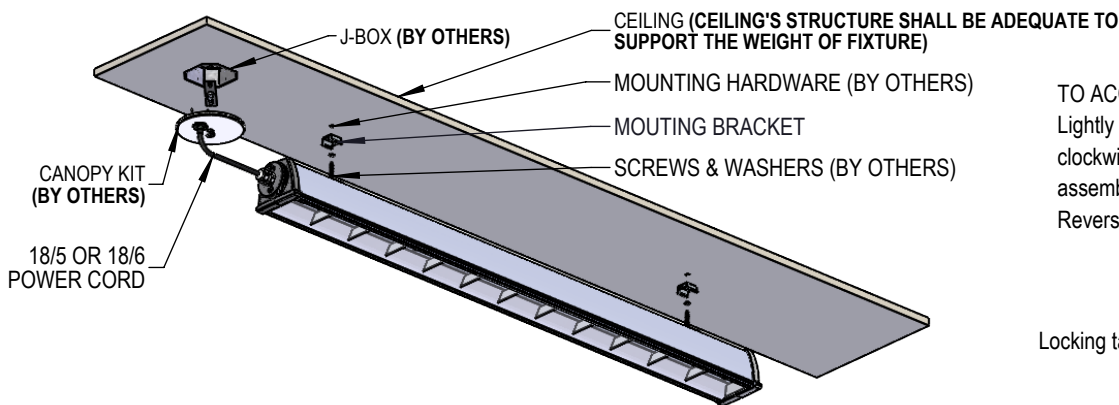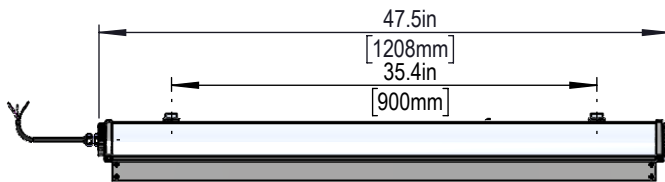


TO ACCESS ELECTRICAL ASSEMBLY:
Lightly lift of the tab, while turn the Cap counter clockwise to unlock the cap and pull to slide the electrical assembly out.
Reverse the process to re-install the electrical assembly

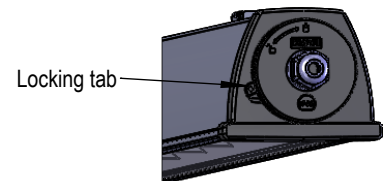

- 0-10V DIMMING WIRES MUST BE RUN FROM A DIFFERENT CONDUIT OUT OF THE J-BOX

HT VERSION




0-10V LEAD / DALI

VIOLET.....(DIM +)
GRAY.....(DIM -)

AC LEADS

BLACK..... (HOT)
WHITE.....(NEUTRAL)
GREEN..... (GROUND)

SA VERSION





0-10V LEAD / DALI

VIOLET.....(DIM +)
GRAY.....(DIM -)


AC LEADS

BLACK..... (HOT-SWITCHED/UNSWITCHED)
WHITE.....(NEUTRAL)
GREEN..... (GROUND)
RED..... (HOT-UNSWITCHED)


SURFACE MOUNT - (STANDARD)

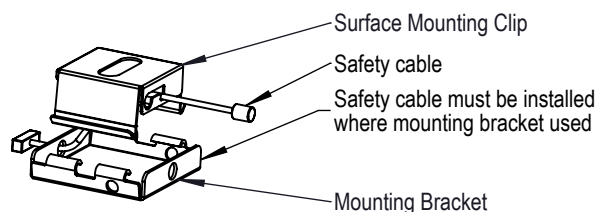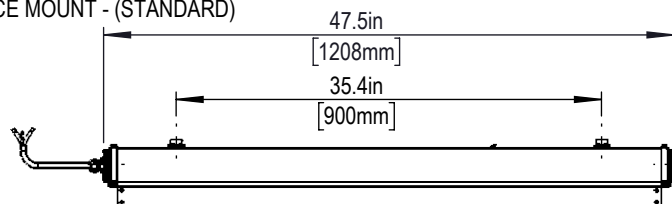


CHAIN HANG - (2CH48)

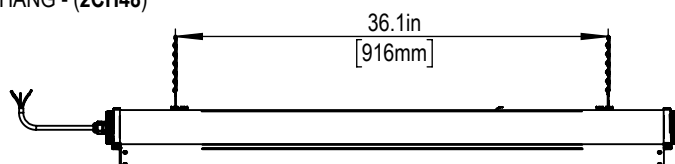



1. Insert the hook clip through the loop of the chain
2. Attach the hook clip onto the holes on the side of the bracket on the top of the housing as shown

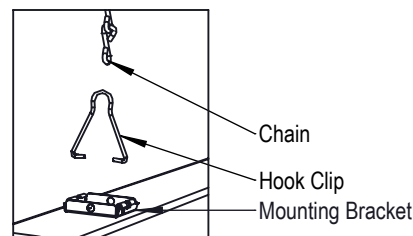


AVIATION CABLE - (2ACx: x = 50", 72")

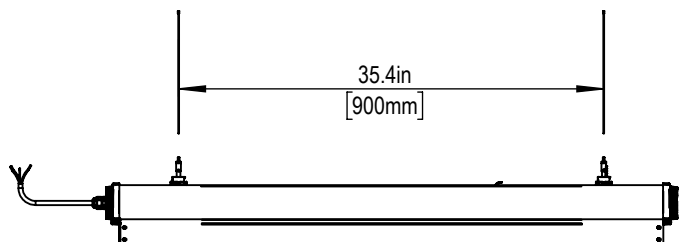


1. Attach the cable glider to the bracket using provided lock nut as shown
2. Snap the assembled surface mounting clip onto the mounting bracket on the top of the housing until the flanges hook onto the bracket
3. Thread the A/C cable through the cable glider as shown. (push top sleeve of cable glider to release lock and adjust level)

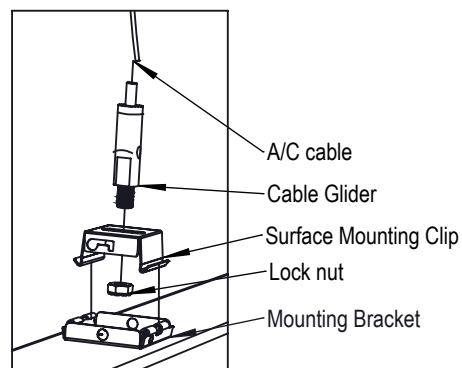


PENDANT KIT - (2PKxW: x = 12", 24", 48")

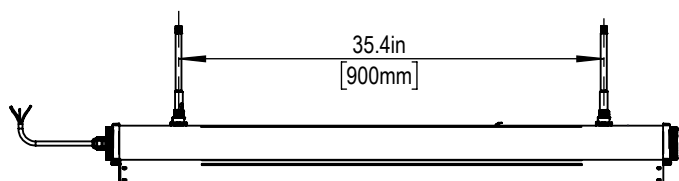


1. Attach the stem adaptor cap to the surface mounting clip using provided lock nut as shown
2. Snap the assembled surface mounting clip onto the mounting bracket on the top of the housing until the flanges hook onto the bracket
3. Attach stem adaptor & stem to the adaptor cap as shown

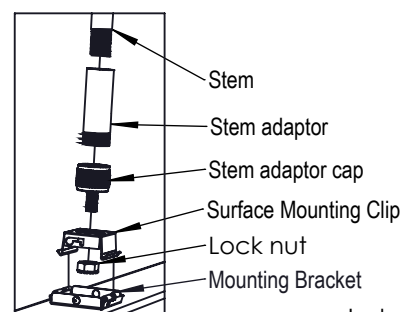


PIVOT MOUNT KIT - (PMBXE)

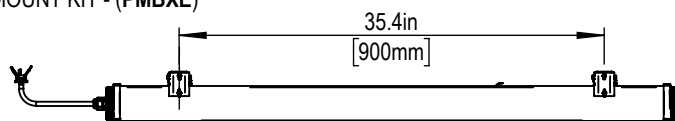

1. Attach the pivot bracket to the mounting bracket on the top of housing using provided screw & lock nut as shown
2. Attach the assembly to the wall as shown (hardware by others)
3. To adjust the aiming angle, remove the adjusting screw, reposition to the new angle, and re-install screw to lock in position

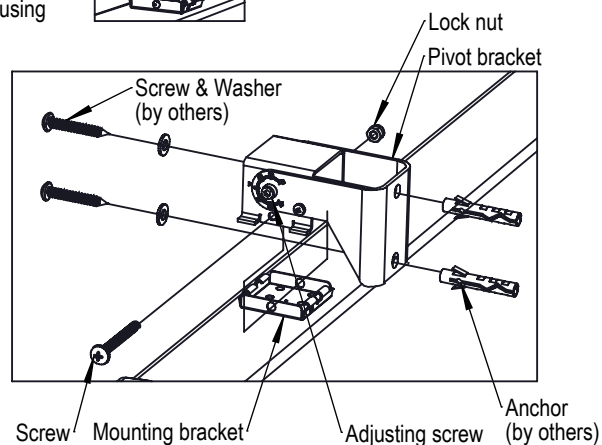

SHIELD INSTALLATION

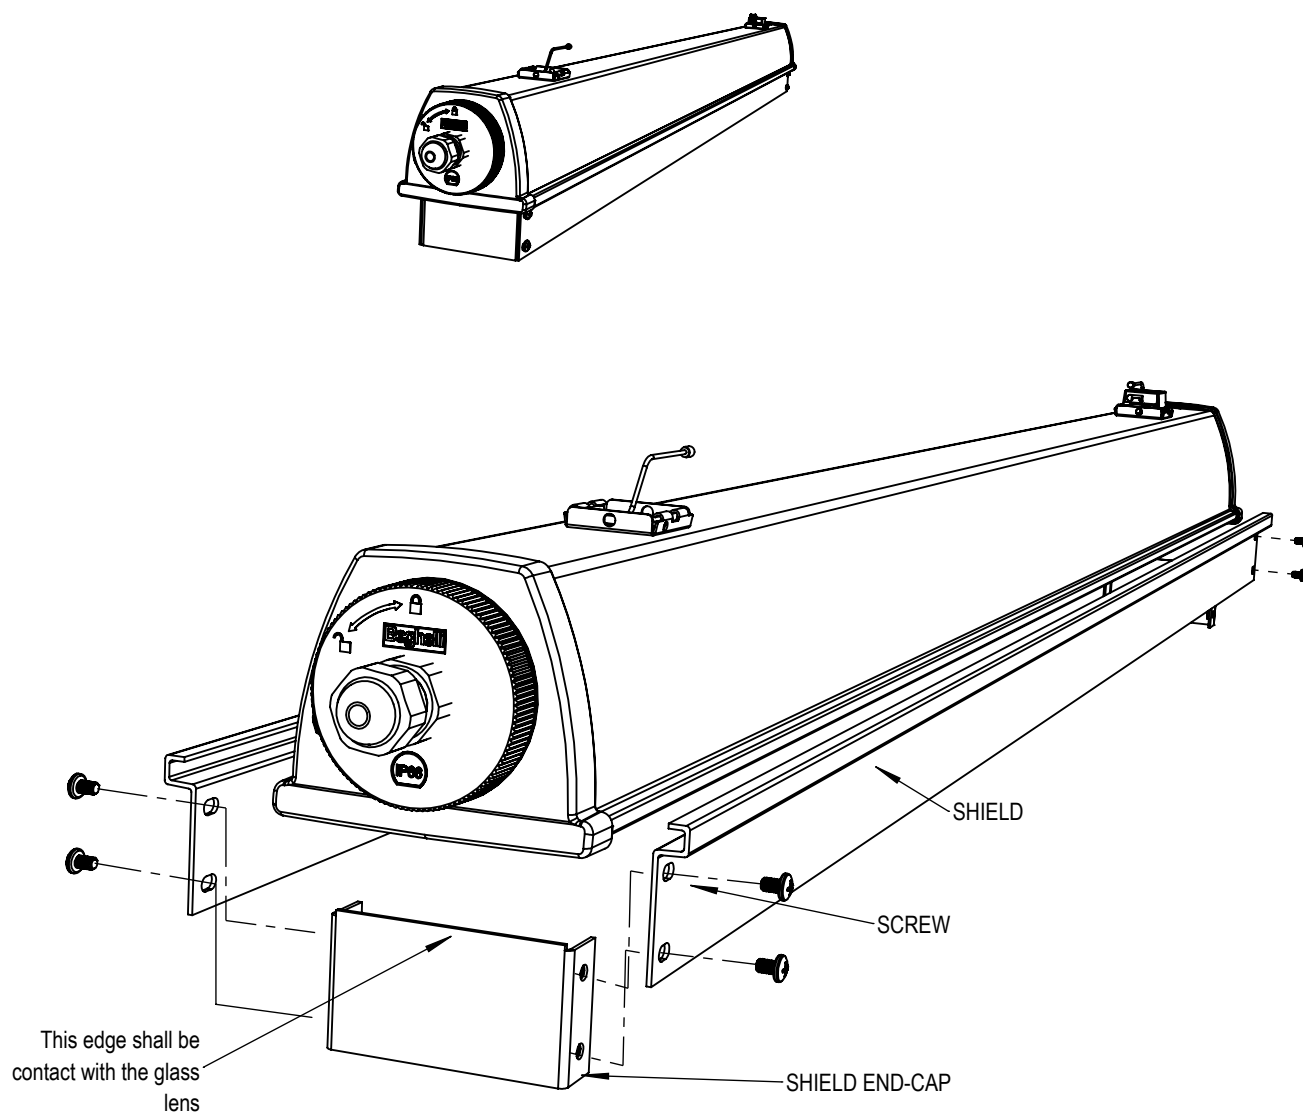

1. ATTACHED THE SHIELD END-CAPS ONTO ONE OF THE SHIELD (DO NOT TIGHTEN SCREWS)
2. ENGAGE THE GROOVE ON THE SHEILD ONTO THE HOUSING's RAIL, THEN, ATTACHED THE OTHER SHIELD ON THE OTHER SIDE WITH THE GROOVE ENGAGE ON THE HOUSING RAIL