

INSTALLATION INSTRUCTIONS

Read & Follow All Safety Instructions

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including:

1. Disconnect power before performing work on electrical equipment (using the light switch to turn off the power is not sufficient to prevent electrical shock)
2. Do not use outdoors
3. Do not mount near gas or electric heaters
4. Do not install in unstable, loose or breakable surfaces and do not let objects impact or exert force on the surface of the fixture
5. Use caution when servicing batteries (Battery acid can cause burns to skin and eyes; If acid is spilled on skin or eyes, flush with water and contact a physician immediately)
6. Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel
7. The use of accessory equipment not recommended by Beghelli Inc may cause an unsafe condition and will void the unit's warranty
8. Do not use this equipment for other than its intended purpose
9. Installation and servicing of this equipment should be performed by a qualified electrician familiar with the product and the hazards involved
10. Allow battery to charge for 24 hours before first use (SA version)
11. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects


NOTE: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

**WARNING**


1. Verify correct supply voltage by comparing it with the luminaire label information
2. All wiring connections should be capped with UL approved wire connectors
3. Use minimum 90°C Supply Wires


**CAUTION**

1. Avoid direct eye exposure to the light source while it is on
2. Beware- small parts and packing material may be hazardous to children
3. Risk of burn; Disconnect power and allow fixture to cool before handling fixture

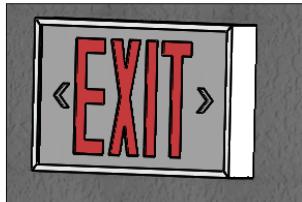
SAVE THESE INSTRUCTIONS**SURFACE MOUNT (WALL)**

1. To remove Stencil from the fixture, push Stencil upward and pull the bottom of the Stencil away from housing. Then pull down and remove the Stencil as shown
2. For conduit, remove slotted knock-out in J-box and knock-out in the Housing for conduit (typ. .875" for 1/2 trade conduit fitting)
3. Install Housing directly to wall or J-box (typ. 4" Octagonal J-box)
4. Make electrical connections (see pg 4)
5. Re-install Stencil

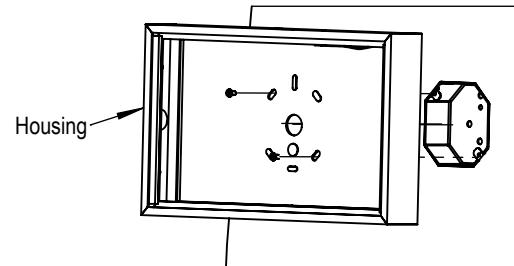


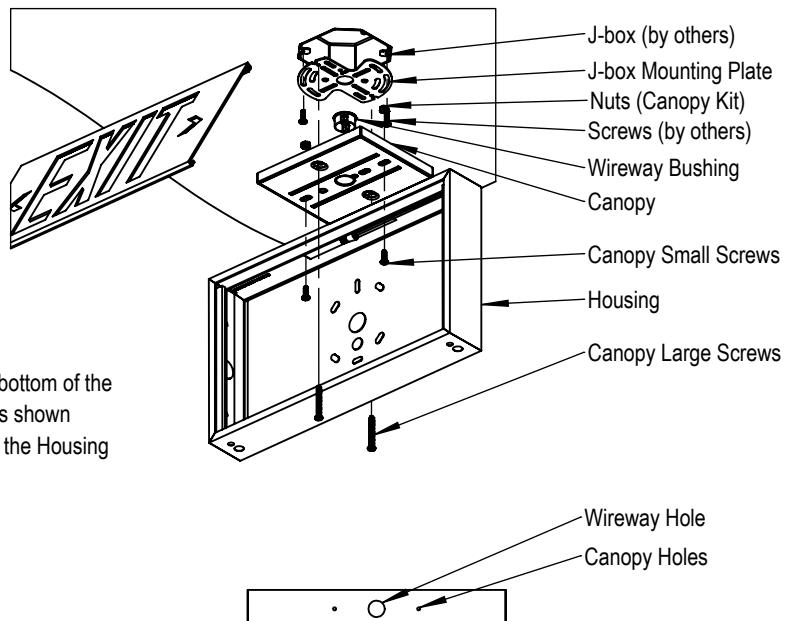CEILING MOUNT



1. To remove Stencil from the fixture, push Stencil upward and pull the bottom of the Stencil away from housing. Then pull down and remove the Stencil as shown
2. Remove slotted Knock-out for Canopy and Knock-out for wireway on the Housing
3. Snap the Wireway Bushing onto the wireway hole of the canopy
4. Install Canopy to Housing
5. Feed the wires thru the Housing, Canopy and J-box Mounting Plate
6. Make electrical connections in the J-box (see page 4)
7. Attach the J-box Mounting Plate to J-box with Screws (by others)
8. Install the assembly to J-box Mounting Plate
9. Re-install Stencil

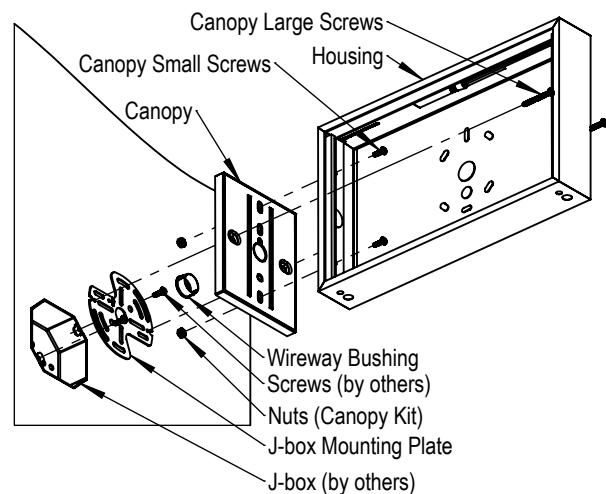END MOUNT

1. To remove Stencil (see step 1 in Ceiling Mount)
2. Remove slotted Knock-out for Canopy and Knock-out for wireway on the Housing
3. Snap the Wireway Bushing onto the wireway hole of the canopy
4. Install Canopy to Housing
5. Feed the wires thru the Housing, Canopy and J-box Mounting Plate
6. Make electrical connections in the J-box (see page 4)
7. Attach the J-box Mounting Plate to J-box with Screws (by others)
8. Install the assembly to J-box Mounting Plate
9. Re-install Stencil

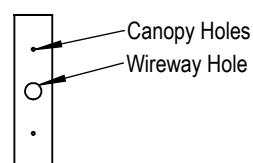

PENDANT MOUNT

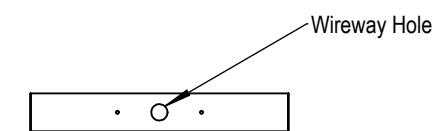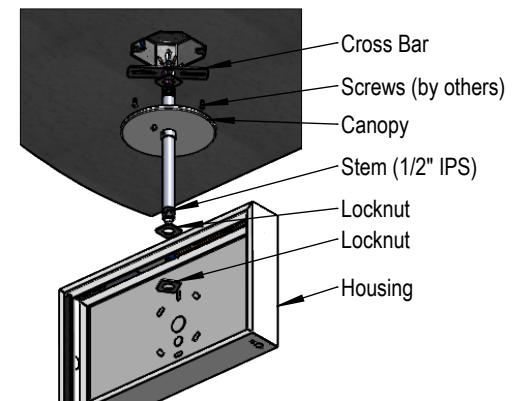

1. To remove Stencil from the fixture, push Stencil upward and pull the bottom of the Stencil away from housing. Then pull down and remove the Stencil as shown
2. Remove slotted Knock-out for wireway on the Housing
3. Attach Stem to Housing using provided Locknut (Canopy Kit)
4. Feed the wires thru the Stem into the Housing
5. Attach Stem to Cross Bar, then attach the assembly to J-box
6. Make electrical connections in the Housing (see page 4)
7. Push the Canopy up against the ceiling and secure with set screw
8. Re-install Stencil

WIRING DIAGRAM

