

Project: _____

Type: _____

Model: _____

Date: _____



■ about

The **NYC LC1** is a New York compliant LED Exit sign with 8" red lettering in an architectural die-cast aluminum housing. It provides a thin-profile, lightweight alternative to the traditional die-cast exits. The strength of die-cast aluminum with the low-profile look, makes it ideal for today's contemporary applications.


■ internal

Self-powered or AC only: comes standard configured with dual 120/277V input. Nickel-Cadmium battery provides a minimum 90 minutes of emergency egress. The **NYC LC1** features a solid state charger and transfer switch with standard fuse protection.

■ external

The **NYC LC1** is designed to provide a durable, attractive and maintenance-free exit sign. The **NYC LC1** housing is manufactured from premium-grade, die-cast aluminum and is available in a brushed aluminum finish as well as white and black powder coat paint finishes. A universal aluminum mounting canopy is included for ceiling and end mount applications. The **NYC LC1** is configured with high-output LED technology, available in red only. The **NYC LC1** is UL listed for damp locations.

■ dimensions

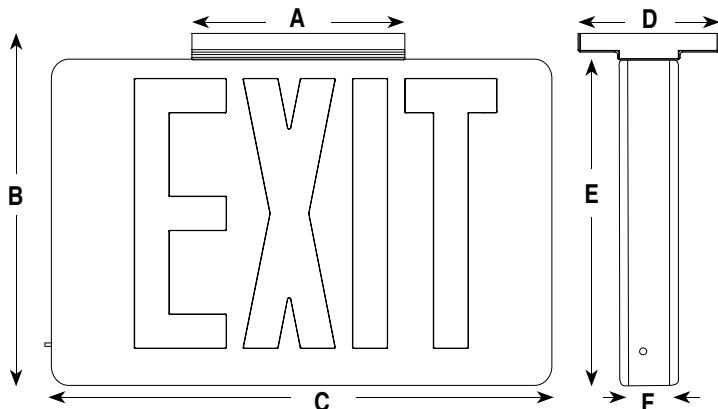

Series	A	B	C	D	E	F
NYC LC1	6 ^{11/16} " 170 mm	11 ^{1/4} " 286 mm	15 ^{1/2} " 394 mm	4 ^{3/8} " 111 mm	10 ^{3/8} " 264 mm	2 ^{1/16} " 52 mm

■ Weight: 7 lbs

■ ordering information

EXAMPLE: NYC LC1 HT LR1 BLK AL

Series	Operation	Letter Color	Faces	Face Color	Housing	Options
NYC LC1	HT (AC only)	LR ¹ (red)	1 (single)	AL (aluminum)	AL (aluminum)	AT ² (autotest)
	SA (self-powered)		2 (double)	BLK (black)	BLK (black)	
			U (universal)	WHT (white)	WHT (white)	

NOTE 1: New York approved 8" lettering.

NOTE 2: Available only with SA units.

electrical

BATTERY: The **NYC LC1 SA** is designed with a maintenance free, Nickel-Cadmium (Ni-Cad) 4.8V battery providing a minimum emergency duration of 90 minutes. Recharge time is twenty-four (24) hours.

CIRCUIT: The **NYC LC1** is configured with high-output LED lamps and is powered by a standard 120/277VAC input. Low voltage disconnect and brownout protection are standard. The fixture's operating temperature range is 32°F to 122°F (0°C to 50°C).

mechanical

The **NYC LC1** is constructed from durable die-cast aluminum. Universal mounting pattern and key hole slots are stamped on the back. A surface mount 3/4" conduit entry knockout is also provided through the back of the fixture. Field selectable knockout directional chevron arrows are standard. The **NYC LC1** is supplied standard with a brushed aluminum face(s) and a black coated housing held securely in place with no visible screws, nuts or fasteners for a clean look.

die-cast design

The excellent visual performance and architecturally pleasing design make the **NYC LC1** the premier choice for applications requiring the durability and the draftsmanship of die-cast aluminum exit signs. The standard brushed aluminum face blends well with any setting and provides a clean, contemporary look. The die-cast aluminum construction provides the **NYC LC1** with exceptional rigidity and strength.

self-powered

The **NYC LC1** is designed to operate on battery power in the event of a regular/mains power failure. Both the battery and charger are completely contained within the standard enclosure. There are no external components and no alterations made to the external dimensions of the standard sign.

autotest

The **NYC LC1** has an option to be supplied with the Beghelli Autotest diagnostic system. This system provides continuous monitoring of the unit's main components (battery, charger, transformer, & LEDs) and instant visual verification of the status.

AUTO-TEST FEATURES:

- Monitors battery disconnection, charger failure, LED failure and transformer fault every 5 seconds without discharging the battery.
- Automatically indicates LED, battery and charger status by dual-color LED lamp.
- Factory preset Autotest does not need to be field adjusted or reset for proper operation.

AUTO-TEST FUNCTIONS:

- Verifies battery disconnect, charger board failure, LED failure and transformer failure every 5 seconds.
- Performs a one (1) minute Autotest every month.
- Performs a thirty (30) minute Autotest every six (6) months.
- Performs a ninety (90) minute Autotest every twelve (12) months.

warranty

The **NYC LC1** comes with a 5-year factory warranty. Battery is prorated for five years. Deliberate damage, misuse, improper installation effectively cancel the warranty. Find complete warranty details on-line at beghelliusa.com.