



IES INDOOR REPORT

PHOTOMETRIC FILENAME : BS830LEDHTLOWT3022ACT120-277V_P.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TESTLAB] Photopia 2018.0.0 see: www.ltioptics.com/ies
 [ISSUEDATE]
 [TESTDATE] Wed Jul 18 16:19:44 2018
 [TEST] 1
 [MANUFAC]
 [LUMCAT]
 [LUMINAIRE] BS830LEDLOWT3022ACT120-277[_P
 [LAMP] LED 0.195W White 5630 package (65mA)
 [LAMPCAT] SPMWHT541MD-3900K
 IESNA:LM-63-2002
 [TEST] 6,552
 [TESTLAB] CSA Group
 [ISSUEDATE] 7/24/2013 1:09:24 PM
 [MANUFAC] Beghelli
 [OTHER] Luminous shape: Rectangle
 [OTHER] Luminous dimensions (feet)
 [OTHER] 0 - 180 Axis: 4.2
 [OTHER] 90 - 270 Axis: 0.6
 [OTHER] Height: 0.1

CHARACTERISTICS

| | |
|---------------------------------|---------------------|
| Lumens Per Lamp | N.A. (absolute) |
| Total Lamp Lumens | N.A. (absolute) |
| Luminaire Lumens | 12881 |
| Total Luminaire Efficiency | N.A. |
| Luminaire Efficacy Rating (LER) | 123 |
| Total Luminaire Watts | 105 |
| Ballast Factor | 1.00 |
| CIE Type | Direct |
| Spacing Criterion (0-180) | 1.14 |
| Spacing Criterion (90-270) | 1.14 |
| Spacing Criterion (Diagonal) | 1.26 |
| Basic Luminous Shape | Rectangular w/Sides |
| Luminous Length (0-180) | 1.88 ft |
| Luminous Width (90-270) | 1.88 ft |
| Luminous Height | 1.59 ft |

IES INDOOR REPORT
PHOTOMETRIC FILENAME : BS830LEDHTLOWT3022ACT120-277V_P.IES

LUMINANCE DATA (cd/sq.m)

| Angle In Degrees | Average 0-Deg | Average 45-Deg | Average 90-Deg |
|---------------------|------------------|-------------------|-------------------|
| 45 | 7452 | 6262 | 7452 |
| 55 | 4601 | 3750 | 4601 |
| 65 | 2546 | 2009 | 2546 |
| 75 | 1485 | 1130 | 1485 |
| 85 | 344 | 250 | 344 |

CANDELA TABULATION

| | 0 |
|------------|----------|
| 0 | 5948.225 |
| 5 | 5870.869 |
| 10 | 5817.285 |
| 15 | 5681.231 |
| 20 | 5390.943 |
| 25 | 4935.537 |
| 30 | 4491.917 |
| 35 | 4038.821 |
| 40 | 3624.969 |
| 45 | 3181.769 |
| 50 | 2578.195 |
| 55 | 1906.372 |
| 60 | 1316.179 |
| 65 | 990.788 |
| 70 | 754.874 |
| 75 | 523.043 |
| 80 | 286.692 |
| 85 | 104.647 |
| 90 | 27.350 |
| 95 | 10.340 |
| 100 | 8.660 |
| 105 | 9.442 |
| 110 | 7.577 |
| 115 | 8.778 |
| 120 | 12.928 |
| 125 | 15.691 |
| 130 | 16.867 |
| 135 | 15.162 |
| 140 | 12.029 |
| 145 | 11.021 |
| 150 | 10.567 |
| 155 | 10.357 |
| 160 | 10.618 |
| 165 | 11.474 |
| 170 | 13.440 |
| 175 | 13.297 |
| 180 | 17.875 |

IES INDOOR REPORT
PHOTOMETRIC FILENAME : BS830LEDHTLOWT3022ACT120-277V_P.IES

ZONAL LUMEN SUMMARY

| Zone | Lumens | %Lamp | %Fixt |
|---------|----------|-------|--------|
| 0-20 | 2154.00 | N.A. | 16.70 |
| 0-30 | 4430.11 | N.A. | 34.40 |
| 0-40 | 6964.97 | N.A. | 54.10 |
| 0-60 | 11109.15 | N.A. | 86.20 |
| 0-80 | 12662.68 | N.A. | 98.30 |
| 0-90 | 12805.16 | N.A. | 99.40 |
| 10-90 | 12245.75 | N.A. | 95.10 |
| 20-40 | 4810.97 | N.A. | 37.30 |
| 20-50 | 7235.17 | N.A. | 56.20 |
| 40-70 | 5147.03 | N.A. | 40.00 |
| 60-80 | 1553.53 | N.A. | 12.10 |
| 70-80 | 550.69 | N.A. | 4.30 |
| 80-90 | 142.48 | N.A. | 1.10 |
| 90-110 | 24.77 | N.A. | 0.20 |
| 90-120 | 34.19 | N.A. | 0.30 |
| 90-130 | 47.89 | N.A. | 0.40 |
| 90-150 | 66.42 | N.A. | 0.50 |
| 90-180 | 75.89 | N.A. | 0.60 |
| 110-180 | 51.12 | N.A. | 0.40 |
| 0-180 | 12881.06 | N.A. | 100.00 |

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

| Zone | Lumens |
|---------|---------|
| 0-10 | 559.42 |
| 10-20 | 1594.59 |
| 20-30 | 2276.11 |
| 30-40 | 2534.86 |
| 40-50 | 2424.21 |
| 50-60 | 1719.98 |
| 60-70 | 1002.84 |
| 70-80 | 550.69 |
| 80-90 | 142.48 |
| 90-100 | 15.48 |
| 100-110 | 9.29 |
| 110-120 | 9.42 |
| 120-130 | 13.69 |
| 130-140 | 11.51 |
| 140-150 | 7.02 |
| 150-160 | 4.85 |
| 160-170 | 3.30 |
| 170-180 | 1.33 |


IES INDOOR REPORT
PHOTOMETRIC FILENAME : BS830LEDHTLOWT3022ACT120-277V_P.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

| RC | 80 | | | | 70 | | | | 50 | | | 30 | | | 10 | | | 0 |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 99 |
| 1 | 110 | 106 | 102 | 99 | 107 | 103 | 100 | 97 | 99 | 96 | 94 | 95 | 93 | 91 | 92 | 90 | 88 | 86 |
| 2 | 101 | 94 | 88 | 83 | 99 | 92 | 86 | 82 | 88 | 84 | 80 | 85 | 81 | 78 | 82 | 79 | 76 | 74 |
| 3 | 93 | 84 | 76 | 70 | 91 | 82 | 75 | 70 | 79 | 73 | 68 | 76 | 71 | 67 | 74 | 70 | 66 | 64 |
| 4 | 86 | 75 | 67 | 61 | 84 | 74 | 66 | 60 | 71 | 65 | 59 | 69 | 63 | 59 | 67 | 62 | 58 | 56 |
| 5 | 79 | 68 | 59 | 53 | 77 | 66 | 59 | 53 | 64 | 58 | 52 | 62 | 56 | 52 | 61 | 55 | 51 | 49 |
| 6 | 74 | 61 | 53 | 47 | 72 | 60 | 53 | 47 | 59 | 52 | 46 | 57 | 51 | 46 | 55 | 50 | 46 | 44 |
| 7 | 69 | 56 | 48 | 42 | 67 | 55 | 47 | 42 | 54 | 47 | 42 | 52 | 46 | 41 | 51 | 45 | 41 | 39 |
| 8 | 64 | 51 | 43 | 38 | 63 | 51 | 43 | 38 | 49 | 42 | 38 | 48 | 42 | 37 | 47 | 41 | 37 | 35 |
| 9 | 60 | 47 | 40 | 34 | 59 | 47 | 39 | 34 | 46 | 39 | 34 | 45 | 38 | 34 | 44 | 38 | 34 | 32 |
| 10 | 56 | 44 | 36 | 31 | 55 | 43 | 36 | 31 | 42 | 36 | 31 | 41 | 35 | 31 | 41 | 35 | 31 | 29 |

POLAR GRAPH

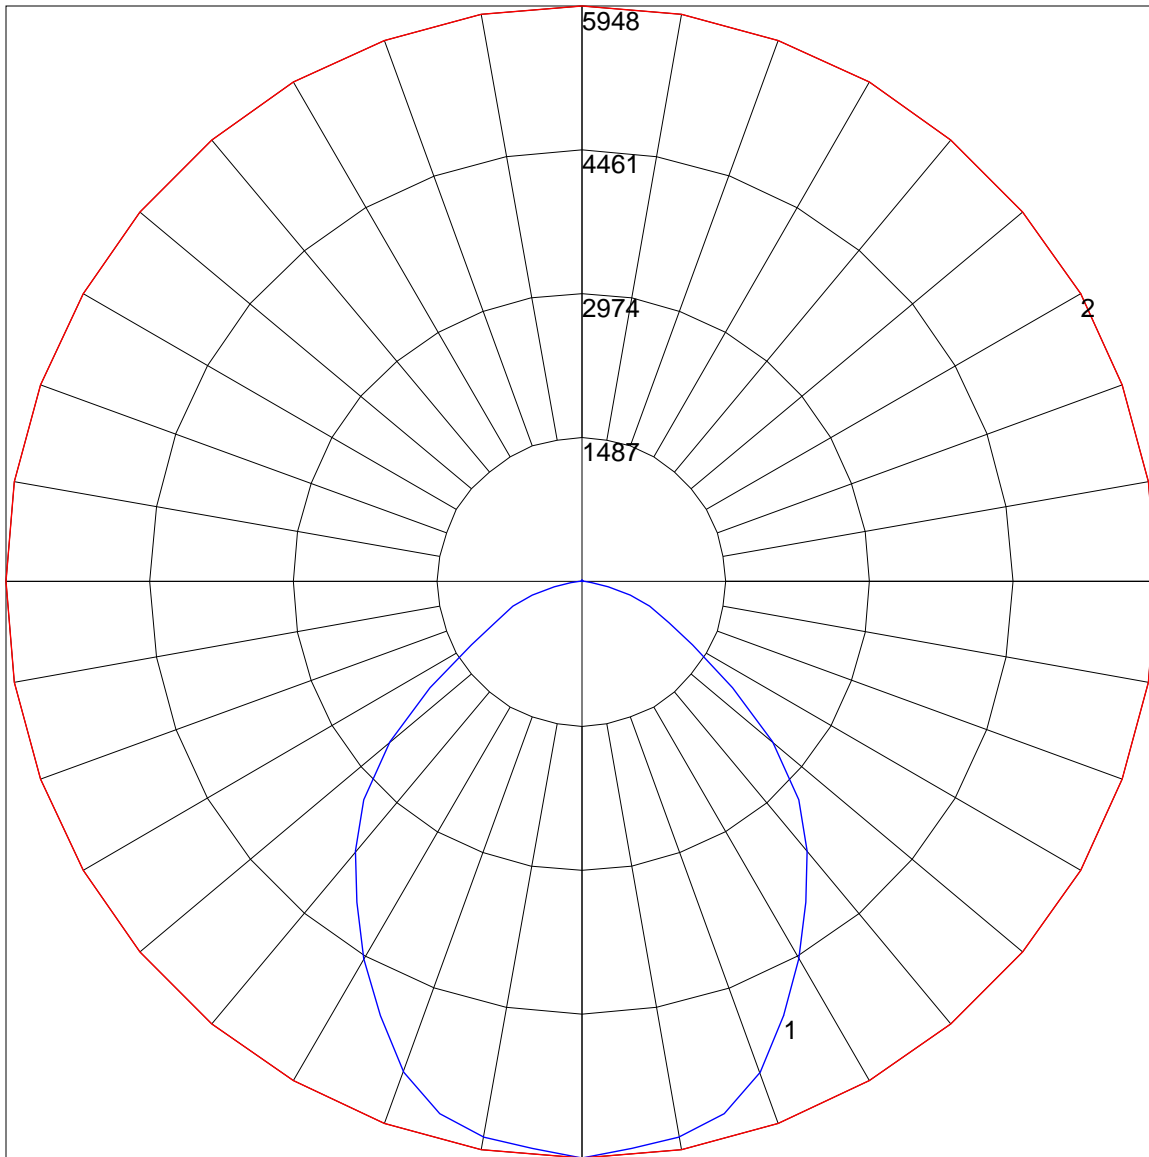

Maximum Candela = 5948.225 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (0)