

Job/Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_ Job Type: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_




### ■ specifications: internal

C-STX comes standard with ultra-bright, energy efficient, white LEDs that provide uniform illumination, 120/277V input. SA version comes with a NiCd battery that provides 120 minutes of emergency power. Fuse protection is standard.

### ■ specifications: external

Durable 20 gauge steel housing with tempered glass face plates. The directional arrows are silk screened and must be specified. Housing is finished in a white powder coat. Steel canopy allows for universal mounting configurations.

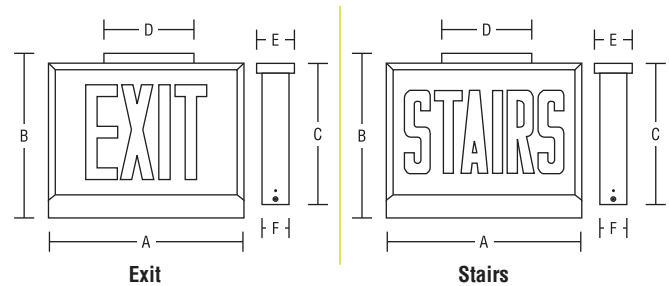

Series	A	B	C	D	E	F
C-STX EXIT	12.38"	11.25"	10.38"	6.88"	4.25"	2.38"
	305mm	279mm	254mm	152mm	102mm	51mm
C-STX STAIRS	13.38"	11.25"	10.38"	6.88"	4.25"	2.38"
	330mm	279mm	254mm	152mm	102mm	51mm

### ■ ordering logic

Series	Battery	Letter Color	Face No.	Housing	Configuration	Arrows
C-STX	HT (AC only)	LR (red)	1 (single)	W (white)	Blank (EXIT)	NA (no arrow)
	SA (self-powered)		2 (double)	B (black finish)	Stairs (STAIRS)	DA (double arrow)
						RA <sup>1</sup> (right arrow)
						LA <sup>1</sup> (left arrow)
						LARA <sup>2</sup> (left/right arrow)

[1]NOTE: Available in single face only.  
 [2]NOTE: Available in double face only.

EXAMPLE: C-STX-SA-LR2-W-NA  
 DESCRIPTION: AC & EM operation, red LED, double face, white housing, no arrow.

## ■ specifications: electrical

**BATTERY:** The **C-STX SA** version uses a maintenance free, sealed NiCd battery providing a minimum emergency duration of 120 minutes. Recharge time of the battery is twenty-four (24) hours. Rated to operate at 0°-50°C.

**CIRCUIT:** The **C-STX SA** version has an internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## ■ specifications: mechanical

The **C-STX** provides a clean and attractive solution. The durable 20 gauge housing is finished in a white powder coat. The mounting canopy is color matched and allows for ceiling or end mount. Universal knockouts provided on backplate for wall mount. The tempered glass face plate(s) illuminate evenly. Meets city of Chicago requirements. Please specify number of faces and arrow configurations.

## ■ warranty

The **C-STX** comes with a 5-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.