

Job/Location: _____	Job Type: _____
Contractor: _____	Date: _____
Prepared By: _____	



■ specifications: internal

The **DECO LED** is configured with dual voltage 120/277V input. The **DECO LED** comes standard with a chrome-plated metalized reflector and plastic lens for optimal light distribution.

■ specifications: external

The **DECO LED** is constructed from injection-molded, high impact and 5VA flame resistant thermoplastic. The **DECO LED** comes standard configured with two high performance, fixed, 2W LED heads.

The **DECO LED** has a universal mounting plate that allows for easy installation. White finish is standard (black color optional). External test switch and monitor LED are standard.

■ specifications: mechanical


The **DECO LED** features a unique all inclusive LED reflector and lens assembly. The **DECO LED** is suitable for wall or ceiling mount. Surface mount back plate fits most standard size junction boxes and snaps into place, allowing for easy installation. Universal mounting adapter plate included with mounting hardware.

■ ordering logic

Series	Model	Options
DECO	LED	B (black)

EXAMPLE: DECO LED
DESCRIPTION: DECO LED, 2x2W, white finish, damp location.

■ dimensions (in, mm.)

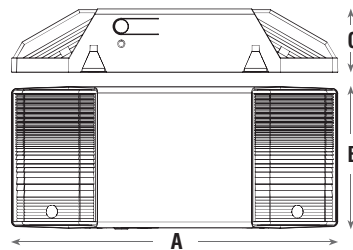

Series	A	B	C
DECO LED	11.18" 283mm	5.12" 130mm	2.37" 60mm

■ specifications: battery

The **DECO LED** is supplied with a maintenance free, 3.6V nickel cadmium (NiCd) battery that provides a minimum emergency duration of 90 minutes. The charge time of the battery is twenty-four [24] hours. The operating temperature is from -40F up to 32°F (-40°C up to 0°C).

■ warranty

The **DECO LED** comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.