

Job/Location: _____	Job Type: _____
Contractor: _____	Date: _____
Prepared By: _____	



■ specifications: internal

The **DECO** is configured with a 120/277V input with solid state charging circuitry. Standard features include low voltage disconnect, AC lockout and brownout protection.


■ specifications: external

The universal mounting plate allows for easy installation. The **DECO** comes complete with two wedge based 5W lamps. Damp location rating is standard. External test switch and monitor LED are standard.

■ specifications: mechanical

The **DECO** utilizes a corrosion and flame resistant (UL-94V-0), injection molded thermoplastic housing. The **DECO** is lightweight and durable and uses a universal mounting bracket that snaps into the housing. The bracket connection allows installation to a standard surface mounted junction box. Easy field wiring and durability make the **DECO** a favorite among contractors.

■ dimensions (in,mm.)

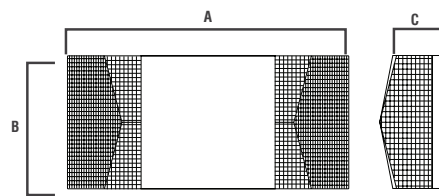

Series	A	B	C
DECO	11 ⁴ / ₅ " (300mm)	5" (127mm)	2 ¹¹ / ₁₆ " (68mm)

■ specifications: electrical

BATTERY: The **DECO** is supplied with a maintenance free, 6V 4.5Ah sealed lead calcium battery that provides a minimum emergency duration of 90 minutes. The charge time of the battery is twenty-four [24] hours. The operating temperature is from 68°F up to 122°F (20°C up to 50°C).

■ warranty

The **DECO** comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.

■ ordering logic

Series	Model	Options
DECO	6	B (black)

EXAMPLE: DECO-6
 DESCRIPTION: emergency only, 6V 2-5W lamps, damp location