

PACO-T20 REMOTES

INDOOR | DAMP | WET



Indoor Architectural Emergency

Job/Location: _____
 Contractor: _____
 Prepared By: _____

Job Type: _____
 Date: _____



PS-1



PS-2


■ PACO-T20 high output led remote heads

The PACO-T20, fully adjustable square remote heads utilizes high output LED technology. For use as part of an emergency lighting system, providing light for path of egress.

■ specifications: electrical

For remote single heads, maximum wattage is 2.3W. For remote double heads, maximum wattage per head is 1.15W. Powered from low voltage power source (3.6V batteries). Low voltage wiring not provided. The operating temperature is from 68°F up to 86°F (20°C up to 30°C).

■ dimensions (in,mm.)

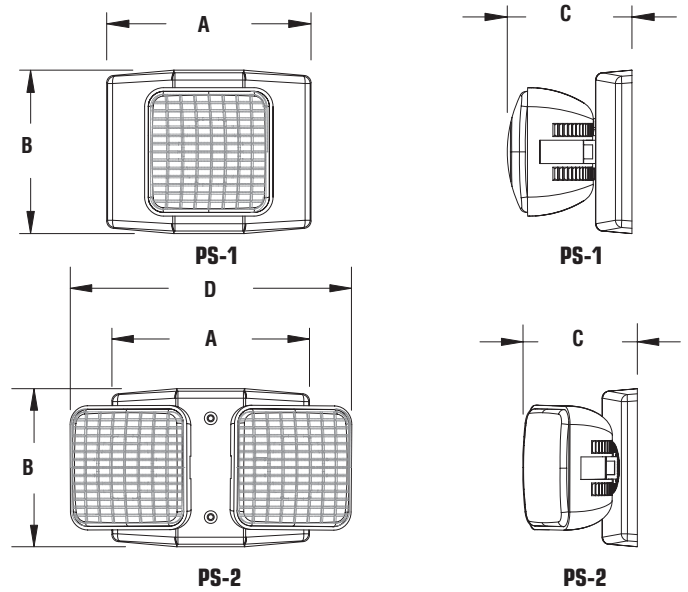

Series	A	B	C	D
PS-1	5.5" 139mm	4.4" 111mm	3.2" 81mm	N/A
PS-2	5.5" 139mm	4.4" 111mm	3.4" 86mm	7.8" 198mm

■ ordering logic

Series	Head #
PS	1 (single head)
	2 (double head)

EXAMPLE: PS-1
 DESCRIPTION: Single remote head, 3.6V, 2.3W.



6/17/22

www.beghelliusa.com