

PLURALUCE® SQUARE RECESSED REMOTE

INDOOR



Indoor Architectural Emergency

Job/Location: _____	Job Type: _____
Contractor: _____	Date: _____
Prepared By: _____	



■ specifications: external

The compact, recessed design of the **PLURALUCE® SQUARE RECESSED REMOTE** has a modern look that blends seamlessly in today's retail and commercial environments. The steel trim comes standard in a white powder coat with optional painted finishes.

■ specifications: internal

The **PLURALUCE® SQUARE RECESSED REMOTE** is configured 12-24V 10W LED.

■ LED technology

The **PLURALUCE® SQUARE RECESSED REMOTE** is illuminated with four 2.5W Samsung LEDs. Under any operation, the **PLURALUCE® SQUARE RECESSED REMOTE** delivers between 826 lm - 845 lm. Each pair of LEDs are laid out in parallel on the LED module so if one pair fails, the other will remain illuminated. A high-efficiency LED driver is used to maintain a constant output current to all LEDs. The LEDs are rated for >54,000 hours at L80.

■ installation

The **PLURALUCE® SQUARE RECESSED REMOTE** is designed for recessed mount. The **PLURALUCE® SQUARE RECESSED REMOTE** is suitable for use in non-IC installations only.

■ ordering logic


Series	Options
PL-SQR-RMT	CC (custom color - specify)

NOTE 1: Unswitchable.

EXAMPLE: PL-SQR-RMT-CC

DESCRIPTION: PLURALUCE SQUARE RECESSED REMOTE, custom color.

■ dimensions (in, mm.)

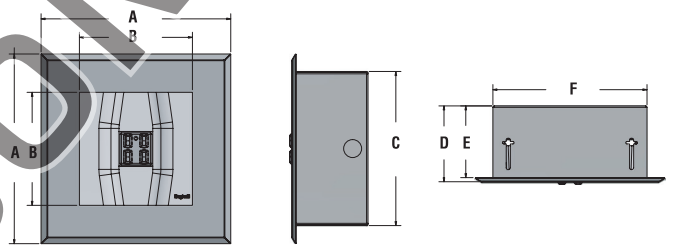

Series	A	B	C	D	E	7.5" 191mm
PL-SQR-RMT	9.25" 235mm	5.5" 140mm	7.5" 191mm	3.75" 95mm	3.5" 127mm	

■ FCC

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CSA 22.2 No. 141 performance certified.