

Job/Location: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_

Job Type: \_\_\_\_\_  
 Date: \_\_\_\_\_




## ■ specifications: internal

AC only: 120/277V input. Self-Powered: 120/277V input. The **PACO PX** self powered version uses a rechargeable, maintenance free 3.6V 900mAH nickel cadmium battery. The circuit board features an onboard solid state transformer, low voltage disconnect and brownout protection. Red or green LEDs totaling less than 2W.

## ■ specifications: external

The **PACO PX** features performance and reliability in a compact, attractive and low profile package. It is constructed from high impact, injection molded thermoplastic. The **PACO PX** comes standard in white, black is optional. Field adjustable chevrons are standard. The **PACO PX** can be universally mounted single or double face (extra faceplate included). The SA version includes an integrated test switch /monitor LED, which gives immediate unit status. Damp location rated.

## ■ dimensions (in,mm.)

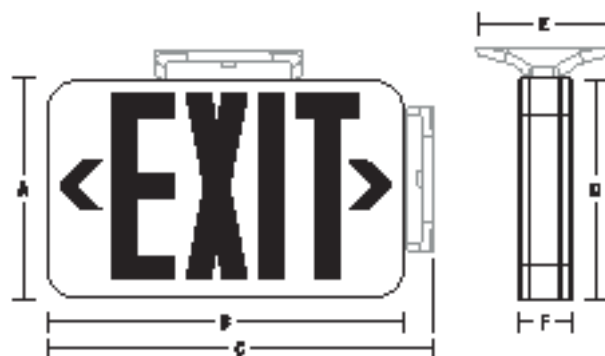

Series	A	B	C	D	E	F
PX	7.2"	11.6"	12.6"	8.2"	4.3"	2"
	183mm	295mm	320mm	209mm	109mm	51mm

## ■ ordering logic

Series	LED	Operation	Options
PX	R (red)	HT (AC Only)	AT (autotest)
	G (green)	SA (self-powered)	B (black housing)
			RC¹ (remote capable)

**NOTE 1:** Max load per unit: 3.4W for 90 minutes. SA model only.

EXAMPLE: PX-R-SA-B

DESCRIPTION: self powered, Red LED , black housing, damp location.

## ■ emergency heads

**PACO** is remote capable of operating 2, single head remotes or 1 double head remote. Max load per unit: 3.4W. Remote heads are available.

## ■ specifications: electrical

**BATTERY:** The **PACO PX** is designed with a 3.6V 900mAH maintenance free nickel cadmium battery that provides minimum emergency duration of 90 minutes. The recharge time of the battery is 24 hours. The battery operating temperature is from 50°F up to 104°F (10°C up to 40°C).

**CIRCUIT:** The **PACO PX** has a 120/277V solid state transformer. Low voltage disconnect and brownout protection are standard. Red or green LEDs totaling <2W.

## ■ specifications: mechanical

The **PACO PX** is designed for surface wall or ceiling installations. Suitable for indoor/ damp location environments. The thermoplastic housing comes in white as standard; optional black is available. The **PACO PX** is a universal exit available with or without battery back-up. The exit comes standard with mounting canopy and extra stencil face plate.

## ■ self-powered

The **PACO PX** self-powered is designed to operate on battery power in the event of regular / mains power failure. Both the battery and charger are completely contained within the standard sign. There are no external components and no alterations made to the external dimensions of the standard sign. Status is easily determined via an LED that indicates AC-ON. A push button test switch allows maintenance personnel to quickly confirm the operational status of the exit at any time.

## ■ warranty

The **PACO PX** comes with a 5-year factory warranty. Deliberate damage, misuse, improper installation effectively void the warranty. For complete warranty details see online.