

## VANDAL RESISTANT LINEAR LED

- The **SPADA®** is a vandal and impact resistant fixture.
- **HOUSING:** 1 single piece constructed of high quality extruded aluminum, allowing for excellent heat dissipation.
- **DIFFUSER:** Extruded UV stabilized polycarbonate lens providing reduced glare.
- **LUMENS:** **LO:** 4380 up to 4660 lm  
**HO:** 5477 up to 5826 lm
- **OPERATING TEMP:**  
HT (AC Only) -20°C up to 40°C (-4°F up to 104°F)
- **WEIGHT:** 7 lbs. / 3.2 kg.



**APPLICATION:** The **SPADA®** is ideal for manufacturing facilities, work stations, locker rooms, schools, breezeways, government facilities, prisons, public areas, offices, meeting rooms, hotels, hospitals, supermarkets, shopping malls, large retailers, libraries, schools, manufacture warehouses, parks, exhibition centers, gas stations, toll stations and gymnasiums.

### CONFIGURATIONS

MODEL	LENGTH	OPERATION	OUTPUT	COLOR TEMP	INPUT	MOUNTING	OPTIONS
SPA	4 (ft)	HT (AC only)	LO	WT30 (3000K)	120-277V	SM <sup>1</sup> (surface mount)	LOG-RLYL <sup>4</sup> (lighting control module relay)
			HO	WT40 (4000K)		AC <sup>2</sup> (aviation cable)	LOG-ESRPL <sup>4</sup> (single switch)
				WT50 (5000K)		CH <sup>3</sup> (chain hang kit)	LOG-ML2L <sup>4</sup> (wireless, self powered, passive infrared motion and lux sensor)
						DPK <sup>3</sup> (double pendant kit)	
						SVLDPK <sup>3</sup> (swivel double pendant kit)	


NOTE 1: Surface mount is standard.

NOTE 2: Specify length for AC: 50", 72", 100", 150", 250" fully adjustable.


NOTE 3: DPK, CH & SVLDPK options must specify length.

NOTE 4: Logica (Beggelli wireless and powerless control solutions). Contact factory for more details.


### TECHNICAL INFORMATION

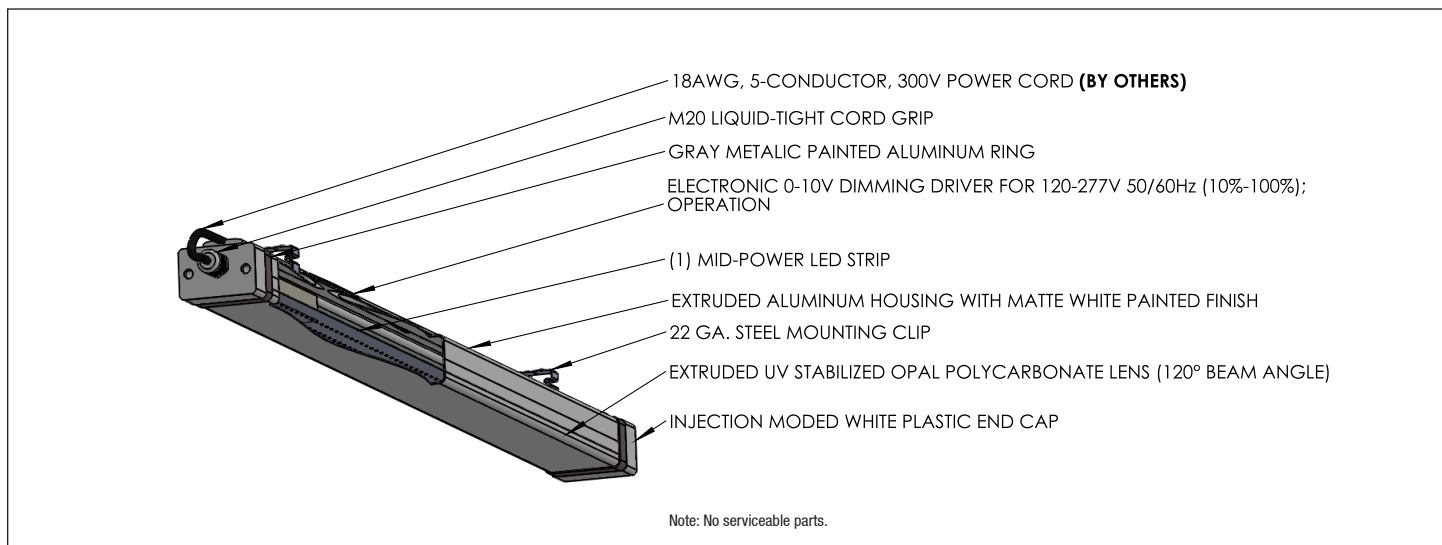


**DIMENSIONS**

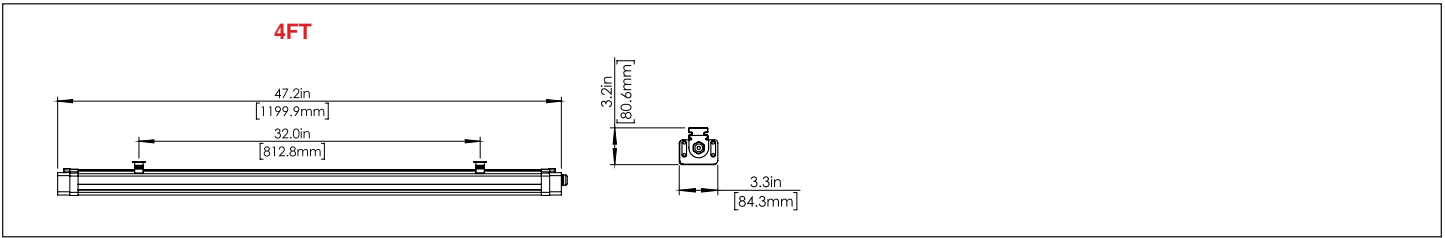

**MOUNTING OPTIONS**

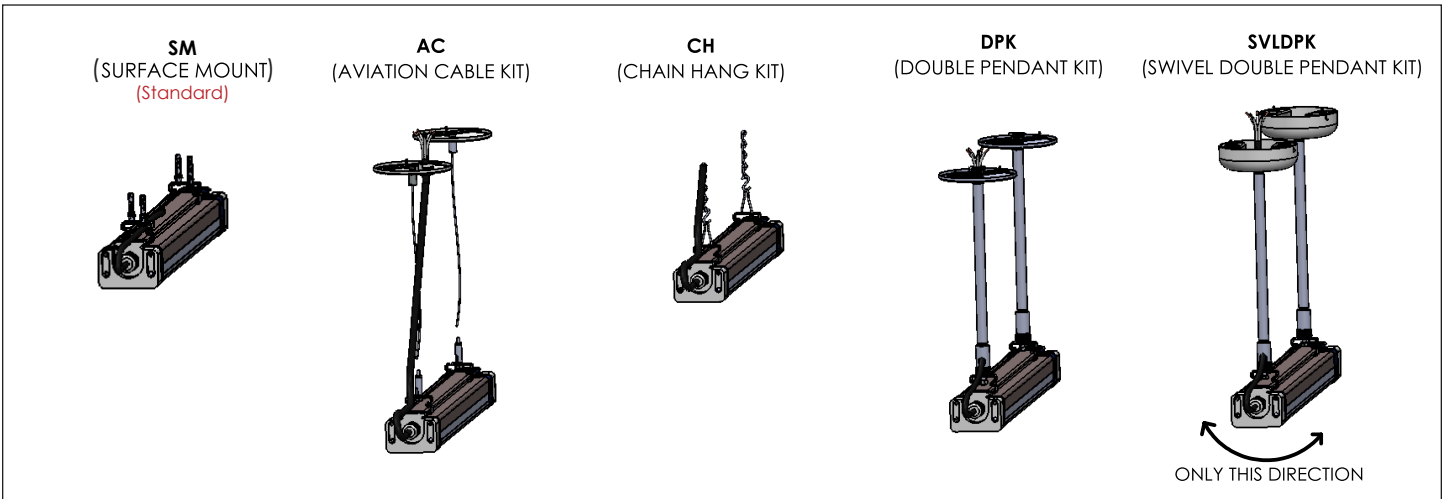

**PHOTOMETRICS**

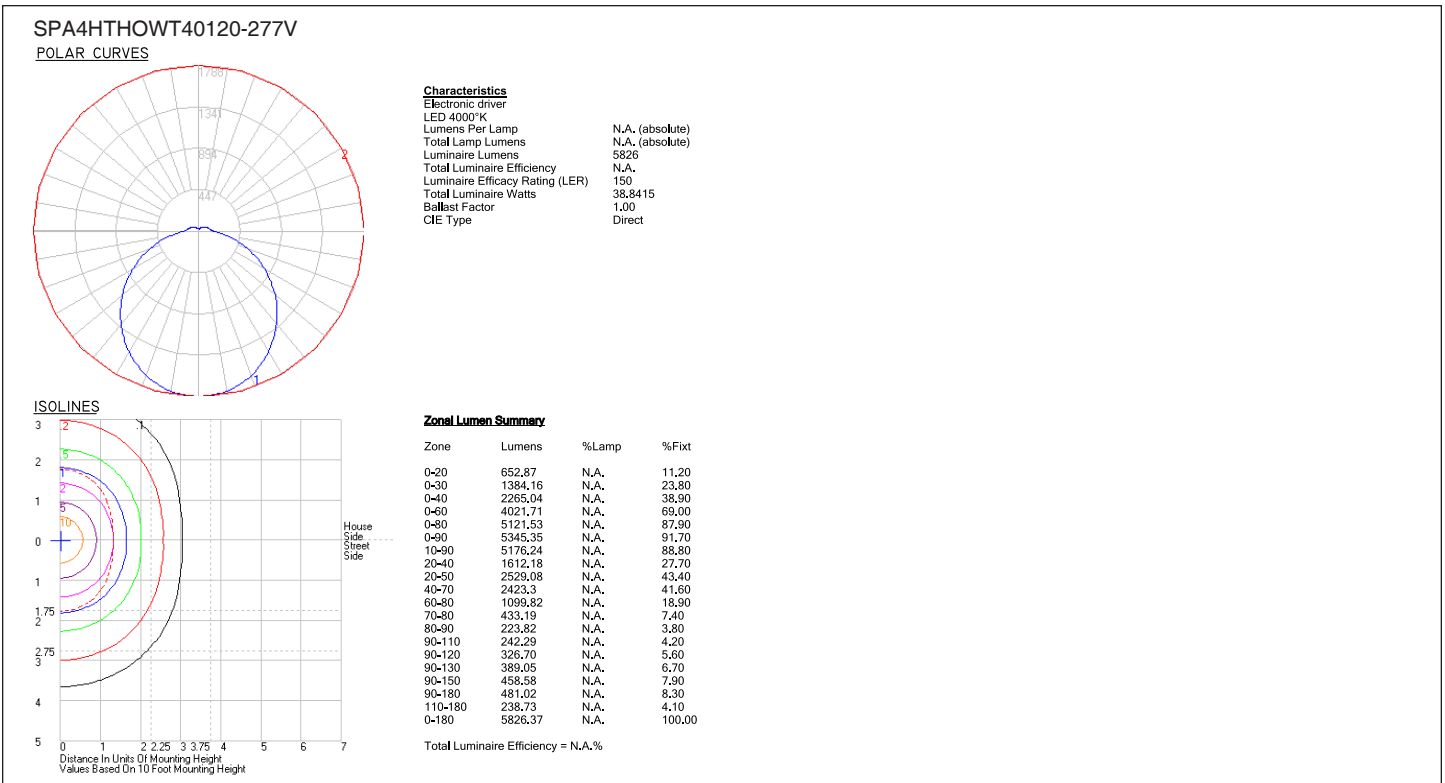

**ENERGY CHART**

MODEL	LENGTH	EFFICACY	CONSUMPTION WATTAGE	LUMEN OUTPUT	CRI	L70 (hrs.)	L84 (hrs.)
SPA4HTLOWT30-120-277V	4 ft	112 lm/W	40	4380	>80	>60,000	>52,000
SPA4HTLOWT30-120-277V	4 ft	119 lm/W	40	4660	>80	>60,000	>52,000
SPA4HTLOWT30-120-277V	4 ft	119 lm/W	40	4660	>80	>60,000	>52,000
SPA4HTHOWT30-120-277V	4 ft	141 lm/W	40	5477	>80	>60,000	>52,000
SPA4HTHOWT30-120-277V	4 ft	150 lm/W	40	5826	>80	>60,000	>52,000
SPA4HTHOWT30-120-277V	4 ft	150 lm/W	40	5826	>80	>60,000	>52,000

**ELECTRICAL RATING**

PRODUCT	NOMINAL POWER (W)	AC CURRENT (A) AC VOLTAGE		FREQUENCY (HZ)	DC VOLTAGE	DC CURRENT (MA)
		120V	277V			
SPA4HTLOWT40-120-277V	40	0.35	0.16	50/60	34.92	1050
SPA4HTHOWT40120277V	40	0.35	0.16	50/60	35.23	1050


**DIMMER COMPATIBILITY**

DIMMER	COMPATABILITY	
	ON / OFF	DIMMING
LEVITON - AWRMG - 7	YES	YES
LUTRON - DIVA - DVSTV	YES	YES
LUTRON - DIVE - DVTV	YES	YES
WATT STOPPER - DCLV1	YES	YES


**LOGICA (WIRELESS & POWERLESS LIGHTING CONTROL SOLUTIONS)**

**DAISY CHAIN FIXTURES (RLYL)**


**LOG-RLYL**  
WIRELESS RELAY  
(WET LOCATION)

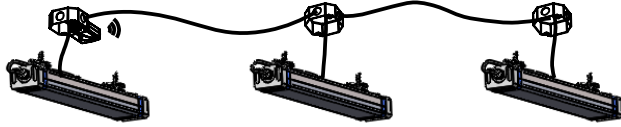

**LOG-ESRPL**  
SWITCH  
(ACCESSORY)  
(DAMP LOCATION)



**LOG-ML2L**  
REMOTE SENSOR  
(ACCESSORY)  
(DAMP LOCATION)



FIXTURES DAISY CHAIN ~ 48 FIXTURES; 94 FT. MAX. (base on 12AWG)  
(daisy chain by others)

■ **WARRANTY:** 5 year warranty, see website for full warranty details.