

STRIPLED

DAMP | IP44 | LINEAR 4FT & 8FT



LINEAR LED

- The **STRIPLED** is offered in three color temperatures 3500K, 4000K and 5000K.
- The **STRIPLED** is a linear LED solution ideal to replace the T8 and T5HO fluorescent units. LED PCB consists of 327 LEDs.
- **HOUSING:** 22 ga steel housing in white paint finish.
- **DIFFUSER:** Frosted UV stabilized polycarbonate diffuser, providing even light distribution.
- **LUMENS:** **LO:** 3332 up to 3384 lm
MO: 5270 up to 5398 lm
HO: 7851 up to 8092 lm
VHO: 8897 up to 9170 lm
- **OPERATING TEMP:**
HT (AC Only) -40°F to 104°F (-40°C to 40°C)
EM 32°F to 77°F (0°C to 25°C)
- **WEIGHT:** **LO & MO:** 6.2 lbs. / 2.81 kg.
HO & VHO: 12.1 lbs. / 5.48 kg.



APPLICATION: The **STRIPLED** is the ideal linear LED solution for budget conscious installations or replacement of linear fluorescent luminaires typically used in warehouses, aisle lighting, service corridors, offices, garages, retail and other commercial environments.

CONFIGURATIONS

MODEL	LENGTH	OPERATION	OUTPUT	COLOR TEMP	INPUT	MOUNTING	OPTIONS
SLLED	4 (ft)	HT (AC only)	LO ¹	WT35 (3500K)	120-277V	SM ³ (surface mount)	EM ⁶ (emergency backup-remote)
	8 (ft)		MO ¹	WT40 (4000K)		AC ⁴ (aviation cable)	WG (wireguard)
			HO ²	WT50 (5000K)		CH ⁵ (chain hang kit)	RLYL ⁷ (wireless relay - LOGICA)
			VHO ²				


NOTE 1: LO & MO available in 4ft only.
NOTE 2: HO & VHO is available in 8 ft only.
NOTE 3: Surface mount is standard.
NOTE 4: Specify length for AC: 50", 72", 100", 150", 250" fully adjustable.

NOTE 5: Specify length for CH: 12", 24", 36", 48", other specify.
NOTE 6: Field installation emergency pack; 120/277V; 10W, 1347 lumens.
NOTE 7: Logica (Beggelli wireless and powerless control solutions). Contact factory for more details.


TECHNICAL INFORMATION

- (1) ELECTRONIC 0-10V DIMMING DRIVER FOR 120-277V 50/60Hz (10-100%)
- (1) LED PCB consists of 327 LED for 4FT and 654 LED for 8FT
- 22 GA. STEEL HOUSING IN WHITE PAINT FINISH
- OPAQUE POLYCARBONATED DIFFUSER/ENCLOSURE, PROVIDING EVEN LIGHT DISTRIBUTION
- 22 GA. STEEL REFLECTOR IN WHITE POWDER COAT FINISH
- OPTIONAL**
- EM - FIELD INSTALLATION EMERGENCY PACK; 120/277V; 10W, 1347 lumens
- WG - WIRE GUARD


DIMENSIONS

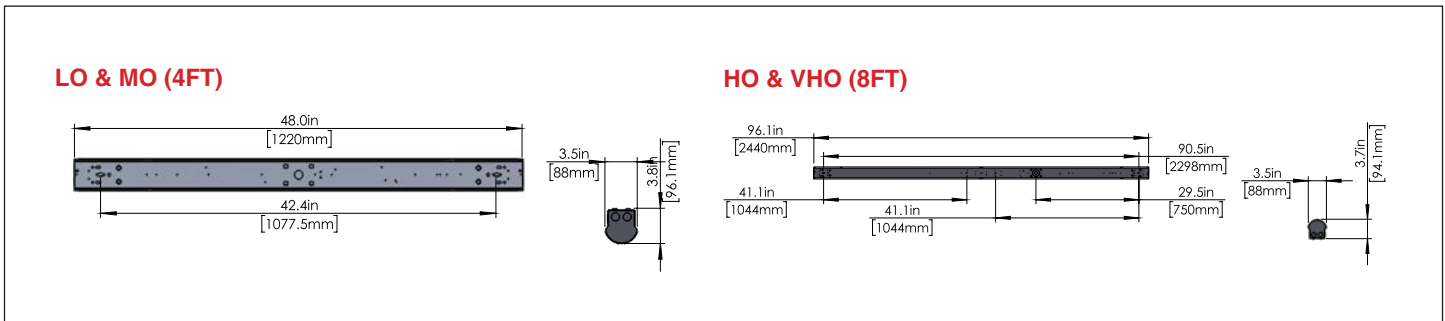

MOUNTING OPTIONS

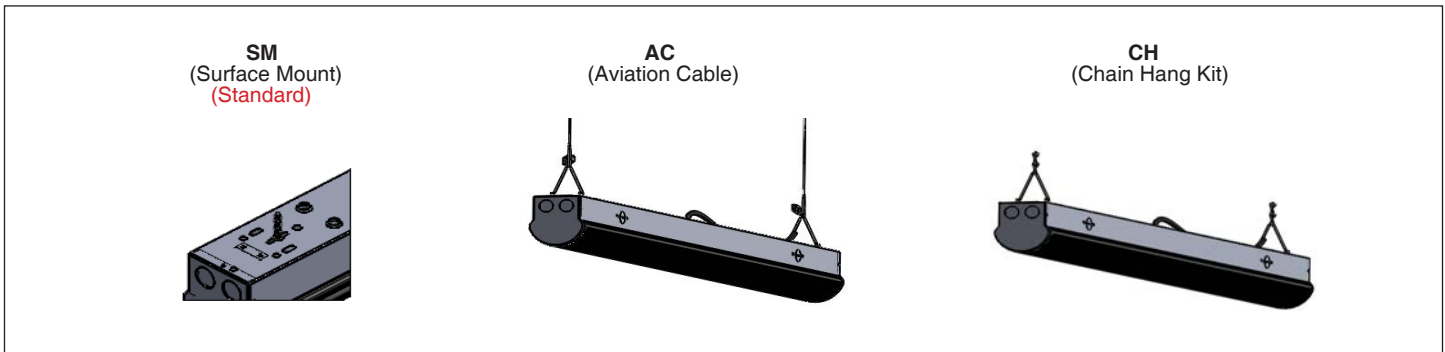

PHOTOMETRICS

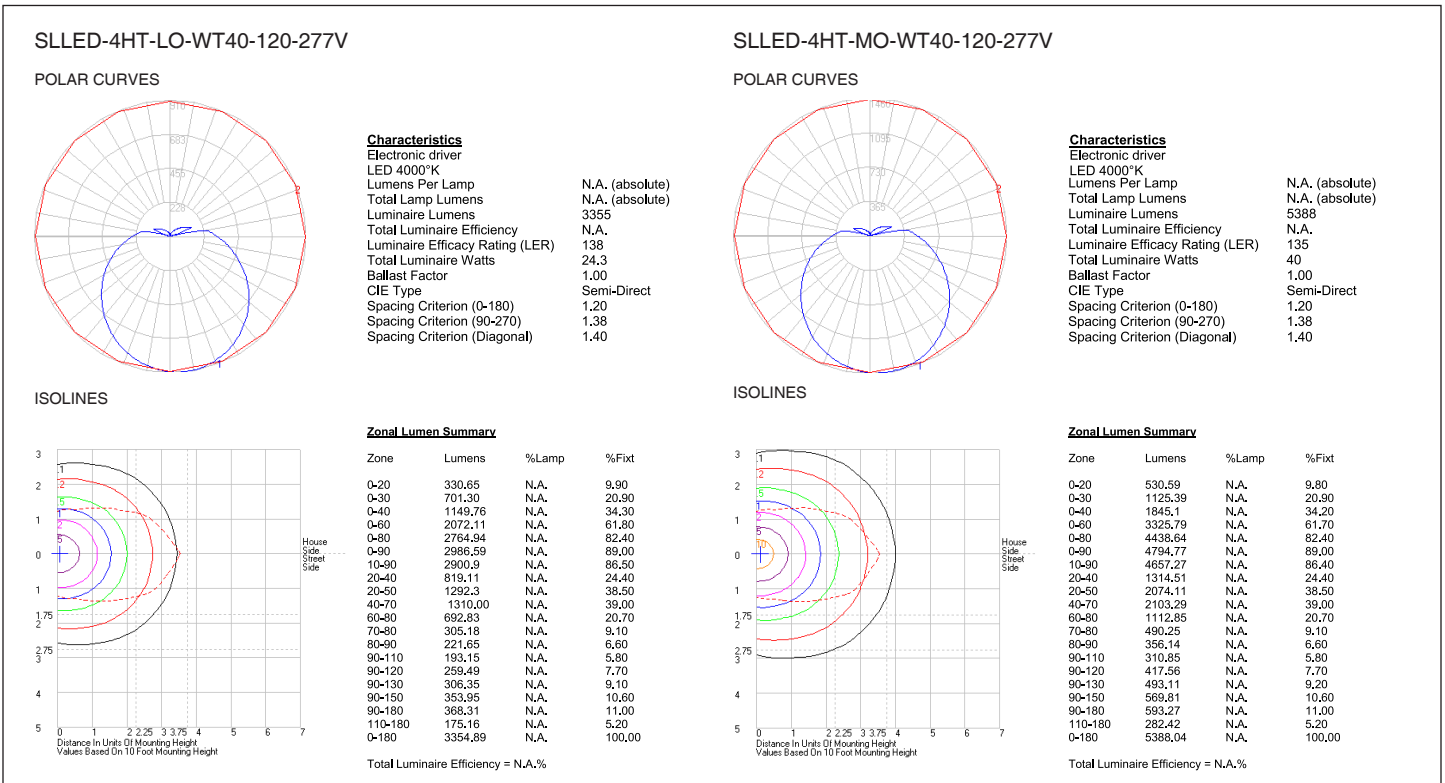

STRIPLED

ADDITIONAL INFORMATION

ENERGY CHART

MODEL	LENGTH	EFFICACY	CONSUMPTION WATTAGE	LUMEN OUTPUT	CRI	L70 (hrs.)
SLLED-4HT-LO-WT40-120-277V	4 ft	138 lm/W	24	3355	>80	>60,000
SLLED-4HT-MO-WT40-120-277V	4 ft	135 lm/W	40	5388	>80	>60,000
SLLED-8HT-HO-WT40-120-277V	8 ft	134 lm/W	60	8018	>80	>60,000
SLLED-8HT-VHO-WT40-120-277V	8 ft	134 lm/W	68	9087	>80	>60,000


ELECTRICAL RATING

PRODUCT	NOMINAL POWER (W)	AC CURRENT (A)		FREQUENCY (HZ)	DC VOLTAGE (V)	DC CURRENT (MA)
		AC VOLTAGE 120V	AC VOLTAGE 277V			
SLLED-4HT-LO	24	0.20	0.09	50/60	40	650
SLLED-4HT-MO	40	0.34	0.15	50/60	40	1000
SLLED-8HT-HO	60	0.51	0.22	50/60	42	1250
SLLED-8HT-VHO	68	0.58	0.25	50/60	38	2150

DIMMER COMPATIBILITY

DIMMER	COMPATIBILITY	
	ON / OFF	DIMMING
LEVITON - AWRMG-7	YES	YES
LUTRON - DIVE DVSTV	YES	YES
LUTRON - DIVE DVTV	YES	YES
WATT STOPPER DCLV1	YES	YES

LOGICA (WIRELESS & POWERLESS LIGHTING CONTROL SOLUTION)

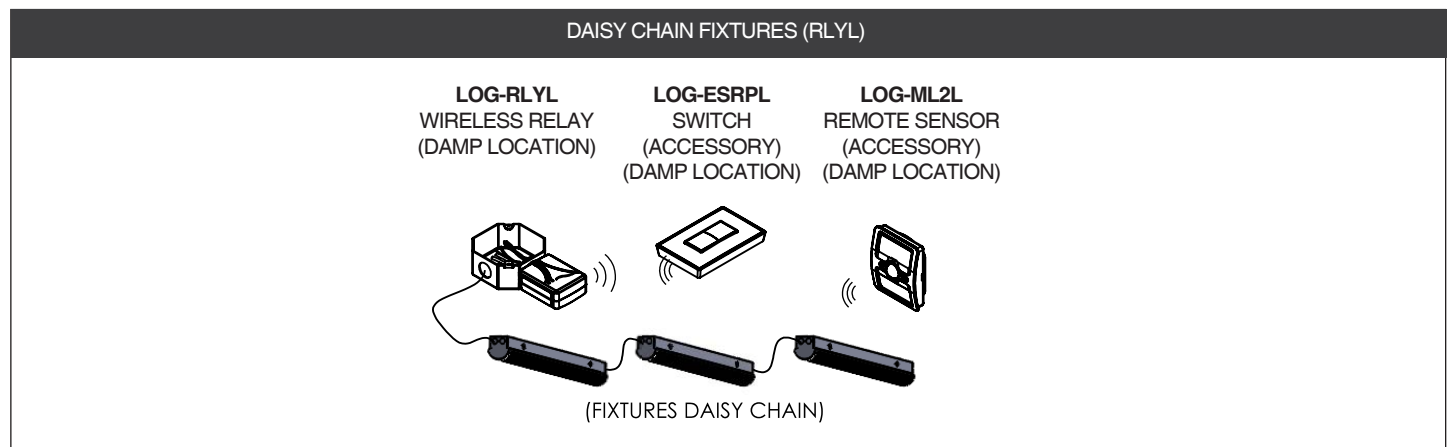

■ **WARRANTY:** 5 year warranty, see website for full warranty details.