

# BOLLA WP REMOTE

WET | INDOOR | VANDAL RESISTANT | NEMA 4X | SANITATION LISTED



Remotes

Job/Location: \_\_\_\_\_  
Contractor: \_\_\_\_\_  
Prepared By: \_\_\_\_\_

Job Type: \_\_\_\_\_  
Date: \_\_\_\_\_



## NEMA 4X design

The **BOLLA WP remote** has been designed to perform in applications where the environment would punish any standard remote. The entire internal cavity of the sign is protected from moisture ingress by an extremely resilient gasket.

## specifications: external

The **BOLLA WP remote** is designed to withstand the elements and abuse in applications such as schools, corridors, institutions and apartment complexes. The die-cast aluminum body and polycarbonate lens offer protection and superior performance. Tamper resistant screws are standard and ensure the integrity of the battery unit.

## specifications: electrical

The **BOLLA WP remote** series is available with high output LED, MR16 or GU10 lamps.

## specifications: mechanical

The **BOLLA WP remote** is constructed of powder coated die-cast aluminum mounting plate with an impact resistant polycarbonate protective lens. The **BOLLA WP remote** mounting plate is standard in an attractive powder coated silver grey finish. Other colors are available, including custom color matching.

## lamp selection

| Lamp     | 6V    | 12V         | 24V   | 120V |
|----------|-------|-------------|-------|------|
| MR16     | -     | 20, 35, 50W | -     | N/A  |
| MR16 LED | 5, 7W | 2, 5, 7W    | 5, 7W | N/A  |
| GU10     | N/A   | N/A         | N/A   | 20W  |

## ordering logic

| Series   | Lamp No.        | Voltage/Wattage    | Options                       |
|----------|-----------------|--------------------|-------------------------------|
| BOL-WP-R | 1 (single lamp) | See Lamp Selection | CC (custom color housing)     |
|          | 2 (double lamp) |                    | BPG9 <sup>1</sup> (wireguard) |

**NOTE 1:** Order as a separate line item (BPG9).


EXAMPLE: BOL-WP-R-2-12V5W-LED  
DESCRIPTION: Bolla NEMA 4X Remote, 2 lamp, 12V 5W LED

Beghelli

3/3/22

www.beghelliusa.com

## dimensions (in, mm.)

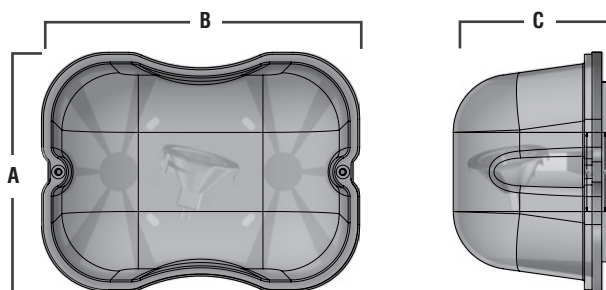

| Series   | A      | B      | C      |
|----------|--------|--------|--------|
| BOL-WP-R | 6 1/4" | 8 1/4" | 3 3/4" |
|          | 159mm  | 210mm  | 95mm   |

## installation

The **BOLLA WP remote** series remote is supplied with a universal mounting plate for surface ceiling or wall mount applications. Suitable for indoor, outdoor, damp or wet location applications with NEMA 4X protection. The operating temperature is -40°F to 113°F (-40°C to 45°C).

## sanitation listed (SL)

The **BOLLA WP remote** is sanitation approved. The Intertek verified splash zone listing is certified to the NSF Standard 2, meeting the rigorous sanitation, electrical safety and performance standards of food service environments.

## warranty

The **BOLLA WP remote** comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.