




# CASTEX comparison

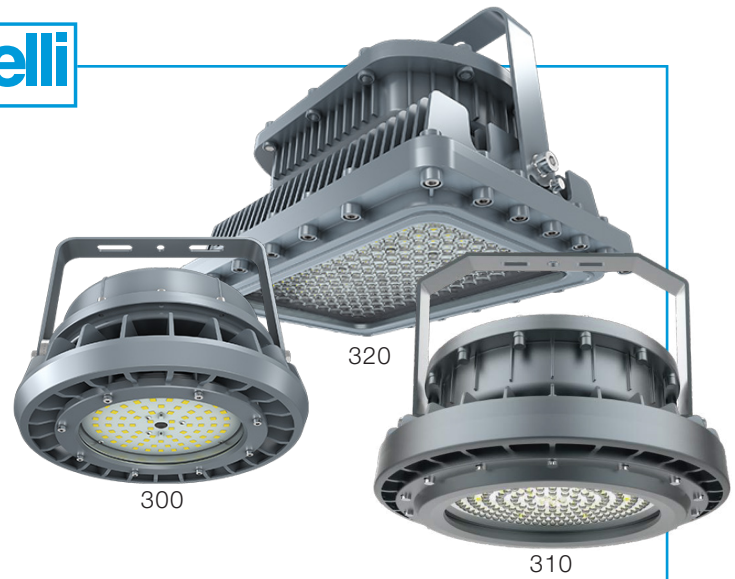

■ ■ ■ **CAS150, CAS300, CAS310, CAS320, CAS400, CAS510, CAS600**

CASTEX PORTFOLIO	CAS150	CAS300	CAS310	CAS320	CAS400	CAS510	CAS600
OPERATION	HT (AC Only)	HT (AC Only)	HT (AC Only)	HT (AC Only)	HT (AC Only)	HT (AC Only)	HT (AC Only)
<b>CLASSIFICATIONS</b>							
CLASS I DIVISION 1 GROUPS C & D	●		●	●			●
CLASS I DIVISION 2 GROUPS A,B,C,D	●	●	●	●	●	●	●
CLASS II DIVISION 1 GROUPS E,F,G	●	●	●	●	●	●	●
CLASS II DIVISION 2 GROUPS F & G	●	●	●	●	●	●	●
CLASS III	●	●	●	●	●	●	●
HOUSING	Die-cast copper-free aluminum	A383 aluminum alloy	A383 aluminum alloy	A383 aluminum alloy	Stainless steel	Die-cast copper-free aluminum	Die-cast copper-free aluminum
COLOR TEMP	5000K	5000K	5000K	5000K	5000K	5000K	5000K
DIFFUSER	N/A	4mm tempered glass	4mm tempered glass	4mm tempered glass	Polycarbonate	Polycarbonate	Polycarbonate with tempered glass cover
WATTAGE	30W, 40W	60W, 100W, 150W, 200W	60W, 80W, 100W, 150W, 250W	60W, 80W, 100W, 150W	30W, 50W	40W, 60W, 80W	50W, 60W, 80W, 100W,
LUMENS	4200 - 5600 lm	8400 - 28000 lm	8400 - 35000 lm	8400 - 21000 lm	4200 - 7000 lm	5600 - 12000 lm	7000 - 14000 lm
OPERATING TEMP	-40°F - 149°F (-40°C - 65°C)	-40°F - 131°F (-40°C - 55°C)	-40°F - 140°F (-40°C - 60°C)	-40°F - 131°F (-40°C - 55°C)	-40°F - 140°F (-40°C - 60°C)	-40°F - 140°F (-40°C - 60°C)	-40°F - 140°F (-40°C - 60°C)
MOUNTING	Surface Pendant	Surface Pendant Hook	Surface Pendant Hook	Surface Pendant	Surface Cable Pole	Surface	Surface Pendant Chain