




CATEGORY	LUMINAIRE LOCATION DESIGNATION
LOW BAY	SURFACE/WALL MOUNT; PENDANT


WET | **IP65** | **TITLE 24** | **SANITATION** | **CSA** | **IK05**

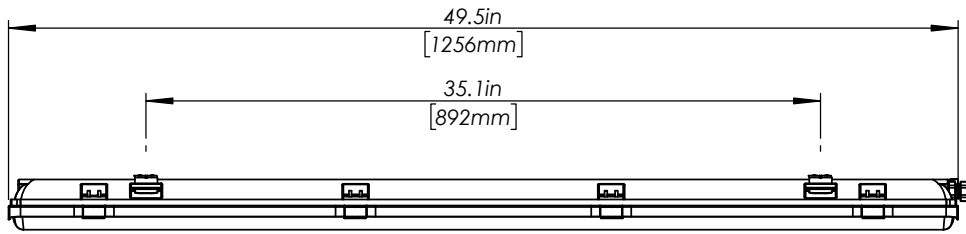

PERFORMANCE			
CCT	EFFICACY	LUMENS (+/- 5%)	CRI
4000°K	117 lm/W	4090 lm	>80.0
5000°K	119 lm/W	4156 lm	>80.0
L70 (HR)	>60,000		
WEIGHT		9 lbs	
AMBIENT TEMPERATURE HT		-25°C(-4°F)/40°C(104°F)	
AMBIENT TEMPERATURE SA		0°C(32°F)/40°C(104°F)	

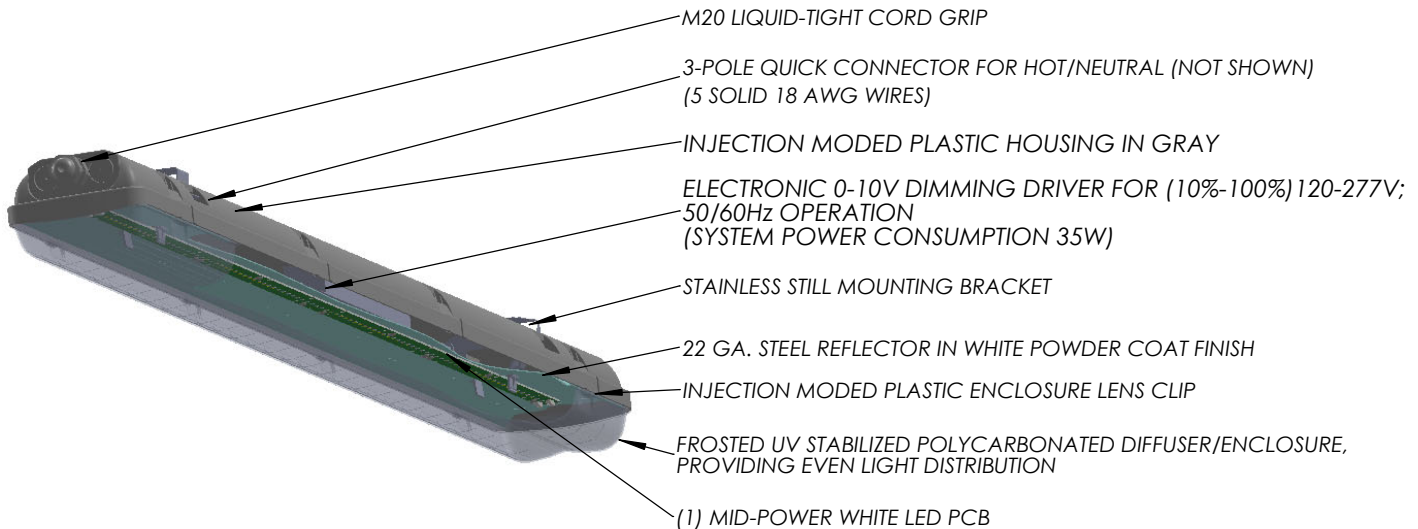

SURFACE MTG.
(HARDWARE BY OTHERS)



NOTE:
WHEN WALL MOUNTING, DAMP LOCATION ONLY

This document is the property of and contains information proprietary to Beghelli, Inc. It is submitted in confidence and is to be used solely for the purpose for which it was furnished and returned upon request. This document and such information is not to be reproduced, transmitted, disclosed, or used otherwise in whole or in part without prior written authorization of Beghelli, Inc. The recipient's acceptance of this document shall be considered an agreement to the foregoing.



BEGHELLI USA
3810 Executive Way
Miramar, Florida 33025
Ph: 954 442 6600
Fx: 954 442 6677
www.beghelliusa.com

BEGHELLI MEXICO
Av. del Marqués No. 70 Int.4. Parque Industrial Bernardo Quintana
C.P. 76246 El Marqués, Qro. México
Tel: 1 52 (442) 221.62.15/221.64.39
www.beghelli.com.mx

TITLE:

BS101LEDECO-E4HTHOWT40,50, 120-277V

	DRAWN BY: THU	DATE: 04/05/21	APPROVED BY: WGA
	MATERIAL:		
DWG NO: 117000XXX	SCALE: N/A		REV: 00
SIZE: A	SHEET: 1 of 2		

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS = INCHES
ANGLES ± 1°

TOLERANCES:
.X = ± 0.030"
.XX = ± 0.015"
.XXX = ± 0.005"

CATEGORY	LUMINAIRE LOCATION DESIGNATION
LOW BAY	SURFACE/WALL MOUNT; PENDANT

WET	IP65	TITLE 24	SANITATION	CSA	IK05
------------	-------------	-----------------	-------------------	------------	-------------

OPTIONS

HSG


SS

TPB

TPS




21



21
2221
21

01



21
2221
021
21

201



21
2221
2202221
021
21

HOUSING IS AVAILABLE IN WHITE OR BLACK (CONTACT FACTORY FOR DETAIL)


18-8 STAINLESS STEEL CLIPS

TAMPER-PROOF UNDER DRIVER BIT


18-8 STAINLESS STEEL TAMPER-PROOF SCREW

OPTIONAL MOUNTINGS: AVIATION CABLE (TYP. 50", 72", 100", 150", 250"; OTHERWISE FIELD ADJUSTABLE), SINGLE PENDANT, SWIVEL SINGLE PENDANT, SWIVEL DOUBLE PENDANT, DOUBLE PENDANT (FOR ALL PENDANT, STEM LENGTHS ARE TYP. 12", 24", 48", OTHER SPECIFY), CHAIN HANG (TYP. 12", 24", 36", 48", OTHER SPECIFY), TRUNION MOUNT, PIVOT MOUNT, J-BOX MOUNT, MAGNET MOUNT, QUICK MOUNT BRACKET; SEE SEPARATE **MOUNTING INSTALLATION INSTRUCTION SHEET** FOR DETAILS


AC
(AVIATION CABLE)




SPK
(SINGLE PENDANT KIT)




DPK
(DOUBLE PENDANT KIT)




SVLPK
(SWIVEL SINGLE PENDANT KIT)




SVLDPK
(SWIVEL DOUBLE PENDANT KIT)




CH
(CHAIN HANG)




TM
(TRUNION MOUNT)




PM
(PIVOT MOUNT)



QMB
(QUICK MOUNT BRACKET)

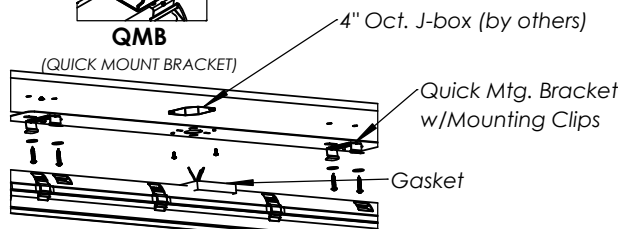

JM
(JUNCTION BOX MOUNT)

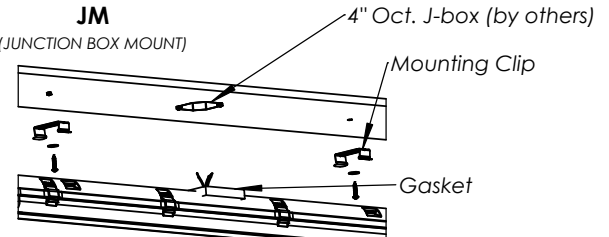

FA - Fully assembled fixture. (Includes latches & grommets installed at the factory). Can be combined with the JM option.

(Available for standard surface mount & JM)


This document is the property of and contains information proprietary to Beghelli, Inc. It is submitted in confidence and is to be used solely for the purpose for which it was furnished and returned upon request. This document and such information is not to be reproduced, transmitted, disclosed, or used otherwise in whole or in part without prior written authorization of Beghelli, Inc. The recipient's acceptance of this document shall be considered an agreement to the foregoing.

BEGHELLI USA
3810 Executive Way
Miramar, Florida 33025
Ph: 954 442 6600
Fx: 954 442 6677
www.beghelliusa.com

BEGHELLI MEXICO
Av. del Marqués No. 70 Int.4. Parque Industrial Bernardo Quintana
CP. 76246 El Marqués, Qro, México
Tel: 1 52 (442) 221.62.15/221.64.39
www.beghelli.com.mx

TITLE:

BS101LEDECO-E4HTHOWT40,50, 120-277V



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS = INCHES ANGLES ± 1°

TOLERANCES:
.X = ± 0.030"
.XX = ± 0.015"
.XXX = ± 0.005"

DRAWN BY: THU	DATE: 04/05/21	APPROVED BY: WGA
MATERIAL:		
DWG NO: 117000XXX		REV: 00
SIZE: A	SCALE: N/A	SHEET: 2 of 2

A

B

ENG-SPEC-BST01ECO-EHO-040521