




CATEGORY	LUMINAIRE LOCATION DESIGNATION
LOW BAY	SURFACE/WALL MOUNT; PENDANT

WET	IP65	TITLE 24	SANITATION	CSA	IK05
-----	------	----------	------------	-----	------

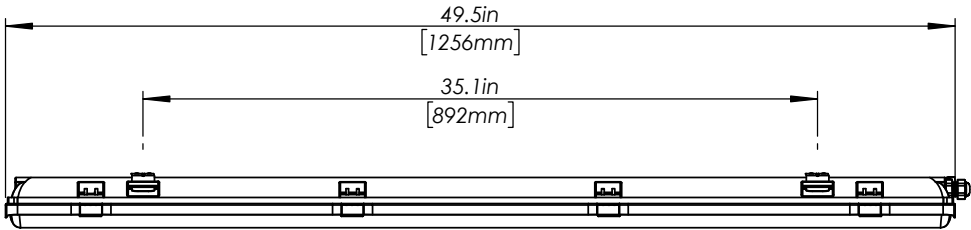


PERFORMANCE			
CCT	EFFICACY	LUMENS (+/- 5%)	CRI
4000°K	117 lm/W	4090 lm	>80.0
5000°K	119 lm/W	4156 lm	>80.0
WEIGHT		9 lbs	
AMBIENT TEMPERATURE HT		-25 °C(-4 °F)/40 °C(104 °F)	
AMBIENT TEMPERATURE SA		0 °C(32 °F)/40 °C(104 °F)	

- **L70 REPORTED: >60,000 HOURS**
- **L70 PROJECTED: 100,000 HOURS**

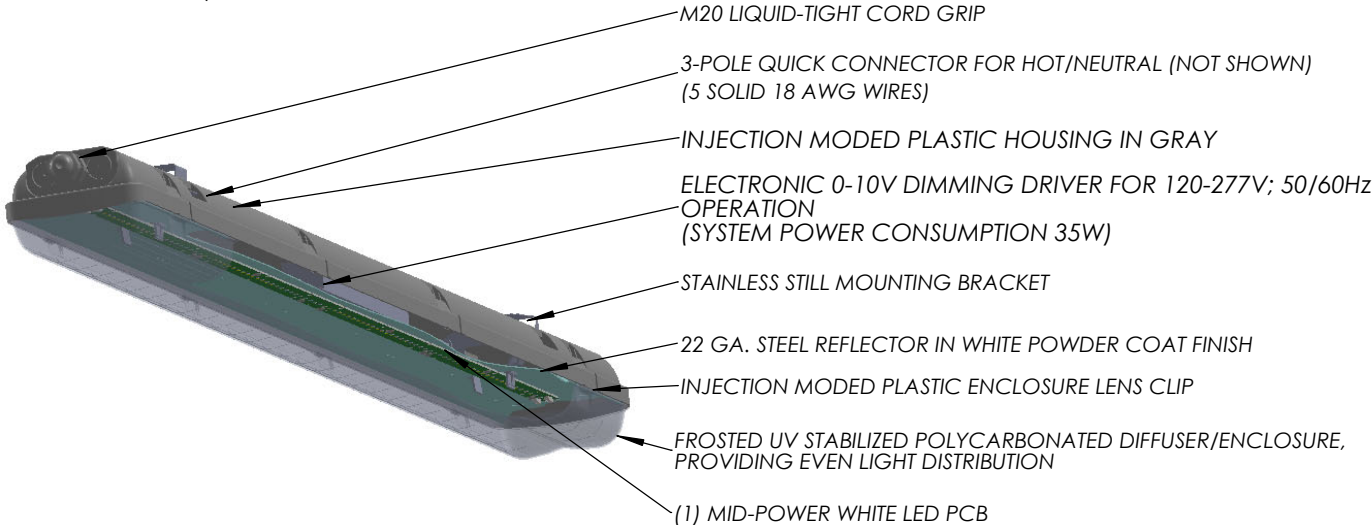

SURFACE MTG.
(HARDWARE BY OTHERS)



NOTE:
WHEN WALL MOUNTING, DAMP LOCATION ONLY

This document is the property of and contains information proprietary to Beghelli, Inc. It is submitted in confidence and is to be used solely for the purpose for which it was furnished and returned upon request. This document and such information is not to be reproduced, transmitted, disclosed, or used otherwise in whole or in part without prior written authorization of Beghelli, Inc. The recipient's acceptance of this document shall be considered an agreement to the foregoing.

BEGHELLI USA
3810 Executive Way
Miramar, Florida 33025
Ph: 954 442 6600
Fx: 954 442 6677
www.beghelliusa.com

BEGHELLI MEXICO
Av. del Marqués No. 70 Int.4. Parque Industrial Bernardo Quintana
CP. 76246 El Marqués, Qro., México
Tel: 1 52 (442) 221.62.15/221.64.39
www.beghelli.com.mx

TITLE:

BS101LEDECO-E4HTHOWT40,50, 120-277V

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS = INCHES
ANGLES ± 1°

TOLERANCES:

.X = ± 0.030"

.XX = ± 0.015"


.XXX = ± 0.005"

DRAWN BY: THU	DATE: 04/05/21	APPROVED BY: WGA
MATERIAL:		
DWG NO: 117000XXX		REV: 00
SIZE: A	SCALE: N/A	SHEET: 1 of 2


A		B				
CATEGORY	LUMINAIRE LOCATION DESIGNATION	WET	IP65	TITLE 24	SANITATION	CSA IK05

LOW BAY SURFACE/WALL MOUNT; PENDANT

OPTIONS

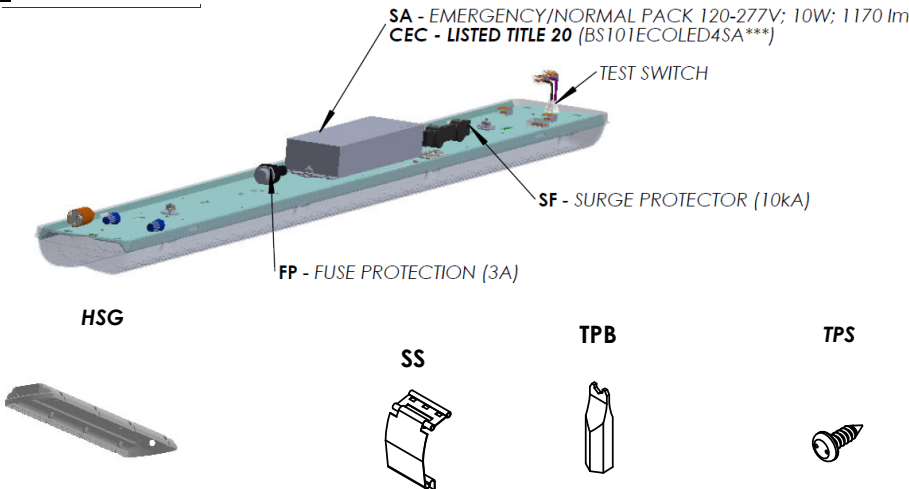

SENSORS



CRMB 9

STANDARD RANGE 360°
SENSOR; EXTERNAL;
INDOOR (SEE SPEC. FOR
DETAILS)



SBOR FAMILY

IP65 RATED 360° SENSOR;
EXTERNAL; OUTDOOR;
MORE ADVANCE SETTING
(SEE SPEC. FOR DETAILS)



FSP-221B-S FAMILY

IP66 RATED 360° SENSOR
EXTERNAL OUTDOOR
PHOTO/MOTION SENSOR;
MORE ADVANCE SETTING
(SEE SPEC. FOR DETAILS)


HOUSING IS AVAILABLE IN WHITE
OR BLACK (CONTACT FACTORY
FOR DETAIL)

18-8 STAINLESS STEEL
CLIPS

TAMPER-PROOF
UNDER DRIVER BIT

18-8 STAINLESS STEEL
TAMPER-PROOF SCREW

OPTIONAL MOUNTINGS: AVIATION CABLE (TYP. 50", 72", 100", 150", 250"; OTHERWISE FIELD ADJUSTABLE) ,SINGLE PENDANT,
SWIVEL SINGLE PENDANT, SWIVEL DOUBLE PENDANT, DOUBLE PENDANT (FOR ALL PENDANT, STEM LENGTHS ARE TYP. 12", 24",
48", OTHER SPECIFY), CHAIN HANG (TYP. 12", 24", 36", 48", OTHER SPECIFY), TRUNION MOUNT, PIVOT MOUNT, J-BOX MOUNT,
MAGNET MOUNT, QUICK MOUNT BRACKET; SEE SEPARATE **MOUNTING INSTALLATION INSTRUCTION** SHEET FOR DETAILS

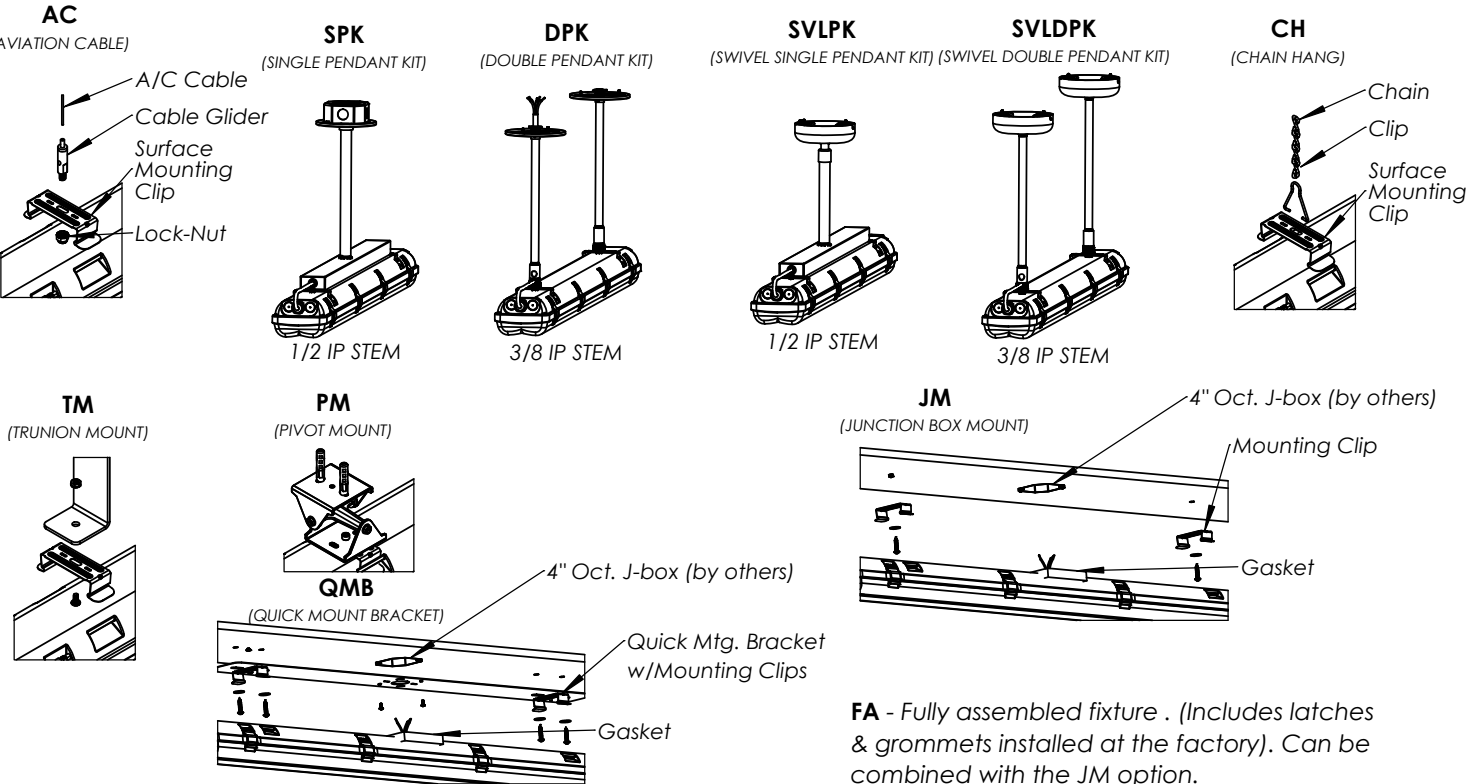

(Available for standard surface mount & JM)

This document is the property of and contains information proprietary to Beghelli, Inc. It is submitted in confidence and is to be used solely for the purpose for which it was furnished and returned upon request. This document and such information is not to be reproduced, transmitted, disclosed, or used otherwise in whole or in part without prior written authorization of Beghelli, Inc. The recipient's acceptance of this document shall be considered an agreement to the foregoing.


Beghelli

BEGHELLI USA
3810 Executive Way
Miramar, Florida 33025
Ph: 954 442 6600
Fx: 954 442 6677
www.beghelliusa.com

BEGHELLI MEXICO
Av. del Marqués No. 70 Int.4. Parque
Industrial Bernardo Quintana
CP. 76246 El Marqués, Qro., México
Tel: 1 52 (442) 221.62.15/221.64.39
www.beghelli.com.mx

TITLE:

BS101LEDECO-E4HTHOWT40,50, 120-277V

 <p>UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS = INCHES ANGLES ± 1°</p> <p>TOLERANCES: .X = ± 0.030" .XX = ± 0.015" .XXX = ± 0.005"</p>	DRAWN BY: THU	DATE: 04/05/21	APPROVED BY: WGA
	MATERIAL:		
	DWG NO: 117000XXX	REV: 00	
	SIZE: A	SCALE: N/A	SHEET: 2 of 2

A

B

ENG-SPEC-BS101ECO-EHO-040521