

Job/Location: _____
 Contractor: _____
 Prepared By: _____

Job Type: _____
 Date: _____




internal

AC only, and self-powered come standard configured with configured with high output, high efficiency LED's, 120/277V input. Self-Powered (SA) models use nickel cadmium batteries that provide a minimum 90 minutes of emergency duration. Optional 120 minute duration battery is available. Solid state charger & transfer. Fuse protection is standard.

external

The cylindrical housing is constructed as a single piece from extruded aluminum. The canopy is made from durable die-cast aluminum and the end caps from machined aluminum. The high clarity acrylic face plate is available in both single face or double face versions, with a clear, white, or mirrored (please specify). Field adjustable chevrons are standard. White, baked powder coat finish is standard on all versions. Available in custom colors and finishes (please specify). External LED monitor light and test switch are standard on self-powered versions.

dimensions

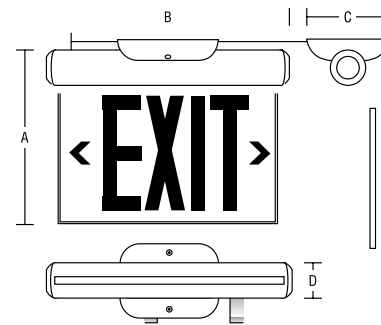

Series	A	B	C	D
CYC	9"	12.5"	4.5"	2"
(wall/ceiling)	229 mm	318 mm	114 mm	51 mm
CYC (end)	N/A	14.5"	N/A	2"
	N/A	368 mm	N/A	51 mm

ordering logic

EXAMPLE: CYC SA LR2 MIR WCS BLK

Series	Operation	Letter Color	No. of Faces	Panel	Mounting	Options
CYC	HT (AC Only)	LR (red)	1 (single)	CLR ¹ (clear)	ES (end surface)	120SA (120 minute emergency)
	SA (Self-powered)	LG (green)	2 (double)	MIR (mirror) WHT (white)	WCS (wall/ceiling surface)	BA (brushed aluminum finish) BLK (black finish) CC (custom color - specify) PA (polished aluminum finish) SW (special wording - specify)
Accessories						
1PK12B ² (12" pendant kit - black)						
1PK12W ² (12" pendant kit - white)						

NOTE 1: Clear available single face only
 NOTE 2: Consult factory for alternate lengths

■ electrical

BATTERY: The **CYCLONE-SA** is designed with a maintenance free, Nickel-Cadmium battery providing a minimum emergency duration of 90 minutes. Recharge time of the battery is twenty-four (24) hours. The maximum battery working temperature is 45°C. The minimum working temperature is 10°C.

CIRCUIT: The **CYCLONE** is configured with high output, high efficiency LEDs. Standard with 120/277V input. All LED versions consume 2W or less nominal power.

■ mechanical

The **CYCLONE** uses cutting edge technology and style. The one-piece cylindrical housing is extremely rigid and holds all of the LED circuitry in precision formed mounting channels. The indirect LED illumination lights the acrylic face with crisp, even light. The clear area of the ultra thin face plate virtually disappears once installed. The choice of clear, white, mirrored or self-luminous backgrounds allow the **CYCLONE** to be best matched to the decor. A wide variety of finishes and mounting configurations available will ensure that the **CYCLONE** can be suited to your installation.

■ self-powered versions

The **CYCLONE-SA** is designed to operate on battery power in the event of a power failure. Both the battery and charger are completely contained within the standard enclosure. There are no alterations made to the external dimensions of the standard sign. The **CYCLONE-SA** utilizes a solid state transformer that eliminates the possibility of relay failure due to particle build up on the relay. Status is easily determined via an LED that indicates AC-ON. A push button test switch allows maintenance personnel to quickly confirm the operational status of the exit on AC fail.

■ warranty

The **CYCLONE** comes with a 5-year factory warranty. Deliberate image, misuse, improper installation effectively cancel the warranty. Find complete warranty details online at beghelliusa.com.