

PACO PS REMOTES



Job/Location: _____
 Contractor: _____
 Prepared By: _____

Job Type: _____
 Date: _____




■ PACO PS high output led remote heads

The **PACO PS**, fully adjustable square remote heads utilize 12 high output LEDs per head. For use as part of an emergency lighting system, providing light for path of egress. Compatible with Beghelli Paco PX exit, Paco PCH combo, Paco PEH-1 unit and PEH-T20 unit only.

■ specifications: electrical

For remote single heads, maximum wattage is 1.72W. For remote double heads, maximum wattage is 3.4W total. Powered from low voltage power source (3.6V batteries). Low voltage wiring not provided. The operating temperature is from 68°F up to 86°F (20°C up to 30°C).

■ dimensions (in,mm.)

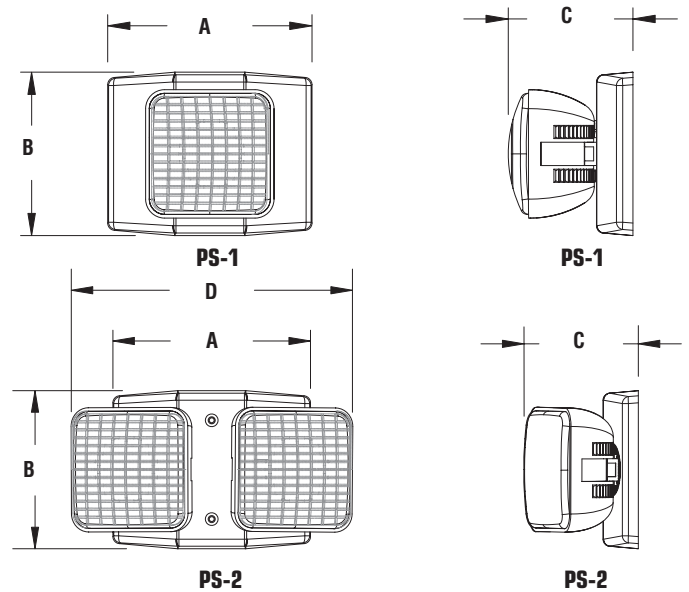

Series	A	B	C	D
PS-1	5.5" 139mm	4.4" 111mm	3.2" 81mm	N/A
PS-2	5.5" 139mm	4.4" 111mm	3.4" 86mm	7.8" 198mm

■ ordering logic

EXAMPLE: PS 1

Series	Head #	Options
PS	1 (single head)	B (black housing)
	2 (double head)	