



HAZARDOUS BLITZ

while supplies last

NO MINIMUM

MODEL	ITEM	DESCRIPTION	SALE PRICE	SAVINGS	QTY AVAILABLE
(C1D2, Groups A,B,C & D; Group II, Zones 1 & 2; Zones 21 & 22; IP67; IK09)					
CAS HT LO WT30 WBD 120 277V	117102343	AC only, 30W, 3000K	\$75	68%	126
CAS HT MO WT30 WBD 120 277V	117102346	AC only, 100W, 3000K	\$100	77%	12
CAS HT MO WT50 WBD 120 277V	117102348	AC only, 100W, 5000K	\$276	37%	5
CAS HT HO WT30 WBD 120 277V	117102349	AC only, 200W, 3000K	\$125	82%	14
CAS HT HO WT40 WBD 120 277V	117102350	AC only, 200W, 4000K	\$160	77%	5
CAS HT HO WT50 WBD 120 277V	117102351	AC only, 200W, 5000K	\$417	41%	11

SEE SPEC SHEET BELOW

TERMS & CONDITIONS:

Cannot be combined with any other discounts or promotions. Sales from the Hazardous Blitz will not apply towards annual incentive bonus.
Sales are final (no returns). 3% commission applies. 100% overage. Standard freight terms apply. Valid while supplies last.

Type: _____

Project: _____

CASTEX

TITLE
24

HIGH BAY

- **CASTEX** is a hazardous location LED lighting fixture Class I Division 2, Groups A,B,C and D; Group II, Zone 1 & Zone 2; Zone 21 & 22.
- The **CASTEX** comes standard in gray with a surface/wall mount bracket.
- **HOUSING:** aluminum alloy.
- **COLOR TEMPERATURES:** 3000K, 4000K and 5000K.
- **LUMENS:** LO: 3000 lm MO: 11000 lm HO: 20000 lm
- **OPERATING TEMP:** HT (AC Only) -40°F up to 122°F (-40°C to 50°C)
- **WEIGHT:** LO: 8.8 lbs/ 3.9 kg MO: 11 lbs/ 4.9 kg HO: 17 lbs/ 7.7 kg




APPLICATION: The **CASTEX** is ideal for heavy industry, mining, refineries, chemical industry, coastal marine facilities and corrosive applications.

CONFIGURATIONS (while supplies last)

MODEL	ITEM	DESCRIPTION	SALE PRICE	SAVINGS	QTY AVAILABLE
(C1D2, Groups A,B,C & D; Group II, Zones 1 & 2; Zones 21 & 22; IP67; IK09)					
CAS HT LO WT30 WBD 120 277V	117102343	AC only, 30W, 3000K	\$75	68%	126
CAS HT MO WT30 WBD 120 277V	117102346	AC only, 100W, 3000K	\$100	77%	12
CAS HT MO WT50 WBD 120 277V	117102348	AC only, 100W, 5000K	\$276	37%	5
CAS HT HO WT30 WBD 120 277V	117102349	AC only, 200W, 3000K	\$125	82%	14
CAS HT HO WT40 WBD 120 277V	117102350	AC only, 200W, 4000K	\$160	77%	5
CAS HT HO WT50 WBD 120 277V	117102351	AC only, 200W, 5000K	\$417	41%	11


TECHNICAL INFORMATION

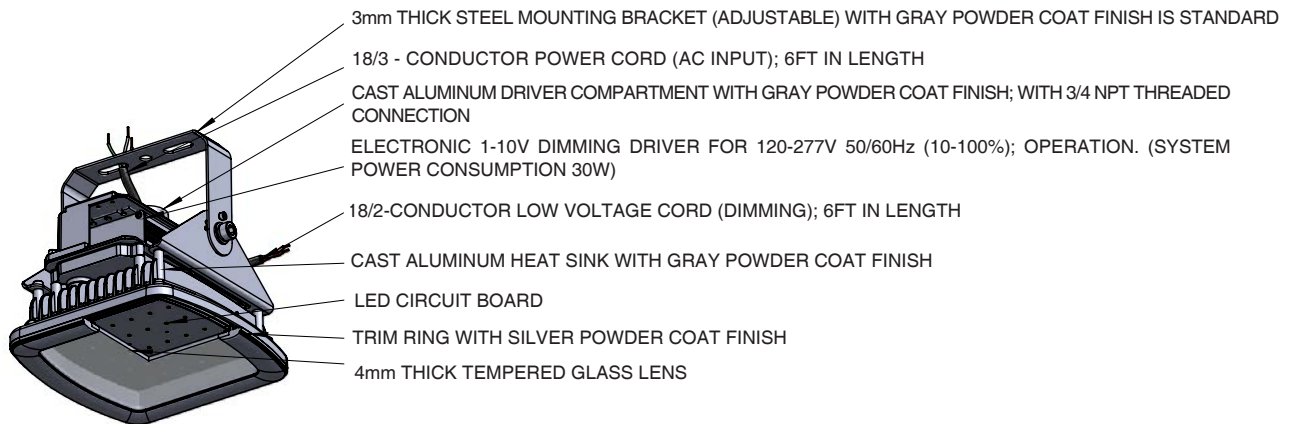

MOUNTING OPTIONS


STANDARD

MB (surface wall/mount bracket)
(AIMABLE 90° BOTH SIDES -22.5° INCREMENTS)




OPTIONAL


PK (pendant kit)
(TYP. 12", 24", 48", other specify)

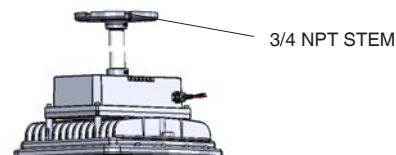

DIMENSIONS

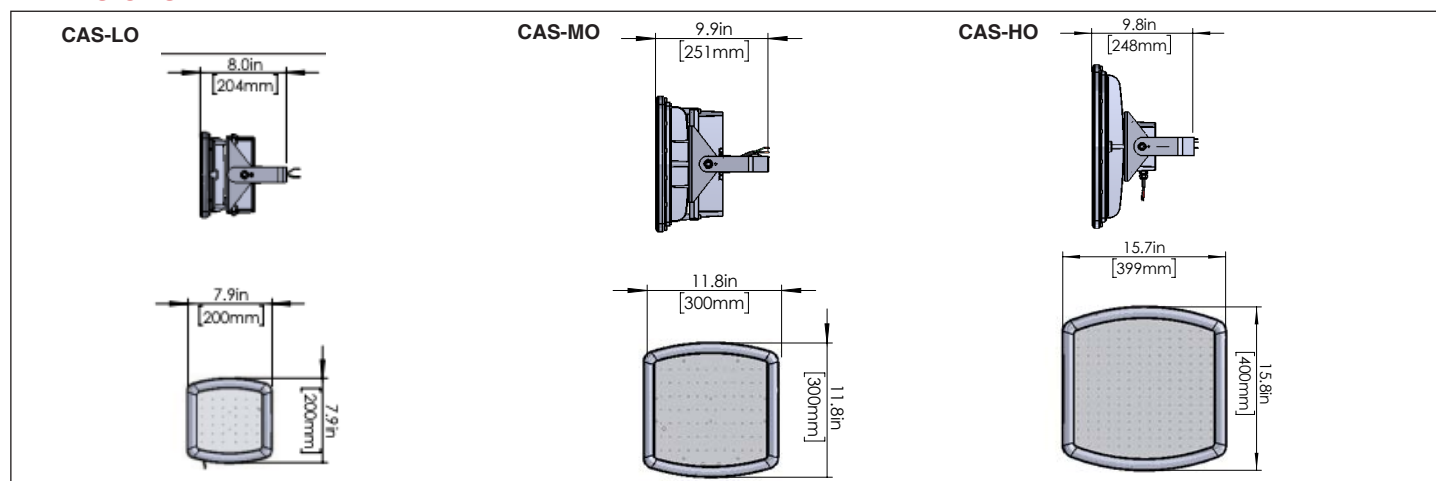

PHOTOMETRICS

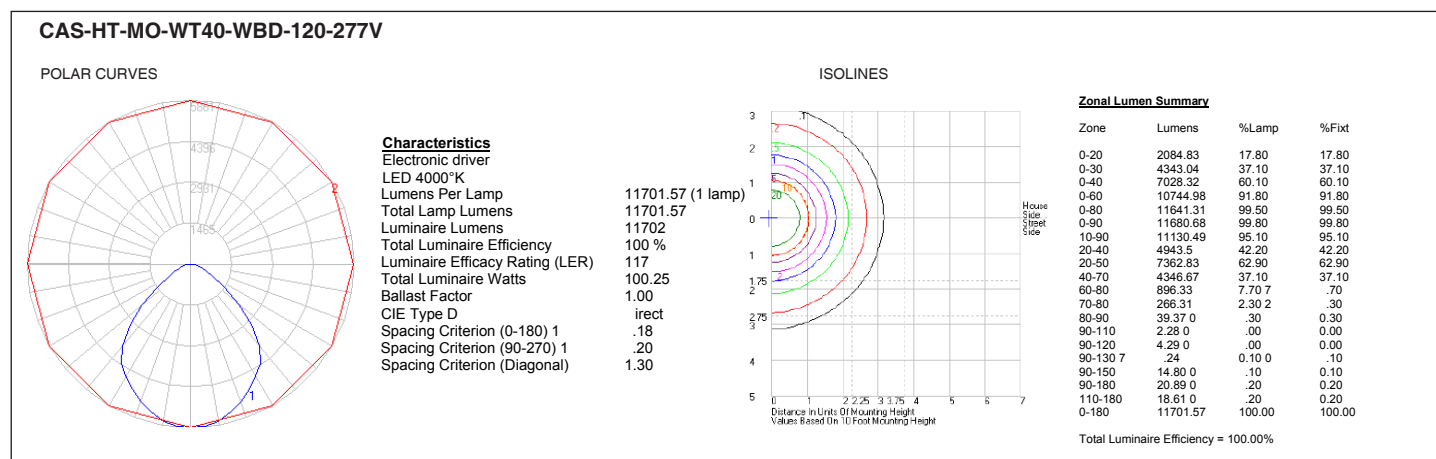

ENERGY CHART

MODEL	EFFICACY	CONSUMPTION WATTAGE	LUMEN OUTPUT	CRI	L70 (hrs.)
CAS-HT-LO-WT40-WBD-120-277V	112 lm/W	30	3132	>70	>54,000
CAS-HT-MO-WT40-WBD-120-277V	117 lm/W	100	11702	>70	>54,000
CAS-HT-HO-WT40-WBD-120-277V	115 lm/W	200	21313	>70	>54,000

ELECTRICAL RATING

PRODUCT	NOMINAL POWER (W)	AC CURRENT (A) AC VOLTAGE 120V 277V	FREQUENCY (HZ)	DC VOLTAGE (V)	DC CURRENT (MA)
CAS-HT-LO	30	0.26 0.11	50/60	41	760
CAS-HT-MO	100	0.85 0.37	51/60	38	2100
CAS-HT-HO	200	1.7 0.74	50/60	40	4600

DIMMER COMPATIBILITY

DIMMER	COMPATIBILITY ON / OFF DIMMING
LEVITON - AWRMG-7	YES YES
LUTRON - DIVA DVSTV	YES YES

■ **WARRANTY:** 5 years warranty, see website for full warranty details.