

SEA REMOTE



Project: _____

Type: _____

Model: _____

Date: _____

external specifications

The **SEA** remote is made from die-cast aluminum head with a glass lens that offers protection and superior performance. The powder coated aluminum canopy is fully gasketed and suitable for wet locations. The flex arm design allows you to position the remote by moving the flex arm up and down as you rotate side to side.

nema 4x design

The **SEA remote** has been designed to withstand moisture and corrosive elements and has a NEMA 4X rating. The entire internal cavity of the remote is protected from moisture ingress by an extremely resilient gasket. The operating temperature is from -22° to 104°F (-30 to 40°C).

installation

The **SEA** remote is supplied with a weatherproof canopy designed to fit most electrical junction boxes for surface ceiling or wall mount applications. Suitable for indoor, outdoor, damp or wet locations with NEMA 4X protection.

sanitation listed



The **SEA** remote is sanitation listed. The Intertek verified splash zone listing is equivalent to the NSF standard 2, meeting the rigorous sanitation standards of food service environments.

lamp selection


	6V	12V	24V
MR16	-	50W	-
MR16 LED	5, 7W	2, 5, 7W	5, 7W

warranty

The **SEA** remote comes with a 3-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.



dimensions (in,mm.)

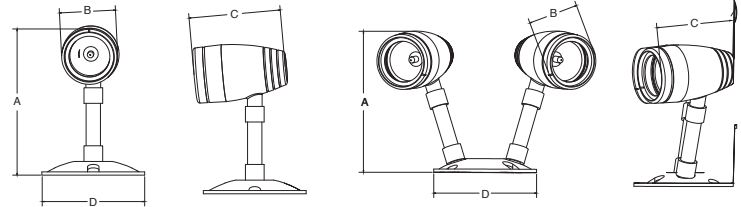

SEA remote	A	B	C	D
Single Head	5 ⁷ / ₈ " 149mm	2 ¹ / ₄ " 57mm	3 ¹¹ / ₁₆ " 94mm	4 ¹ / ₈ " 105mm
Double Head	5 ⁵ / ₈ " 143mm	2 ¹ / ₄ " 57mm	3 ¹¹ / ₁₆ " 94mm	4 ¹ / ₈ " 105mm

ordering information

EXAMPLE: SEA2 12V5WLED

Sea remote	Head No.	Voltage	Lamp	Options
SEA	1 (single)	6V	See Lamp Selection	TC (Teflon® coated lens)
	2 (double)	12V		
		24V		