

NON-BUGEYE
**EMERGENCY
SOLUTIONS**

TABLE OF CONTENTS

PLURALUCE
INDOOR  01

PLURALUCE
RECESSED  01

PLURALUCE
SQUARE  02

PLURALUCE
WP  02

PLURALUCE
HZ  02

TEMPESTA
LED  03

TEMPESTA
LED ECO  03

TEMPESTA
PLUS  04

ACCIAIO
BX910 SE  04

MEZZO  05

MURO  05

INDOOR UNIT

Compact modern die-cast design (6" square)

Symmetrical & asymmetrical distribution

LEDs deliver 782 to 845 lm (4000K CCT)

Up to 60' spacing in emergency operation

White, black & brushed aluminum finishes (std)



PLURALUCE INDOOR

ROUND RECESSED

Low profile trim for seamless fit in ceiling

LEDs deliver 782 to 845 lm (4000K CCT)

Up to 60' spacing in emergency operation

Symmetrical and asymmetrical optics included

White aluminum trim ring standard



PLURALUCE RECESSED



SQUARE RECESSED UNIT

Clean modern look with seamless trim (9" sq)

LEDs deliver 826 to 845 lm (4000K CCT)

Up to 55' spacing in emergency operation

Symmetrical and asymmetrical optics included

Non-IC installations only



PLURALUCE SQUARE



PLURALUCE WP

WEATHERPROOF NEMA 4X

Protected against moisture, dust and corrosion

Compact (7" sq) durable aluminum construction

LEDs deliver 782-845 lm (4000K CCT)

Up to 60' spacing in emergency operation

Symmetrical and asymmetrical optics included



HAZARDOUS UNIT

Compact, durable aluminum construction (7" sq)

Class I, Division 2, Groups A-D

LEDs deliver 782-845 lm (4000K CCT)

Up to 60' spacing in emergency operation

Symmetrical and asymmetrical optics included



PLURALUCE HZ



TEMPESTA LED

WET LOCATION EMERGENCY

1990 lm in EM mode

Up to 70' on-center spacing

120 min UL924 emergency duration (NiMh)

Field-adjustable ceiling and wall mount

AC only, EM only and AC & EM models



WET LOCATION EMERGENCY

925 lm in EM mode

Up to 42' on-center spacing

90 min UL924 emergency duration (NiMh)

Field-adjustable ceiling or wall mount

AC only or AC & EM models



TEMPESTA LED ECO





TEMPESTA T20

TITLE 20 EMERGENCY UNIT

1491 lm in EM mode

Flame & corrosion resistant polycarbonate

Up to 80' on-center spacing

Operating temperatures: HT -20°C to +40°C

SA/SE 10°C to 40°C



INDUSTRIAL HIGH OUTPUT - 2FT

1700 lm, up to 80' spacing (18' ht)

Durable 24 gauge steel housing


Polycarbonate diffuser std

180-degree adjustable mount for ceiling or wall

Ideal for high mounting heights



ACCIAIO BX910 SE

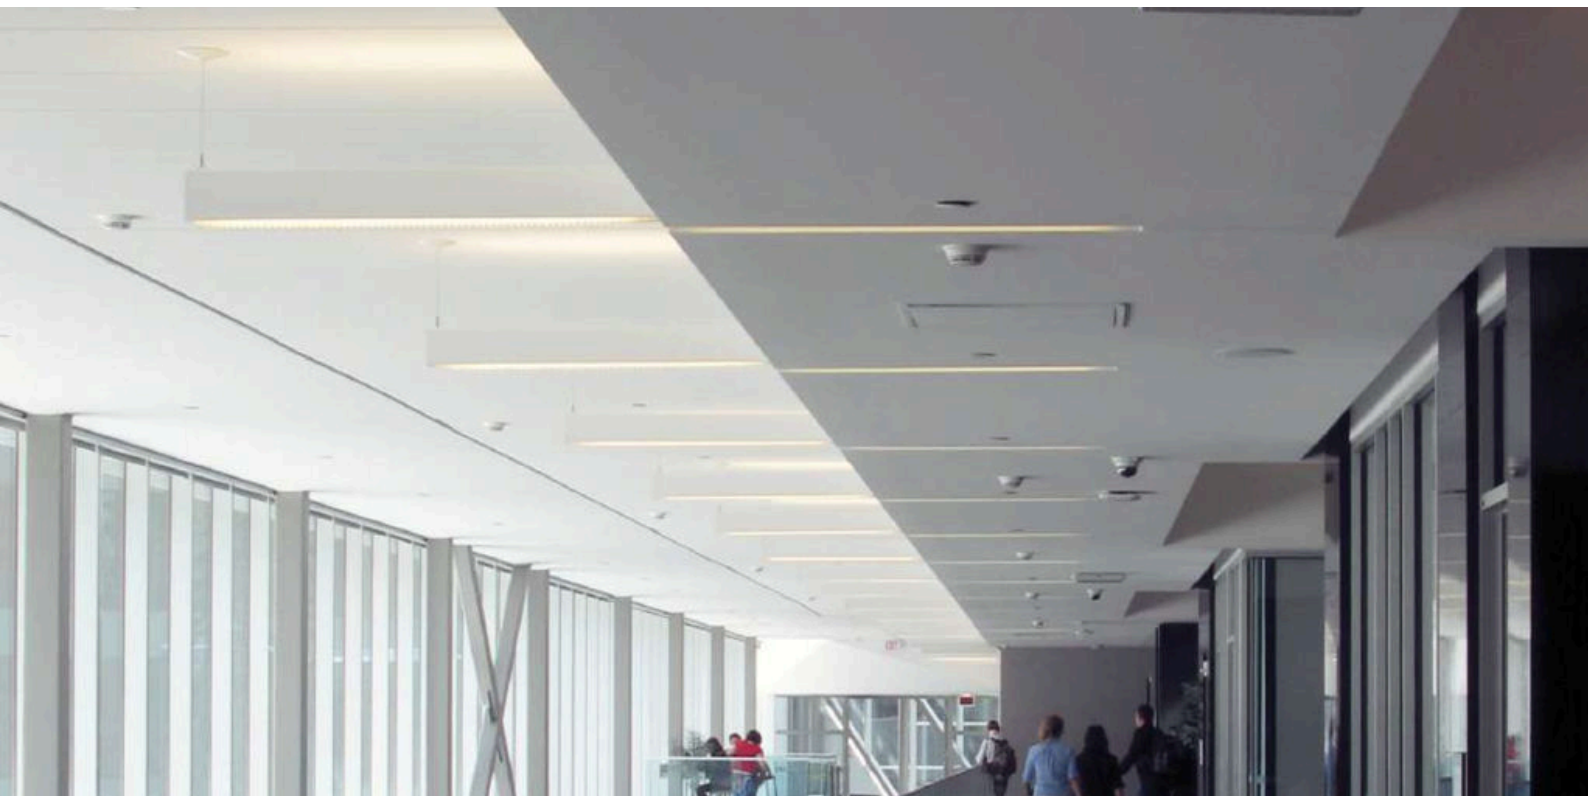



MEZZO

ARCHITECTURAL HIGH PERFORMANCE

12W, 4000K CCT LED emergency wall pack

Standard photocontrol and autotest

Die-cast aluminum with polycarbonate lens

Multiple finishes

Ideal for high mounting heights



SLIM ARCHITECTURAL LED WALLPACK

1500 lm in AC mode, 600 lm in emergency mode

Low-profile emergency LED wallpack

Photocontrol with optional PIR sensor

Up to 60' on-center spacing

Operating temperatures -25°C to +50°C



MURO





BEGHELLI USA
3810 Executive Way
Miramar, FL 33025
954.442.6600

A photograph of a modern, minimalist lounge area. The room features several white, rectangular reception desks arranged in a line. The walls are a neutral, light gray color, and the floor is made of large, light-colored square tiles. In the background, there is a door and two tall, white cylindrical planters with green plants. The lighting is soft and even, creating a clean and professional atmosphere.

Beghelli
lounge

www.beghelliusa.com