

Job: _____
 Model: _____

Type: _____
 Date: _____



■ internal


The **TEMPESTA™ LED** is an emergency light suitable for surface or recessed mount and t-bar. It is available with a choice of operations: HT (AC only), SE (emergency only) and SA (AC and emergency). Both the **TEMPESTA LED SE** and **SA** versions feature a nickel metal hydride battery that provides a minimum 120 minutes emergency duration. Autotest diagnostics is optional on **TEMPESTA LED SE** and **SA**. **TEMPESTA LED** is configured with 120-347V input.

LED boards are positioned for wall mounting when shipped. Boards can be adjusted on-site for ceiling mount installation. **TEMPESTA LED** is suitable for surface, recessed and t-bar mounting and for wet location installations. Fuse protection is standard.

■ external

The **TEMPESTA LED** series housing is constructed with flame and corrosion resistant polycarbonate. Four vandal resistant clips ensure the integrity of the housing. The **TEMPESTA LED** comes finished in grey RAL7035 color. The external test switch and multi-colored LED allows maintenance personnel to quickly determine the operational status of the unit. The **TEMPESTA LED** diffuser is UV stabilized and provides superior light distribution.

■ dimensions (in,mm)

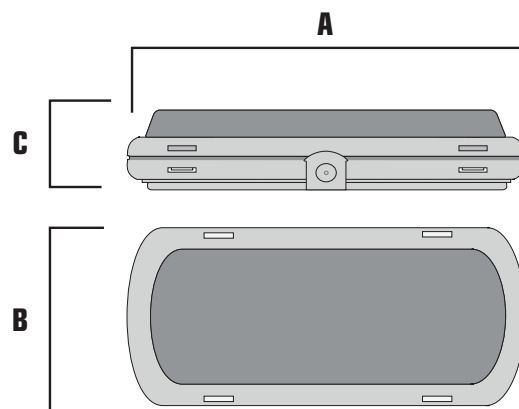

MODEL	A	B	C
S (surface)	17.0" (432mm)	6.7" (170mm)	2.9" (73.6mm)
R (recessed)	20.5" (520mm)	9.2" (234mm)	4.0 (102mm)
TB (t-bar)	23.8" (603mm)	8.5" (216mm)	3.2" (81 mm)

■ ordering information

EXAMPLE: TA LED SE UNV AT

Series	Operation	Input Voltage	Options
TA LED	HT (AC only - normally On)	UNV (120-347V)	AT (autotest, SA & SE only)
	SA (self-powered - always on / EM backup)		BLK (black housing)
	SE (emergency - AC fail only)		RK ¹ (recessed kit, white, trim plate, for drywall & concrete TB (t-bar mount)


NOTE 1: Not available in black

NOTE: Field adjustable for ceiling and wall mount


■ performance: wall mounting

- 1250 lumens in emergency mode
- CCT: 4000K
- Mounting Height: 7.5 ft.
- Path of Egress: 3 ft.
- Spacing: 66 ft. on Center
- Reflectances: 80/50/20
- Footcandles: Average 1.0FC

Performance data is an estimate and will vary based on real life applications. Average 1.0FC, no point less than 0.1FC. Layout assumes open space with no obstructions.

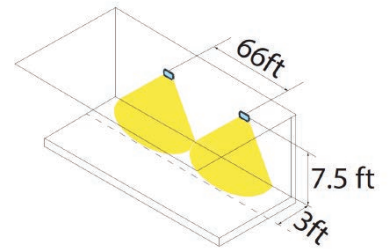

Wall Mount LED Position

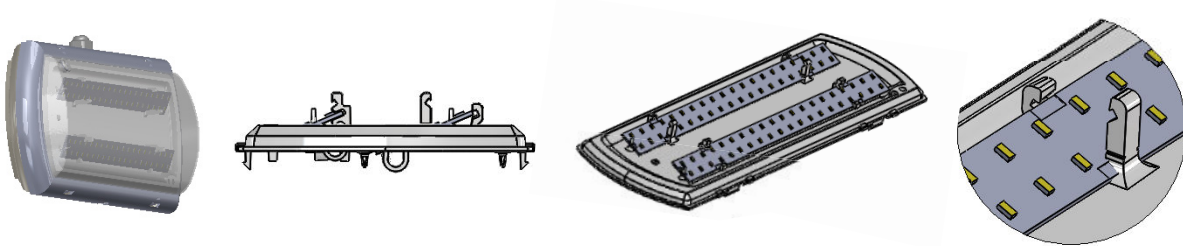

Ceiling Mount LED Position

