

EMERGENCY
LIGHTING SOLUTIONS
PLURALUCE

INDOOR UNIT



Compact modern die-cast design (6" square)

Symmetrical & asymmetrical distribution

LEDs deliver 1349 to 1414 lm (4000K CCT)

Up to 60' spacing in emergency operation

White, black & brushed aluminum finishes (std)



PLURALUCE INDOOR



PLURALUCE RECESSED

ROUND RECESSED



Low profile trim for seamless fit in ceiling

LEDs deliver 1349-1414 lm (4000K CCT)

Up to 60' spacing in emergency operation

Symmetrical and asymmetrical optics included

Aluminum rings comes standard in white

SQUARE RECESSED



Clean modern look with seamless trim (9" sq)

LEDs deliver 1349-1414 lm (4000K CCT)

Up to 60' spacing in emergency operation

Symmetrical and asymmetrical optics included

Non-IC installations only



PLURALUCE SQUARE



PLURALUCE WP

WEATHERPROOF



Protected against moisture, dust and corrosion

Compact (7" sq) durable aluminum construction

LEDs deliver 1349-1414 lm (4000K CCT)

Up to 60' spacing in emergency operation

Symmetrical and asymmetrical optics included


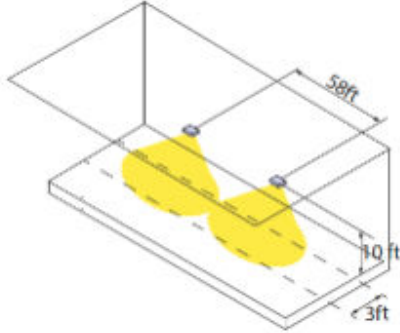

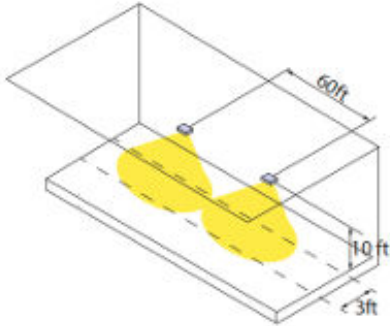

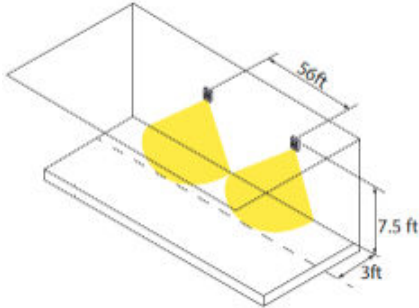
HAZARDOUS UNIT



- Compact, durable aluminum construction (7" sq)
- Class I, Division 2, Groups A-D
- LEDs deliver 1349-1414 lm (4000K CCT)
- Up to 60' spacing in emergency operation
- Symmetrical and asymmetrical optics included



PLURALUCE HZ

OPTICS	PLURALUCE FIXTURE SPACING (1 FC AVERAGE)	
	<p>CEILING MOUNT ASYMMETRIC</p>	
	<p>CEILING MOUNT SYMMETRIC</p>	
	<p>WALL MOUNT ASYMMETRIC</p>	



FORMALUCE COMBO

COMBO UNIT



Die-cast aluminum

Single, double or universal faces; red or green LEDs

Wall, ceiling or universal mount

120-347V, 60 Hz input, 751-900 lm

3 interchangeable optical grade clear lenses

COMBO UNIT



Extruded alum exit with die-cast alum housing

Single, double or universal faces; red or green LEDs

Wall, ceiling or universal mount

120-347V, 60 Hz input, 751-900 lm

3 interchangeable optical grade clear lenses



QUADRALUCE COMBO



STELLALUCE COMBO

COMBO UNIT



20 ga steel exit with luce optics

Single, double or universal faces; red or green LEDs

Wall, ceiling or universal mount


120-347V, 60 Hz input, 751-900 lm

3 interchangeable optical grade clear lenses




OPTICS



COMBO FIXTURE SPACING (1 FC AVERAGE)




**CEILING
SYMMETRIC**

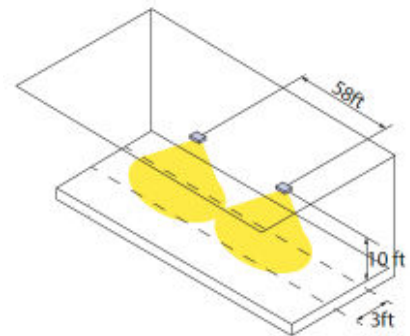

**WALL
FORWARD**

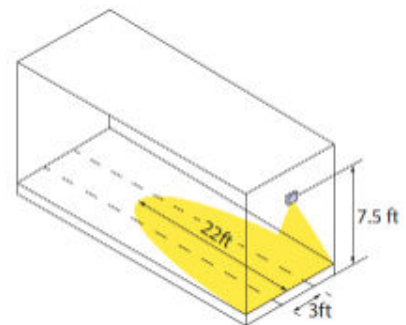

**WALL
WIDE**

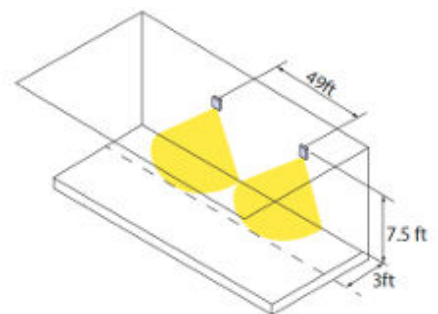



BEGHELLI USA
3810 Executive Way
Miramar, FL 33025
954.442.6600

www.beghelliusa.com