


HDZX



HAZARDOUS EXIT SIGN

KEY FEATURES

- Class I, Div 1 hazardous Exit
- Impact-resistant, clear tempered glass panel
- Red or Green LED
- Rugged IK10 die-cast aluminum housing
- IP66, NEMA 4X

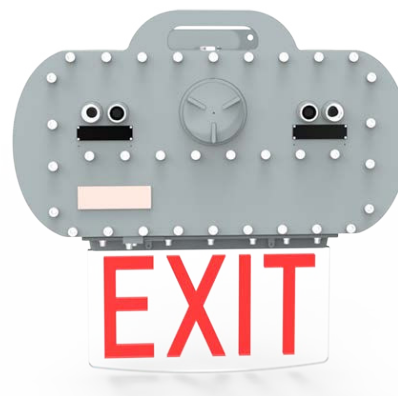

■ The **HDZX** is an explosion proof Exit sign listed to UL 844 and UL 924, and rated for use in hazardous locations:

- Class I, Division 1, Groups C, D
- Class I, Division 2, Groups A, B, C, D
- Class II, Division 1, Groups E, F, G
- Class II, Division 2, Groups F, G
- Class III

ELECTRICAL

- Input Voltage: 120-277VAC, 50-60 Hz
- Power Consumption: 7W charging, 5W standby
- EM Operation: 3 hours
- Battery: Lithium Ion

OPERATING TEMP:

Charging: 32°F to 113°F (0°C to 45°C)
 Discharging: -4°F to 140°F (-20°C to 60°C)

CONSTRUCTION

- Housing: Die-cast aluminum in gray finish, stainless steel hardware, 3/4" NPT conduit entries
- Mounting: Wall mounting
- EXIT Panels: Clear tempered glass, single face, red or green LED


APPLICATION

The HDZX is ideal for power plants, heavy industrial storage facilities, paper mills, waste water treatment plants, petrochemical processing plants, metallurgical, food and alcohol industry facilities, and high vapor, high dust and high temperature locations

ORDERING INFORMATION

| MODEL | DESCRIPTION |
|-----------------|---|
| HDZXSA1R | C1D1 exit, red LED, single face, clear panel, 120-277V, 50-60 HZ - specify any chevrons |
| HDZXSA1G | C1D1 exit, green LED, single face, clear panel, 120-277V, 50-60 HZ - specify any chevrons |

DIMENSIONS

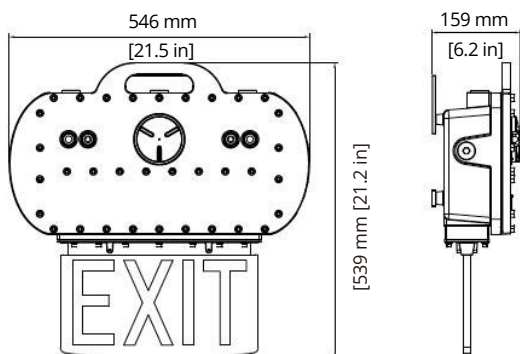

■ **WEIGHT:** 55.1 lb (25 kg)