

IES INDOOR REPORT

PHOTOMETRIC FILENAME : BS100LED4HTVHOWT40120-277V_S.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TESTLAB] Photopia 2020.1.0 see: www.ltioptics.com/ies

[ISSUEDATE]

[TESTDATE] Fri Apr 16 16:08:26 2021

[TEST] 1

[MANUFAC] BEGHELLI

[LUMCAT] LINEAR - INDOOR / OUTDOOR LUMINAIRE

[LUMINAIRE] BS100LED4HTVHOWT40120-277V_S

[LAMP] LED 0.915W DURIS S5 (150mA)

[LAMPCAT] GW PSLRS1.PC-LRLT-5L7N-1

[OTHER]

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	10955
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	157
Total Luminaire Watts	70
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.28
Spacing Criterion (90-270)	1.28
Spacing Criterion (Diagonal)	1.38
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	4.21 ft
Luminous Width (90-270)	0.58 ft
Luminous Height	0.32 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	14363	10694	9949
55	13309	9020	8241
65	11813	7030	6284
75	9804	4731	4107
85	8076	2482	2063

IES INDOOR REPORT
PHOTOMETRIC FILENAME : BS100LED4HTVHOWT40120-277V_S.IES

CANDELA TABULATION

	<u>0</u>
0.0	3708.64
2.5	3680.17
5.0	3712.67
7.5	3687.80
10.0	3655.54
12.5	3599.83
15.0	3572.93
17.5	3492.50
20.0	3454.32
22.5	3361.60
25.0	3299.75
27.5	3216.28
30.0	3125.35
32.5	3054.03
35.0	2947.23
37.5	2828.41
40.0	2727.94
42.5	2606.23
45.0	2485.44
47.5	2347.66
50.0	2212.29
52.5	2072.39
55.0	1924.82
57.5	1779.71
60.0	1629.64
62.5	1466.13
65.0	1320.81
67.5	1165.98
70.0	1015.87
72.5	879.67
75.0	741.21
77.5	610.72
80.0	492.76
82.5	384.82
85.0	299.56
87.5	227.45
90.0	171.87
92.5	127.45
95.0	96.95
97.5	72.55
100.0	56.16
102.5	44.42
105.0	35.00
107.5	28.28
110.0	22.94
112.5	18.98
115.0	13.94
117.5	11.20
120.0	8.02
122.5	6.41
125.0	4.88
127.5	3.23
130.0	1.95
132.5	1.02

IES INDOOR REPORT

PHOTOMETRIC FILENAME : BS100LED4HTVHOWT40120-277V_S.IES

CANDELA TABULATION - (Cont.)

135.0	0.33
137.5	0.12
140.0	0.10
142.5	0.02
145.0	0.00
147.5	0.00
150.0	0.00
152.5	0.00
155.0	0.00
157.5	0.00
160.0	0.00
162.5	0.00
165.0	0.00
167.5	0.00
170.0	0.00
172.5	0.00
175.0	0.00
177.5	0.00
180.0	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : BS100LED4HTVHOWT40120-277V_S.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	1356.67	N.A.	12.40
0-30	2876.11	N.A.	26.30
0-40	4717.32	N.A.	43.10
0-60	8352.00	N.A.	76.20
0-80	10445.00	N.A.	95.30
0-90	10783.94	N.A.	98.40
10-90	10432.03	N.A.	95.20
20-40	3360.64	N.A.	30.70
20-50	5273.77	N.A.	48.10
40-70	4940.03	N.A.	45.10
60-80	2093.00	N.A.	19.10
70-80	787.66	N.A.	7.20
80-90	338.94	N.A.	3.10
90-110	151.31	N.A.	1.40
90-120	166.20	N.A.	1.50
90-130	170.62	N.A.	1.60
90-150	171.14	N.A.	1.60
90-180	171.14	N.A.	1.60
110-180	19.83	N.A.	0.20
0-180	10955.08	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	351.91
10-20	1004.76
20-30	1519.44
30-40	1841.2
40-50	1913.13
50-60	1721.56
60-70	1305.34
70-80	787.66
80-90	338.94
90-100	112.24
100-110	39.07
110-120	14.89
120-130	4.43
130-140	0.50
140-150	0.01
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT

PHOTOMETRIC FILENAME : BS100LED4HTVHOWT40120-277V_S.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	98
1	108	103	98	94	105	100	96	93	96	92	89	92	89	86	88	86	83	81
2	98	89	82	76	95	87	81	75	84	78	73	80	75	71	77	73	70	67
3	89	78	70	63	87	77	69	63	73	67	61	70	65	60	68	63	59	57
4	82	69	60	54	79	68	60	53	65	58	52	63	56	51	60	55	50	48
5	75	62	53	46	73	61	52	46	58	51	45	56	50	44	54	48	44	42
6	69	56	47	40	67	55	46	40	53	45	39	51	44	39	49	43	38	36
7	64	50	42	35	62	50	41	35	48	40	35	46	40	34	45	39	34	32
8	60	46	37	32	58	45	37	31	44	36	31	42	36	31	41	35	31	29
9	56	42	34	28	54	42	34	28	40	33	28	39	33	28	38	32	28	26
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	35	29	25	23


IES INDOOR REPORT
PHOTOMETRIC FILENAME : BS100LED4HTVHOWT40120-277V_S.IES

UGR TABLE - CORRECTED

Reflectances											
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30	
Walls	50	30	50	30	30	50	30	50	30	30	
Floor Cavity	20	20	20	20	20	20	20	20	20	20	
Room Size		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	19.1	20.7	19.5	21.1	21.5	20.2	21.8	20.6	22.1	22.5
	3H	20.6	22.0	21.0	22.4	22.8	21.9	23.3	22.3	23.7	24.1
	4H	21.1	22.4	21.5	22.8	23.3	22.5	23.9	23.0	24.3	24.7
	6H	21.4	22.7	21.9	23.1	23.5	23.1	24.3	23.5	24.7	25.2
	8H	21.5	22.7	22.0	23.2	23.6	23.3	24.5	23.7	24.9	25.4
	12H	21.6	22.8	22.1	23.2	23.7	23.4	24.6	23.9	25.0	25.5
4H	2H	19.7	21.1	20.1	21.5	21.9	20.6	21.9	21.0	22.3	22.7
	3H	21.4	22.5	21.8	23.0	23.4	22.5	23.6	22.9	24.1	24.5
	4H	22.0	23.0	22.4	23.5	24.0	23.2	24.3	23.7	24.7	25.2
	6H	22.4	23.4	22.9	23.8	24.3	23.9	24.8	24.4	25.3	25.8
	8H	22.6	23.4	23.1	23.9	24.4	24.1	25.0	24.6	25.5	26.0
	12H	22.7	23.5	23.2	24.0	24.5	24.4	25.1	24.9	25.6	26.2
8H	4H	22.3	23.1	22.8	23.6	24.1	23.4	24.3	23.9	24.8	25.3
	6H	22.8	23.5	23.3	24.1	24.6	24.1	24.9	24.6	25.4	25.9
	8H	23.0	23.7	23.6	24.2	24.7	24.4	25.1	25.0	25.6	26.2
	12H	23.2	23.8	23.7	24.3	24.9	24.8	25.3	25.3	25.9	26.5
12H	4H	22.3	23.1	22.8	23.6	24.1	23.4	24.2	23.9	24.7	25.2
	6H	22.9	23.5	23.4	24.0	24.6	24.2	24.8	24.7	25.3	25.9
	8H	23.1	23.7	23.7	24.2	24.8	24.5	25.1	25.1	25.6	26.2

Maximum UGR = 26.5

POLAR GRAPH

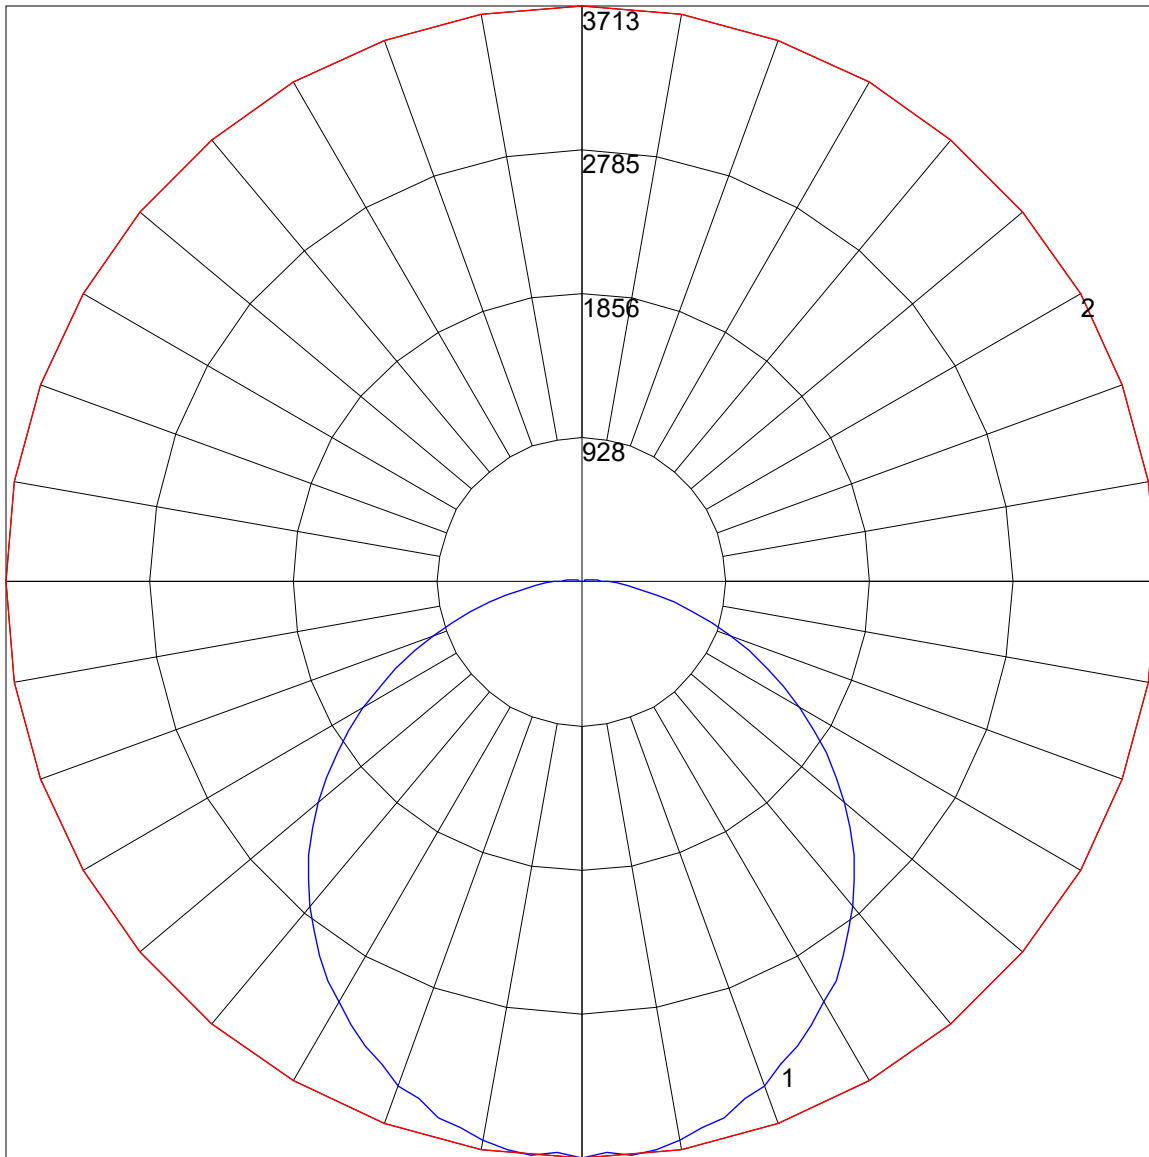

Maximum Candela = 3712.67 Located At Horizontal Angle = 0, Vertical Angle = 5
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (5) (Through Max. Cd.)