

INSTALLATION INSTRUCTION

IMPORTANT SAFEGUARDS

Read & Follow All Safety Instructions

When using electrical equipment, basic safety precautions should always be followed including:

1. Disconnect power before performing work on electrical equipment (using the light switch to turn off the power is not sufficient to prevent electrical shock)
2. Do not mount near gas or electric heaters
3. Do not install in unstable, loose or breakable surfaces and Do not let objects impact or exert force on the surface of the fixture
4. Use caution when servicing batteries (Battery acid can cause burns to skin and eyes; If acid is spilled on skin or eyes, flush with water and contact a physician immediately)
5. Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel
6. The use of accessory equipment not recommended by Beghelli Inc may cause an unsafe condition and will void the unit's warranty
7. Do not use this equipment for other than its intended purpose
8. Installation and servicing of this equipment should be performed by a qualified electrician familiar with the product and the hazards involved
9. Allow battery to charge for 24 hours before first use
10. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects

NOTE: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED



WARNING


1. Verify correct supply voltage by comparing it with the luminaire label information
2. All wiring connections should be capped with UL approved wire connectors
3. Use minimum 90°C Supply Wires




CAUTION

1. Avoid direct eye exposure to the light source while it is on
2. Beware- small parts and packing material may be hazardous to children
3. Risk of burn; Disconnect power and allow fixture to cool before handling fixture

SAVE THESE INSTRUCTIONS

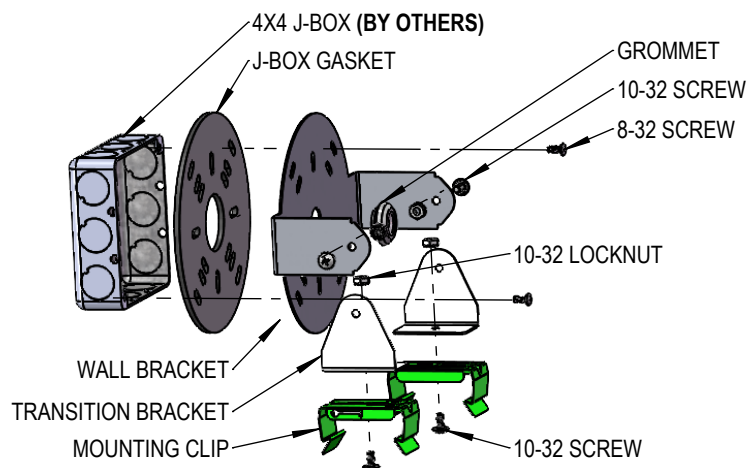


1. Attach the Transition Brackets to the Mounting Clips as shown
2. Attach the Mounting Clip assemblies to Wall Bracket
3. Snap the Fixture onto the Mounting Clip assemblies
4. Install Grommet on the Wall Bracket
5. Feed the power cord thru the Grommet and make electrical connections per wiring detail on page 2
6. Attach the entire assembly to the J-box (hardware by others)
7. Connect the battery (see page 2 instructions) before powering up the fixture

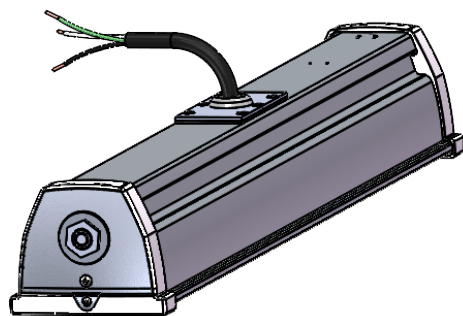


MOUNTING BRACKET CAN ACCOMODATE J-BOXES BELOW (RECESSED ONLY)

- 2X4 J-BOX
- 2X4 WEATHERPROOF J-BOX
- ROUND WEATHERPROOF J-BOX
- 4" OCTAGONAL J-BOX
- 4" ROUND J-BOX



WIRING DETAIL

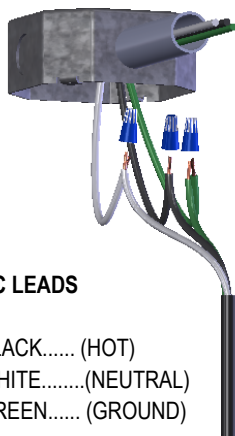

AC LEADS


BLACK..... (HOT)
WHITE.....(NEUTRAL)
GREEN..... (GROUND)

****BEFORE POWER UP THE FIXTURE,
CONNECT THE BATTERY AS SHOWN BELOW**

BATTERY CONNECTION INSTRUCTIONS

1. REMOVE END CAP

Remove screws and lightly pull out the bottom of the Cover to un-hook the top of the Cover

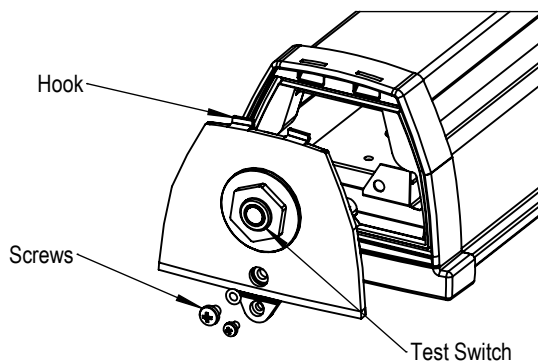

2. CONNECT THE BATTERY

