

INSTALLATION INSTRUCTION

IMPORTANT SAFEGUARDS

Read & Follow All Safety Instructions

When using electrical equipment, basic safety precautions should always be followed including:




1. Disconnect power before performing work on electrical equipment (using the light switch to turn off the power is not sufficient to prevent electrical shock)
2. Do not mount near gas or electric heaters
3. Do not install in unstable, loose or breakable surfaces and Do not let objects impact or exert force on the surface of the fixture
4. Use caution when servicing batteries (Battery acid can cause burns to skin and eyes; If acid is spilled on skin or eyes, flush with water and contact a physician immediately)
5. Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel
6. The use of accessory equipment not recommended by Beghelli Inc may cause an unsafe condition and will void the unit's warranty
7. Do not use this equipment for other than its intended purpose
8. Installation and servicing of this equipment should be performed by a qualified electrician familiar with the product and the hazards involved
9. Allow battery to charge for 24 hours before first use
10. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects

 **WARNING**



1. Verify correct supply voltage by comparing it with the luminaire label information
2. All wiring connections should be capped with UL approved wire connectors
3. Use minimum 90°C Supply Wires

 **CAUTION**



1. Avoid direct eye exposure to the light source while it is on
2. Beware- small parts and packing material may be hazardous to children
3. Risk of burn; Disconnect power and allow fixture to cool before handling fixture

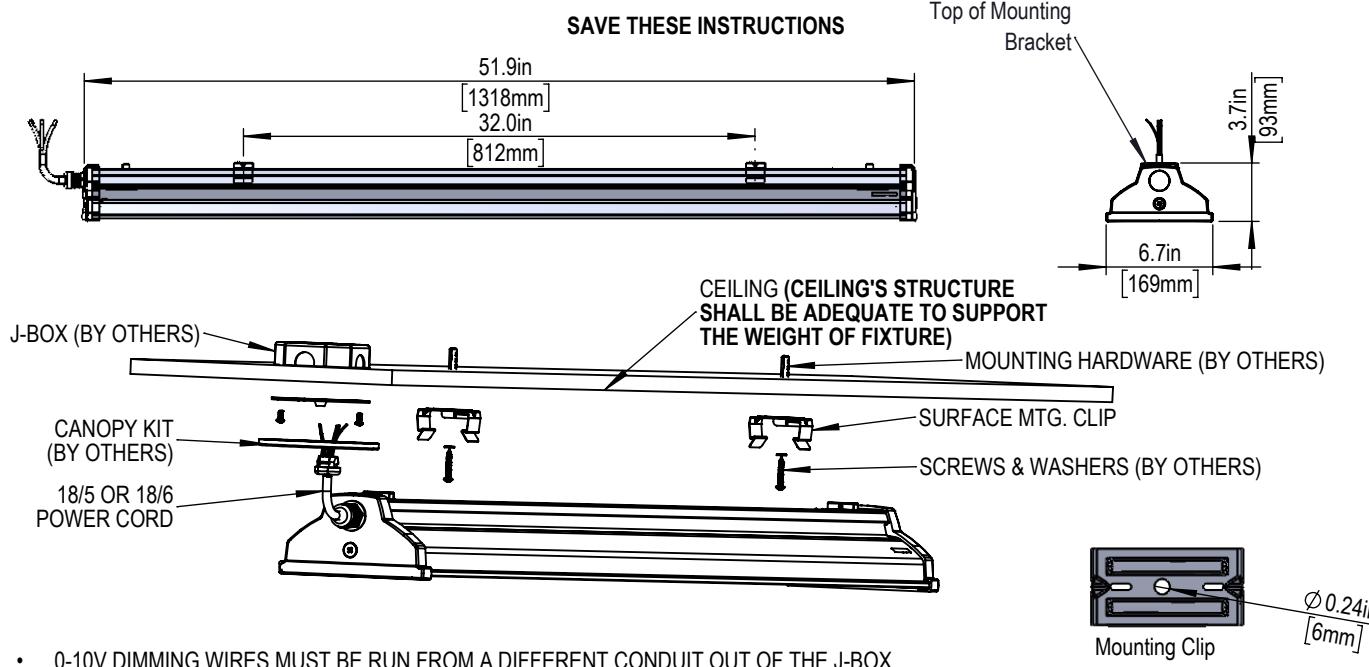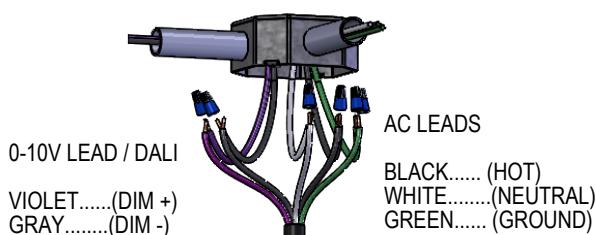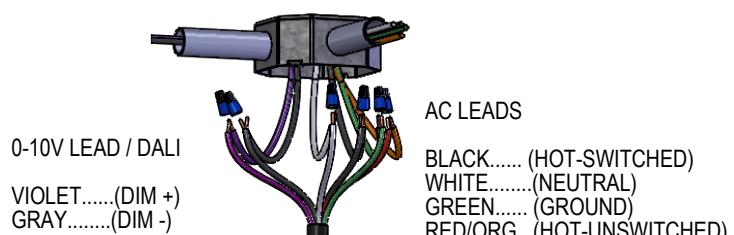**HT VERSION****SA VERSION**

SURFACE MOUNT - (STANDARD)

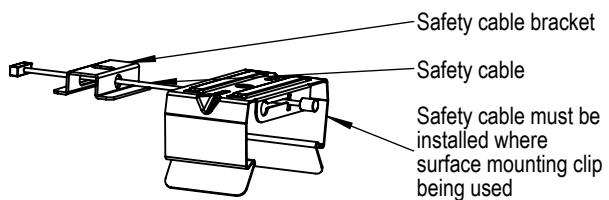
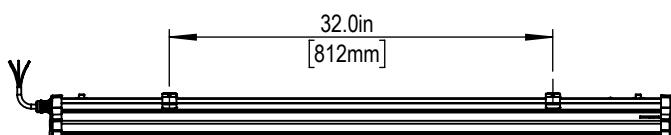


CHAIN HANG - (CH48)

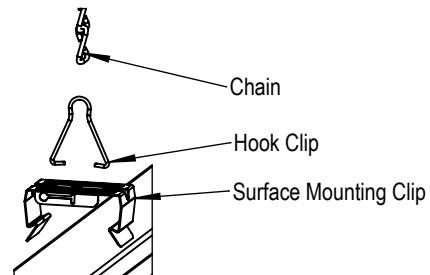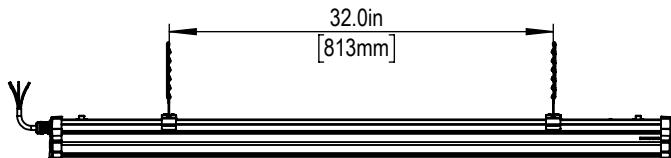



1. Insert the hook clip through the loop of the chain
2. Attach the hook clip onto the holes on the top of the surface mounting clip as shown
3. Snap the mounting clip assembly onto the housing as shown

AVIATION CABLE - (ACx: x = 50", 72")

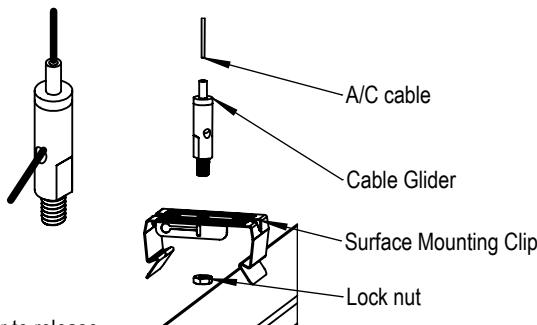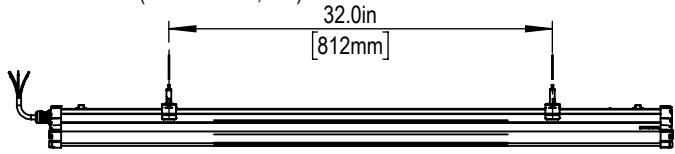



1. Attach the cable glider to the surface mounting clip using provided lock nut as shown.
2. Snap the mounting clip assembly onto the housing
3. Thread the A/C cable through the cable glider as shown. (push top sleeve of cable glider to release lock and adjust level)

PENDANT KIT - (2PKxW: x = 12", 24", 48")

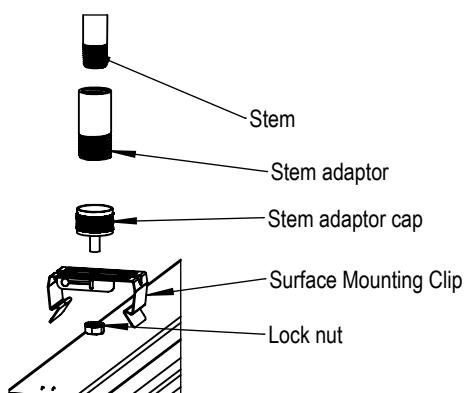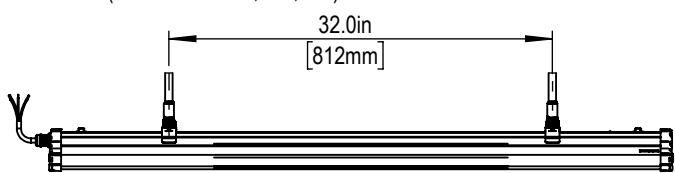


1. Attach the stem adaptor cap to the surface mounting clip using provided lock nut as shown.
2. Snap the mounting clip assembly onto the housing.
3. Attach stem adaptor & stem to the stem end-cap

PIVOT MOUNT KIT - (PM)

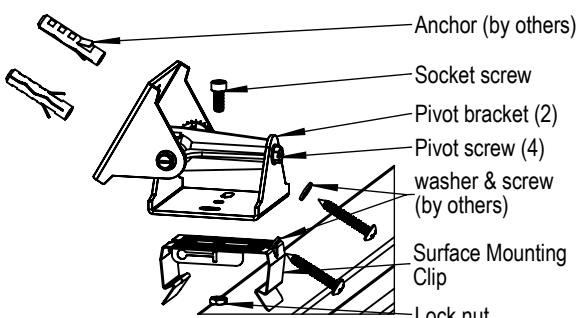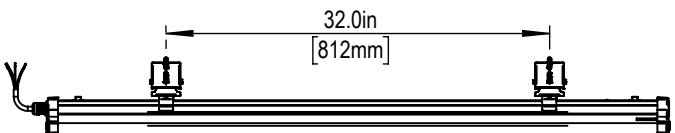


1. Attach the Pivot brackets together as shown.
2. Attach the Pivot assembly to mounting bracket as shown.
3. Mount the Pivot assembly to the desire location on wall/ceiling
4. Snap the fixture onto the mounting brackets.



TRUNNION MOUNT - (TM22BS04)

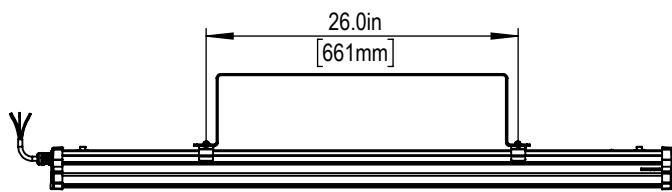

1. Attach the Trunnion Bracket to the mounting clips as shown.
2. Snap the fixture onto the Trunnion Bracket assembly as shown

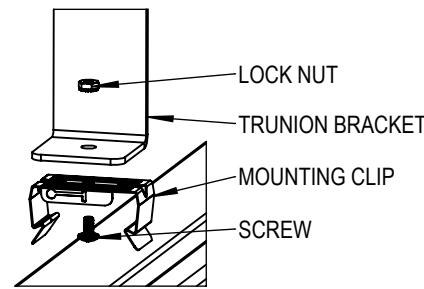

SEISMIC BRACKET - (SB)

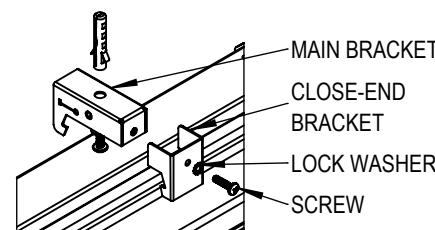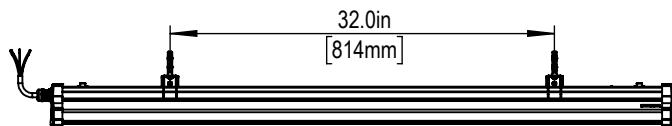


1. Attach the Seismic Brackets to the ceiling before attach the fixture to the brackets
2. Engage the hook of the bracket onto the railing of the housing, then attach the other end with screws and lock washer as shown.

ADDITIONAL DETAILS ON MOUNTING OPTIONS

AC - AIRCRAFT CABLE MOUNT KIT
(DAMP LOCATION)



PK - PENDANT KIT
(DAMP LOCATION)



FOR WET LOCATION J-BOX COVERS
(BY OTHERS)



(TYP. 4" ROUND)




3/8 NPT FEMALE X 1/2 NPT MALE
BUSHING REQUIRED



(TYP. 2"X4" RECTANGULAR)

CONNECTION BETWEEN FIXTURES FOR ROW MOUNT

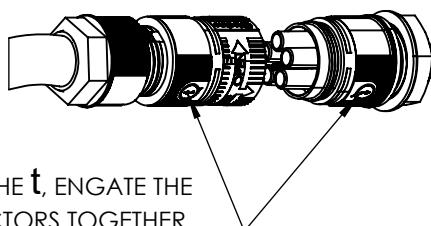


LINE UP THE **t**, ENGAGE THE
CONNECTORS TOGETHER,
THEN TIGHT THE NUT AS
INDICATED ON THE NUT


ROW MOUNT OPTION
(MAX. RUN DISTANCE PROJECT DEPENDANT)
(ONLY FOR CHAIN & AIRCRAFT CABLE)



CONTINUOUS ROW MOUNT OPTION
(MAX. RUN DISTANCE PROJECT DEPENDANT)
(ONLY FOR CHAIN & AIRCRAFT CABLE)



CONNECTED



1. WHITE (NEUTRAL)
2. GREEN (GROUND)
3. BLACK (HOT)
4. VIOLET (DIM +)
5. GRAY (DIM -)