



Beghelli

NSF[®]

SOLUTIONS



ILLUMINA VAPOR TIGHT - 2 FT, 4FT

3,900 to 11,500 lm / 30W to 70W

UV stabilized polycarbonate construction

3000K / 3500 K / 4000K / 5000K

IP66 quick mount bracket available

Integral battery backup and control options

TITLE
20 24



ILLUMINA VAPOR TIGHT - 4 FT

5,800 to 10,350 lm / 40W to 60W

UV stabilized polycarbonate construction

3000K / 3500K / 4000K / 5000K

Multiple mounting configurations

Integral battery backup and control options

TITLE
20 24



BS101LED

ILLUMINA VAPOR TIGHT - 4 FT

4,774 to 7,919 lm / 35W to 55W

UV stabilized polycarbonate construction

3000K / 3500K / 4000K / 5000K

Multiple mounting configurations

Integral battery backup and control options



BS101LED ECO

TITLE
20 24



ILLUMINA VAPOR TIGHT - 4 FT

4,090 to 4,155 lm / 35W

UV stabilized polycarbonate construction

4000K / 5000K

Multiple mounting configurations

Economical Solution



BS101LED ECO E



FSHB

FOOD SAFE HIGH BAY

23,000 to 30,000 lm / 150W to 200W

Streamlined white housing

5000K

0-10VDC dim-to-off driver

Emergency battery backup optional



FOOD SAFE VAPOR TIGHT - 4 FT

16,000 to 27,000 lm / 105W to 135W (selectable)

Plastic housing in pearl gray finish

3000K / 4000K / 5000K (selectable)

0-10VDC dim-to-off driver

EM battery backup + PIR occ sensor (optional)



VANDAL RESISTANT EXIT SIGN

Slimmer, low-profile cast aluminum housing

NSF certified for food-safe environments

NEMA 4X rated for moisture/ corrosion resistance

Vandal-resistant for high abuse applications

Low temperature option down to -40°C





TEMPESTA LED

WET LOCATION EMERGENCY

1990 lm in EM mode

Up to 70' on-center spacing

120 min UL924 emergency duration (NiMh)

Field-adjustable ceiling and wall mount

AC only, EM only and AC & EM models



WET LOCATION EMERGENCY


925 lm in EM mode

Up to 42' on-center spacing

90 min UL924 emergency duration (NiMh)

Field-adjustable ceiling or wall mount

AC only or AC & EM models

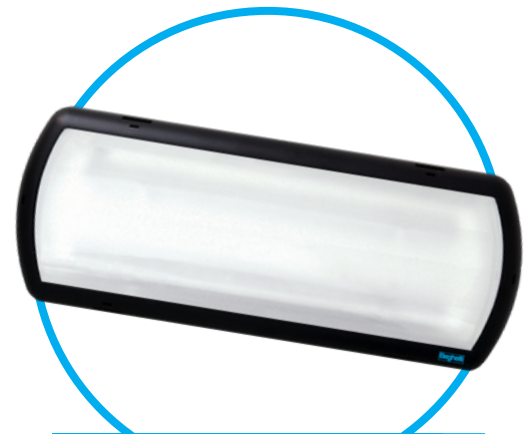

TEMPESTA LED ECO



TEMPESTA T20

TITLE 20 EMERGENCY UNIT

1491 lm in EM mode

Flame & corrosion resistant polycarbonate

Up to 80' on-center spacing

Operating temperatures: HT -20°C to +40°C

SA/SE 10°C to 40°C





CASTEX 510

HAZARDOUS VAPOR TIGHT - 2 FT, 4 FT

Class I, Division 2, Groups A, B, C and D

Durable, die-cast, copper-free aluminum housing

5000 to 12,000 lm / 40 to 80 W / 5000K standard

Operating Temperature -40°C to +60°C

Marine Grade UL 1598A



HAZARDOUS LOW TO HIGH BAY


Class 1, Division 2

Durable copper-free aluminum housing


Operating Temp -40°C to +55°C

8,000 to 56,000 lm / 5000K

Marine Grade UL 1598A

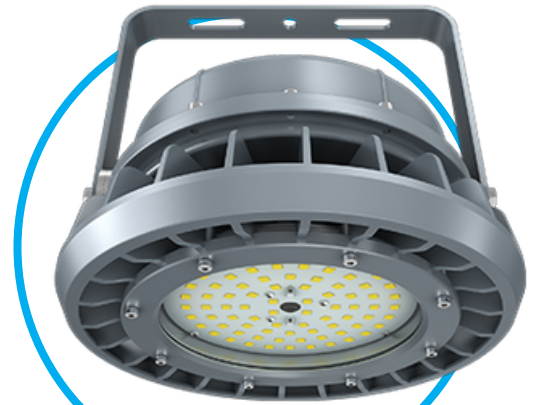

CASTEX 300

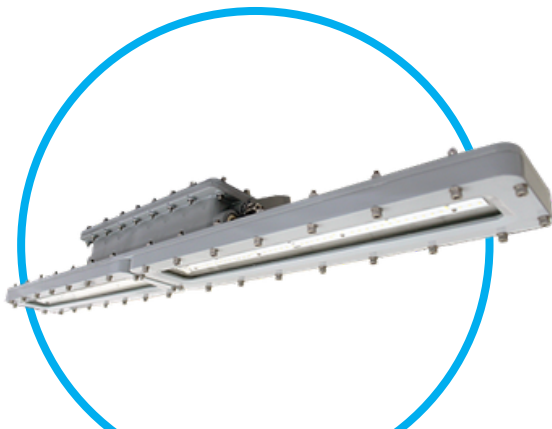

CASTEX 600

HAZARDOUS LINEAR

Class I, Division 1, Groups C, D

Durable copper-free aluminum housing

Operating Temp -40°C to +60°C

5,000 to 14,000 lm / 5000K

Marine Grade UL 1598A





Beghelli

BEGHELLI USA
3810 Executive Way
Miramar, FL 33025
954.442.6600



SOLUTIONS

www.beghelliusa.com