

CURVA RECESSED (CRVR)



EMERGENCY LIGHT

KEY FEATURES

- Recessed design for a clean, seamless look
- Up to 54' spacing at 10' height
- Durable, low profile aluminum trim plate in white and brushed aluminum finishes
- Autotest standard
- UL 924, CEC Title 20, Damp Location

CONSTRUCTION

- Low profile, extruded aluminum trim plate in white and brushed aluminum finishes
- Recessed ceiling or wall mount design
- Fixed, recessed LED lamp heads with polycarbonate optical lenses for uniform illumination

ELECTRICAL

- Input Voltage: 120-277V, 50/60 Hz
- Maintenance-free, long life, 6.4V, 2000mAh LiFePO4 battery
- Solid state charging circuit with low-voltage disconnect protection
- 24 hour charge time, 1.5 hr discharge durations
- Autotest standard

OPERATING TEMP:

- 5 to 50°C (41 to 122°F)

ILLUMINATION


- 949 lm
- 5000K CCT LED
- Minimum 90 min egress illumination

CERTIFICATIONS & WARRANTY

- UL 924 Listed
- Damp Location
- CEC Title 20
- 5 year Warranty, see website for full details



DIMENSIONS

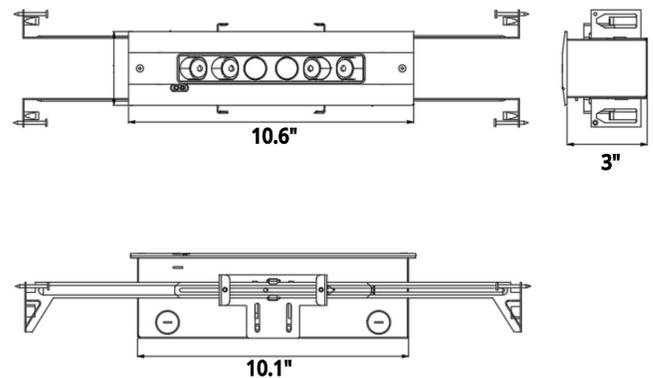


■ **WEIGHT:** 2.9 lb

ORDERING INFORMATION

MODEL	DESCRIPTION
CRVRSEW	Curva recessed emergency unit, LiFePO4 battery, autotest, 5-50°C, 120-277V, white
CRVRSEBA	Curva recessed emergency unit, LiFePO4 battery, autotest, 5-50°C, 120-277V, brushed aluminum

CURVA RECESSED

PHOTOMETRICS

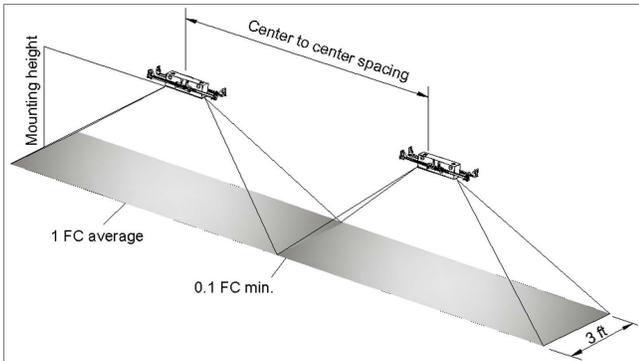

MODEL	MOUNTING HEIGHT	ON-CENTER SPACING		PATH OF EGRESS
		1 Fixture	Multiple Fixtures	
CRVRSE	10 ft	45 ft	54 ft	3 ft
CRVRSE	10 ft	45 ft	54 ft	6 ft

Disclosure:
Spacing is measured in lab conditions with an assumed open space, no obstructions and reflection rates of 80 (ceiling)/50 (walls)/20 (floor). Actual spacing may vary depending on the environment in which the fixture is installed.

