

Model: _____
 Job Name: _____
 Type: _____
 Date: _____

Most economical and versatile LED combo in a single SKU: red and green letters, single and double panels and universal mounting - Ideal for use on any job, big or small

A Beghelli "Every Project" Solution

internal

- Adjustable long lasting, efficient ultra bright white LED lamp heads
- 0.5W LED per lamp head (std) delivers 12' on-center spacing; HO option (2W/ head) increases spacing to 35' (7.5' MH)
- Unique all inclusive lamp, reflector and lens assembly
- Long-lasting red or green LED exit sign illumination
- Dual 120V/277V; (HV option for 120/230V, 50/60Hz - dedicated red or green letter models only)
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery)
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90 minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Remote capacity (RC) option of 1W for std output, 0.5W for HO, compatible with BRH and BRHWP remote heads

external

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white (std) or black (optional) finish

universal mounting

- Quick-mount canopy included for top or end mount
- Universal knock-out pattern on back plate for wall mount

ordering information

EXAMPLE: EPC

Model	Options
EPC	ATx (autotest, x = R for red letters, G for green letters only)
	B (black housing)
	HO ¹ (high output, 2W/ head)
	HVx (120/230V, x = R for red letters, G for green letters only)
	RC ¹ (remote capacity up to 1W)

WIREGUARD ACCESSORIES


WG10DX19LX7WWHT (surface ceiling mount, white)
 WG6DX16.5LX14WWHT (surface wall mount, white)

NOTE: EPC includes single & double panels, red & green letters, universal mounting in a single SKU (AT option is dedicated red or green letters only)

NOTE 1: RC and HO cannot be combined (0.5W remote capacity for HO)



dimensions

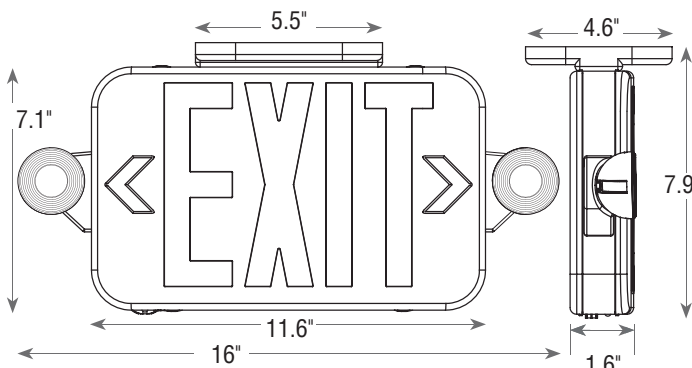

weight: 3.2lb


autotest option (SA operation only)

- Autotest performs monthly, bi-annual and annual testing per code
- Available only in dedicated Red or dedicated Green letter models
- Universal 120-277V

certifications & warranty

- 5 year warranty on unit, battery prorated for 5 years
- UL listed for Damp Locations (0°C - 40°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- Certified to CEC Title 20

photometrics

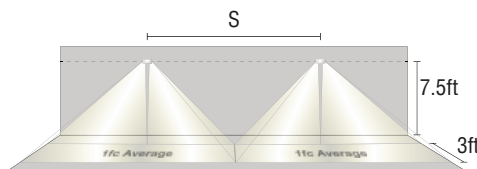

Model	Spacing (S)
EPC	12ft
EPCHO	35ft

electrical information

Input Watts (W)			Input Amps (A)		
120V	230V	277V	120V	230V	277V
1.2	N/A	1.2	0.12	N/A	0.12