

# EPX EVERY PROJECT EXIT SIGN



TITLE  
20



Model: \_\_\_\_\_  
 Job Name: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Date: \_\_\_\_\_

Most economical and versatile LED exit sign in a single SKU: red and green letters, single and double panels and universal mounting - Ideal for use on any job, big or small

## A Beghelli "Every Project" Solution



### internal

- Ultra bright, energy efficient, long life LED
- Dual 120/277V
- 1.2V Long life, maintenance-free, rechargeable Ni-Cd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing

### external

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in standard white finish, black finish is optional
- Architectural curved face with rounded corner design
- Field selectable chevrons

### universal mounting

- Quick-mount canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount

### autotest option (SA operation only)


- Autotest performs monthly, bi-annual and annual testing per code
- Available only in dedicated Red or dedicated Green letter models
- Universal 120-277V

### ordering information

EXAMPLE: EPXHT

Model	Operation	Options
EPX	HT (AC only)	2C <sup>1</sup> (2-circuit)
	SA (AC & EM)	ATG (autotest with green letters only)
		ATR (autotest with red letters only)
		B (black housing)
		USA <sup>2</sup> (assembled in USA)

### dimensions

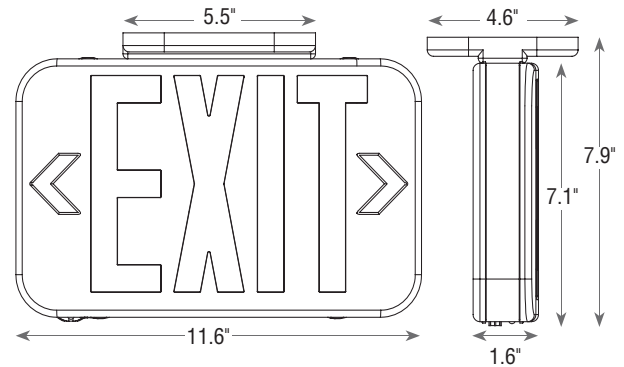

### weight: 1.3 lb

### certifications & warranty

- 5 year warranty on unit, battery prorated for 5 years
- UL Listed for Damp Locations (0°C – 40°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Code
- Certified to CEC Title 20

### electrical information

Input Watts (W)		Input Amps (A)	
120V	277V	120V	277V
1.2	1.2	0.12	0.12

### WIREGUARD ACCESSORIES

- WG10DX19LX7WWHT (surface ceiling mount, white)
- WG6DX16.5LX14WWHT (surface wall mount, white)
- WG14.5DX12.5LX6.5WWHT (surface end mount, white)

**NOTE:** EPX exit includes single and double panels, red and green letters, and universal mounting in a single SKU (AT option is dedicated red or green letters)

**NOTE 1:** Applies to HT only, specify 120V or 277V

**NOTE 2:** Substantial transformation assembly in the U.S. complies with "Assembled in USA" under the Buy American Act