



BX910LED4 LO/HO/VHO	
WATTAGE	30W/50W/60W
VOLTAGE	120-277V/347V 50/60Hz
WET LOCATION	YES
OPERATION	HT (AC ONLY)/0-10V DIMMING
AMBIENT TEMPERATURE (LO,HO)	-40°C (-40°F)/50°C (122°F)
AMBIENT TEMPERATURE (VHO)	-40°C (-40°F)/40°C (104°F)
WEIGHT	10 lbs
DIMENSION	47.5" L X 4.3" W X 4.0" H

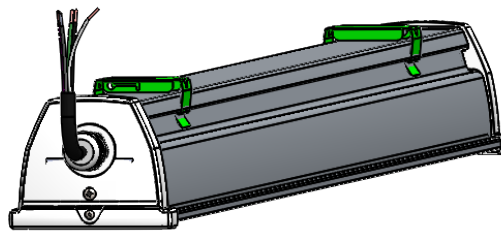


HT: pg 1-3

SA: pg 4-5


TO: pg 6-8

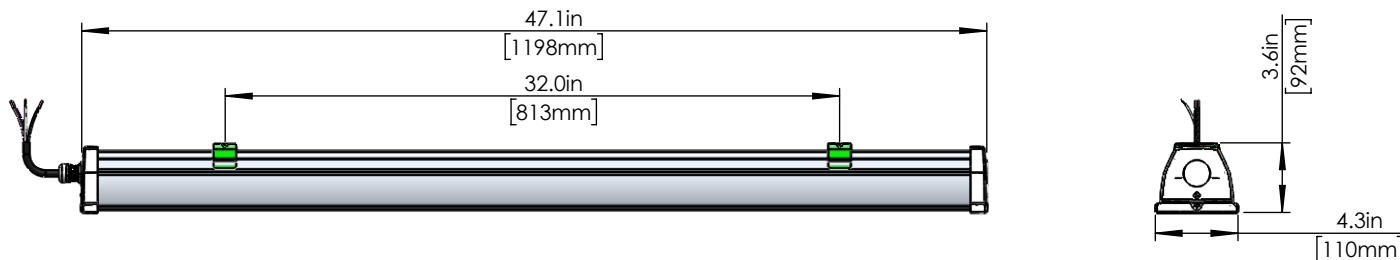

- CAUTION ! ALWAYS MAKE SURE THE POWER IS TURNED OFF** before starting the installation
- Measure, locate fixture's position, and mark locations for the brackets.
- Secure brackets to ceiling as shown below. (HARDWARE BY OTHERS)
- Wiring fixture to power supply, shall be performed by a **certified electrician**, and wired in a manner that complies with all **local and national electrical codes**, as well as the **manufacturer's wiring diagram**.

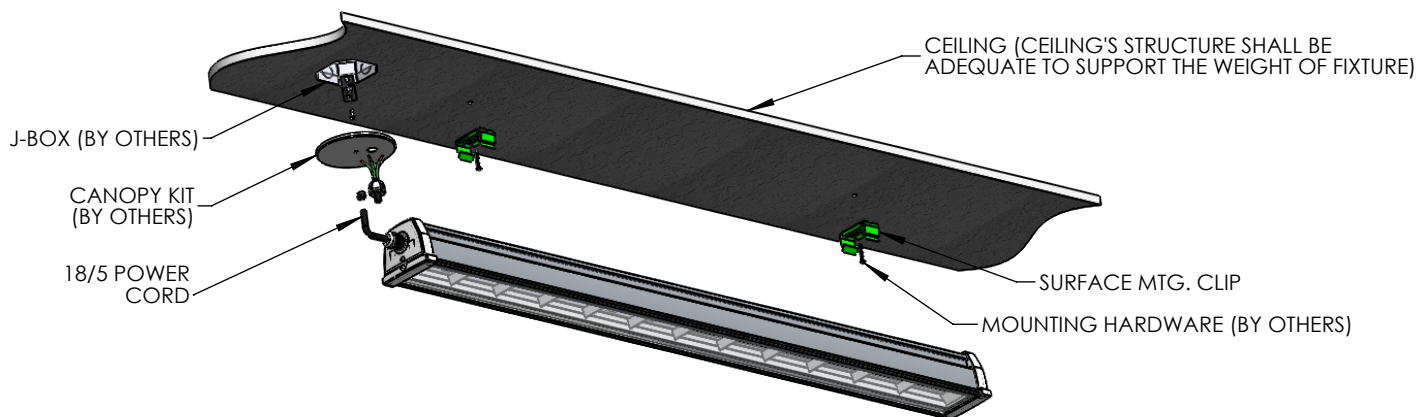

- 0-10V DIMMING WIRES MUST BE RUN FROM A DIFFERENT CONDUIT OUT OF THE J-BOX

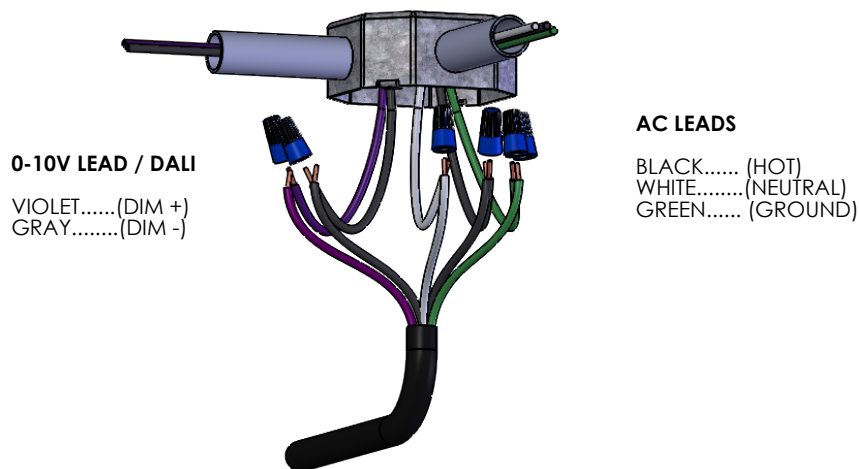


## BEGHELLI USA

3810 Executive Way  
Miramar, Florida 33025, USA  
Tel: (954) 442-6600  
Toll Free: 1 (800) 726-4316

## BEGHELLI MÉXICO


Av. del Marqués No. 70 Int.4. Parque  
Industrial Bernardo Quintana  
CP.76246 El Marqués, Qro, México  
Tel: 1 52 (442) 221.62.15/221.64.39

## SM - SURFACE MOUNT




1. Snap the fixture onto the pre-installed mounting clips


## AC - AVIATION CABLE KIT

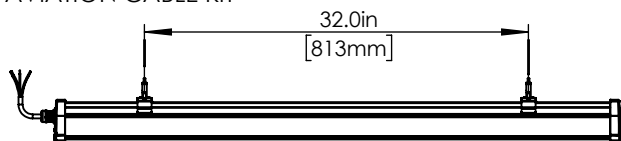


1. Attach the cable glider to the mounting clips using provided lock nuts as shown.
2. Snap the assembled mounting clips onto the railing on the housing.
3. Thread the A/C cable through the cable glider as shown. (push top sleeve of cable glider to release lock and adjust level)

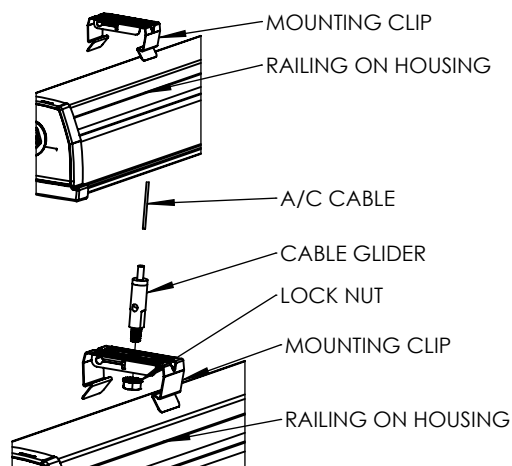


## CH - CHAIN HANG KIT

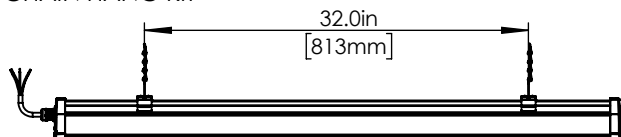


1. Insert the hook clip through the loop of the chain
2. Attach the hook clip onto the holes on the top of the mounting clips
3. Snap the fixture to the mounting clips to complete the installation

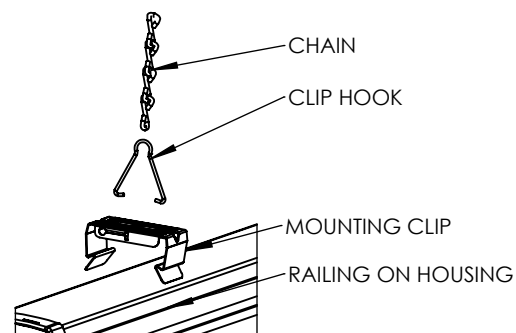

## AM - AIMABLE MOUNT

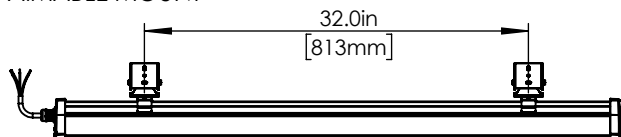

1. Assemble the swivel brackets as shown
2. Attach the swivel assemblies to the mounting clips
3. Snap the fixture to the mounting clips to complete the installation

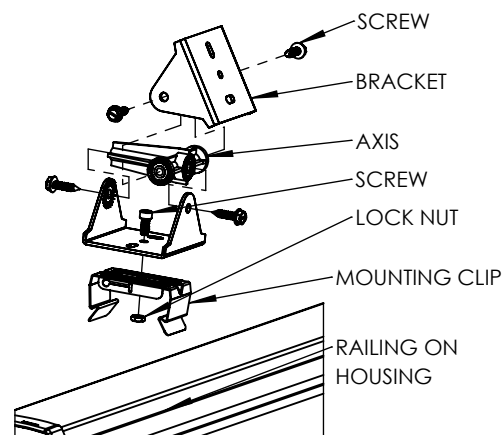


### BEGHELLI USA

3810 Executive Way  
Miramar, Florida 33025, USA  
Tel: (954) 442-6600


### BEGHELLI MÉXICO

Av. del Marqués No. 70 Int.4. Parque Industrial Bernardo Quintana  
CP.76246 El Marqués, Qro, México  
Tel: 1 52 (442) 221.62.15/221.64.39


## TM - TRUNION MOUNT

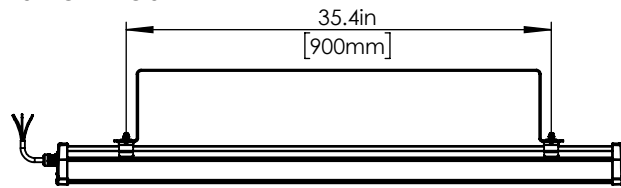


1. Attach the Trunion Bracket to the mounting clips as shown.
2. Snap the fixture onto the Trunion Bracket assembly as shown

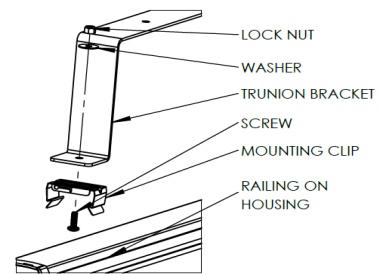



## SB - SEISMIC BRACKET MOUNT

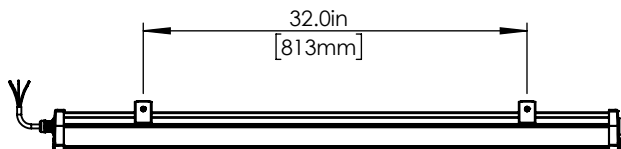

1. Attach the Seismic Brackets to the ceiling before attach the fixture to the brackets
2. Engage the hook of the bracket onto the railing of the housing, then attach the other end with screws and lock washer as shown.

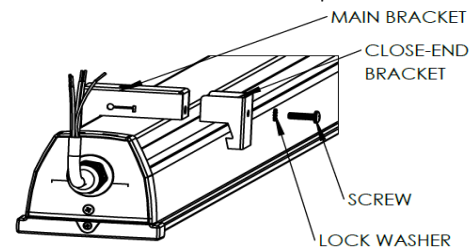

## WM - WALL MOUNT

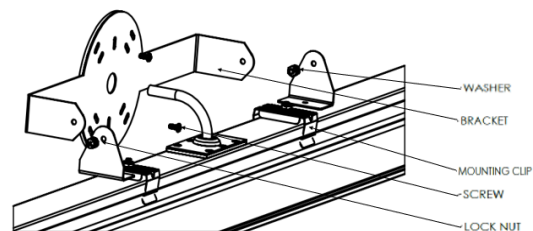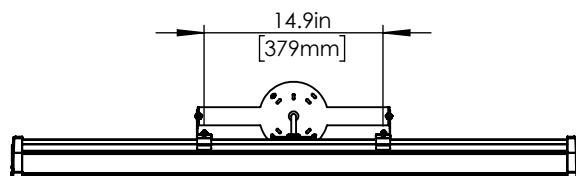


## ADDITIONAL DETAILS ON MOUNTING OPTIONS


### AC - AIRCRAFT CABLE MOUNT KIT (DAMP LOCATION)



### PK - PENDANT KIT (DAMP LOCATION)



### CONNECTION BETWEEN FIXTURES FOR ROW MOUNT



LINE UP THE  $\ell$ , ENGAGE THE CONNECTORS TOGETHER, THEN TIGHT THE NUT AS INDICATED ON THE NUT

### FOR WET LOCATION J-BOX COVERS (BY OTHERS)




(TYP. 4\"/>



(TYP. 2\"/>




3/8 NPT FEMALE X 1/2 NPT MALE BUSHING REQUIRED



ROW MOUNT OPTION  
(MAX. RUN DISTANCE FT)  
(ONLY FOR CHAIN & AIRCRAFT CABLE)  
VARIES



CONTINUOUS ROW MOUNT OPTION  
(MAX. RUN DISTANCE FT)  
(ONLY FOR CHAIN & AIRCRAFT CABLE)



1. WHITE (NEUTRAL)
2. GREEN (GROUND)
3. BLACK (HOT)
4. VIOLET (DIM +)
5. GRAY (DIM -)


## BEGHELLI USA

3810 Executive Way  
Miramar, Florida 33025, USA  
Tel: (954) 442-6600

## BEGHELLI MÉXICO

Av. del Marqués No. 70 Int.4. Parque Industrial Bernardo Quintana  
CP.76246 El Marqués, Qro, México  
Tel: 1 52 (442) 221.62.15/221.64.39



BX910LED4 LO/MO/HO/VHO	
WATTAGE	30W/45W/50W/60W
VOLTAGE	120-277V/347V 50/60Hz
WET LOCATION	YES
OPERATION	SA (AC/EM)/0-10V DIMMING
AMBIENT TEMPERATURE	-40°C (-40°F)/50°C (104°F)
AMBIENT TEMPERATURE (VHO)	-40°C (-40°F)/40°C (104°F)
WEIGHT	12 lbs
DIMENSION	47.5" L X 4.3" W X 4.0" H

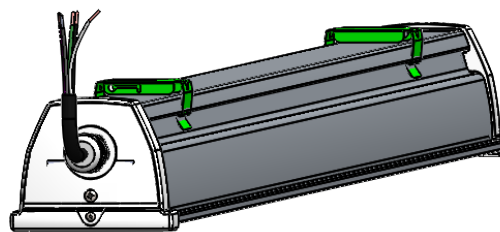


HT: pg 1-3

SA: pg 4-5


TO: pg 6-8

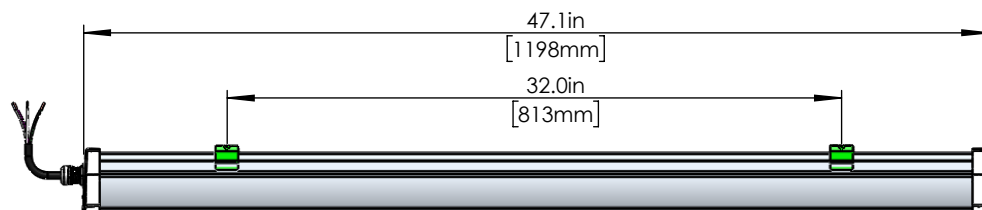

- CAUTION ! ALWAYS MAKE SURE THE POWER IS TURNED OFF** before starting the installation  
MISE EN GARDE! ASSUREZ-VOUS TOUJOURS QUE L'ALIMENTATION EST COUPÉE
- Measure, locate fixture's position, and mark locations for the brackets.
- Secure brackets to ceiling as shown below. (HARDWARE BY OTHERS)
- Wiring fixture to power supply, shall be performed by a **certified electrician**, and wired in a manner that complies with all **local and national electrical codes**, as well as the **manufacturer's wiring diagram**.
- Proper replacement of a part removed for user maintenance.

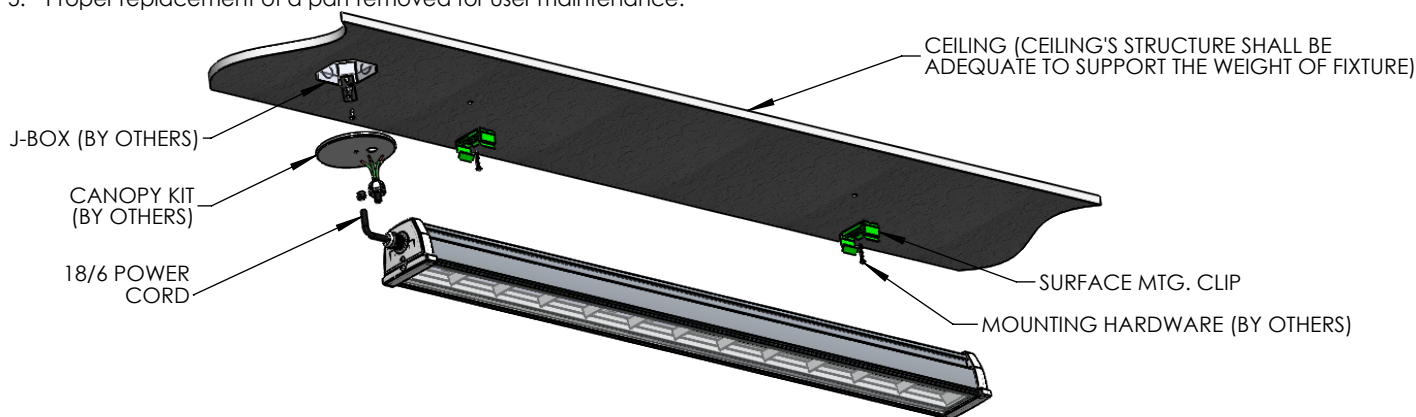

- 0-10V DIMMING WIRES MUST BE RUN FROM A DIFFERENT CONDUIT OUT OF THE J-BOX

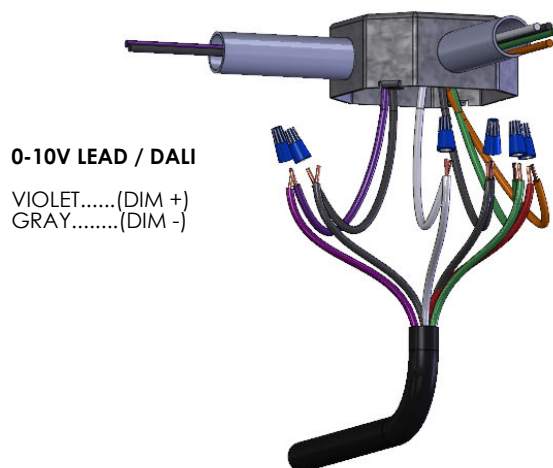

**0-10V LEAD / DALI**

VIOLET.....(DIM +)  
GRAY.....(DIM -)

**AC LEADS**

BLACK..... (SWITCHED/UNSWITCHED)  
WHITE..... (NEUTRAL)  
GREEN..... (GROUND)  
ORANGE/RED.... (UNSWITCHED)

### BEGHELLI USA

3810 Executive Way  
Miramar, Florida 33025, USA  
Tel: (954) 442-6600

### BEGHELLI MÉXICO


Av. del Marqués No. 70 Int.4. Parque  
Industrial Bernardo Quintana  
CP.76246 El Marqués, Qro, México  
Tel: 1 52 (442) 221.62.15/221.64.39

**DO NOT JOIN CONVERTER CONNECTOR UNTIL INSTALLATION IS COMPLETE & AC POWER IS SUPPLIED TO THE EMERGENCY DRIVER**

Remove the (2) screws to access the connection for the battery.



Connect the wires to engage the battery, before power up the fixture.

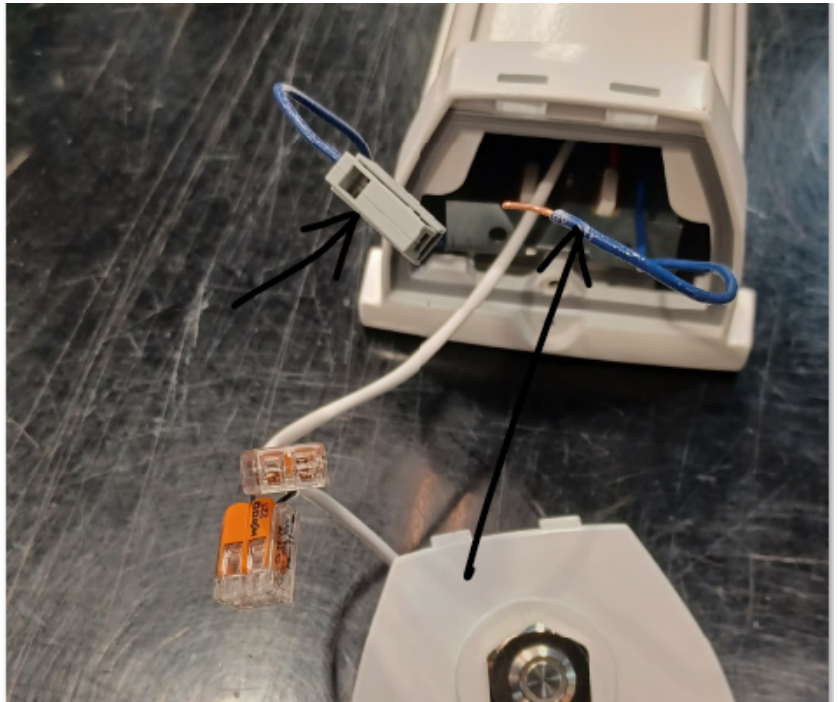

- **BATTERY NEEDS TO BE CHARGED MINIMUM 24 HRS, BEFORE PERFORMING THE ACTUAL 90 MIN. TEST**

**OPTIONAL MOUNTINGS:** CHAIN HANG KIT, AVIATION CABLE KIT, PENDANT KITS, PIVOT; (SEE SEPARATE **STANDARD INSTALLATION INSTRUCTION** SHEET FOR DETAILS)

## BEGHELLI USA


3810 Executive Way  
Miramar, Florida 33025, USA  
Tel: (954) 442-6600

## BEGHELLI MÉXICO

Av. del Marqués No. 70 Int.4. Parque  
Industrial Bernardo Quintana  
CP.76246 El Marqués, Qro, México  
Tel: 1 52 (442) 221.62.15/221.64.39





BX910LED4 LO/HO/VHO	
WATTAGE	30W/50W/60W
VOLTAGE	120-277V/347V 50/60Hz
WET LOCATION	YES
OPERATION	HT (AC ONLY)/0-10V DIMMING
AMBIENT TEMPERATURE	-40°C (-40°F)/50°C (122°F)
AMBIENT TEMPERATURE (VHO)	-40°C (-40°F)/40°C (104°F)
WEIGHT	10 lbs
DIMENSION	47.5" L X 4.3" W X 4.0" H

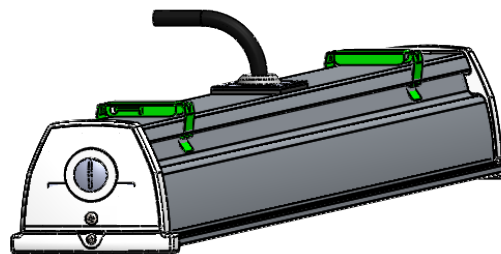


HT: pg 1-3

SA: pg 4-5


TO: pg 6-8

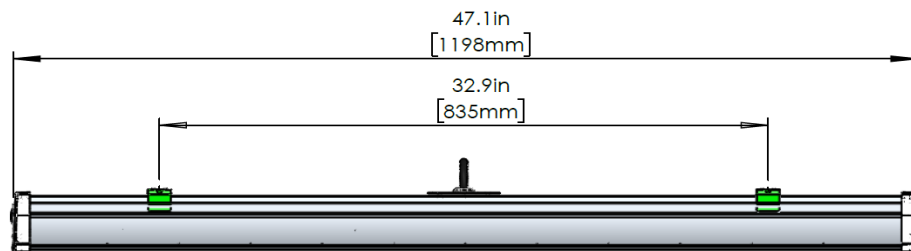

1. **CAUTION ! ALWAYS MAKE SURE THE POWER IS TURNED OFF** before starting the installation
2. Measure, locate fixture's position, and mark locations for the brackets.
3. Secure brackets to ceiling as shown below. (HARDWARE BY OTHERS)
4. Wiring fixture to power supply, shall be performed by a **certified electrician**, and wired in a manner that complies with all **local and national electrical codes**, as well as the **manufacturer's wiring diagram**.

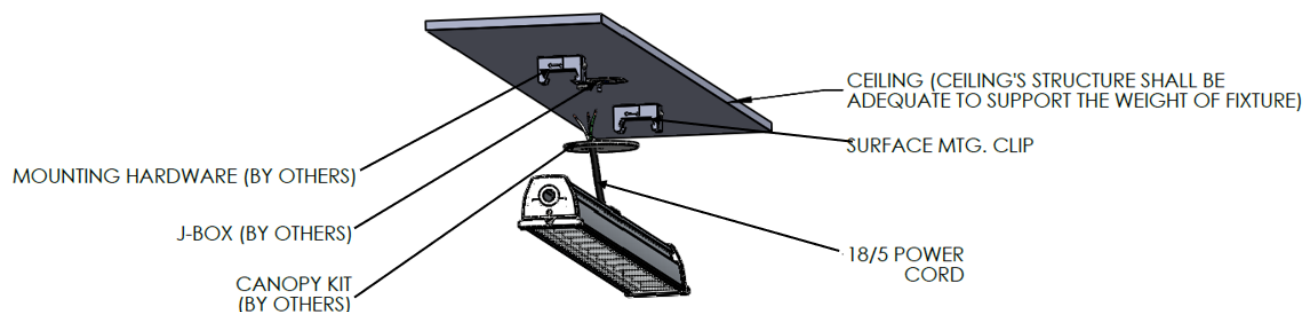

- 0-10V DIMMING WIRES MUST BE RUN FROM A DIFFERENT CONDUIT OUT OF THE J-BOX

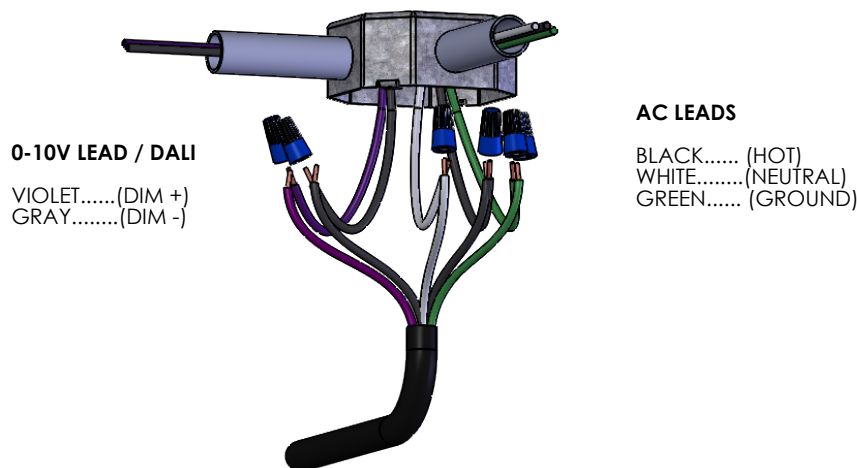



## BEGHELLI USA

3810 Executive Way  
Miramar, Florida 33025, USA  
Tel: (954) 442-6600

## BEGHELLI MÉXICO

Av. del Marqués No. 70 Int.4. Parque  
Industrial Bernardo Quintana  
CP.76246 El Marqués, Qro, México  
Tel: 1 52 (442) 221.62.15/221.64.39



## SM - SURFACE MOUNT

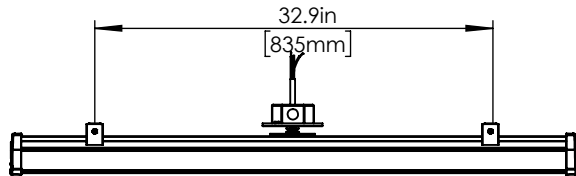

MOUNTING CLIP  
RAILING ON HOUSING



1. Snap the fixture onto the pre-installed mounting clips

## AC - AVIATION CABLE KIT

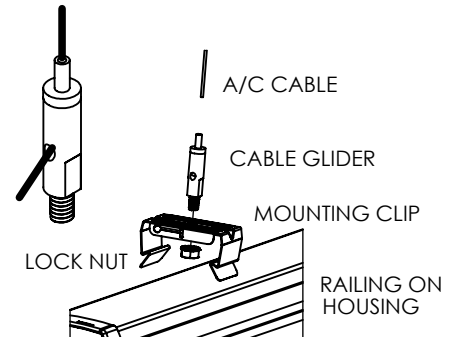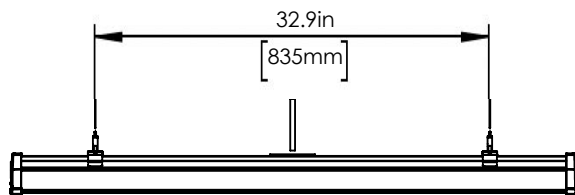



1. Attach the cable glider to the mounting clips using provided lock nuts as shown.
2. Snap the assembled mounting clips onto the railing on the housing.
3. Thread the A/C cable through the cable glider as shown. (push top sleeve of cable glider to release lock and adjust level)

## CH - CHAIN HANG KIT

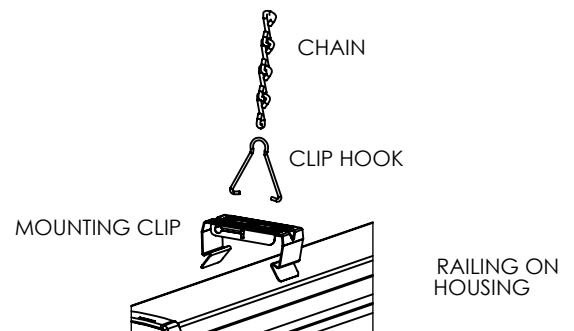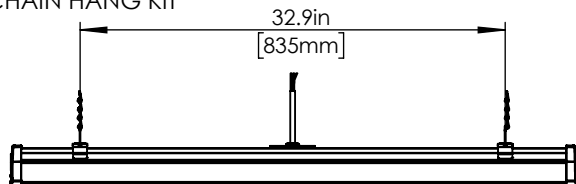

1. Insert the hook clip through the loop of the chain
2. Attach the hook clip onto the holes on the top of the mounting clips
3. Snap the fixture to the mounting clips to complete the installation

## AM - AIMABLE MOUNT

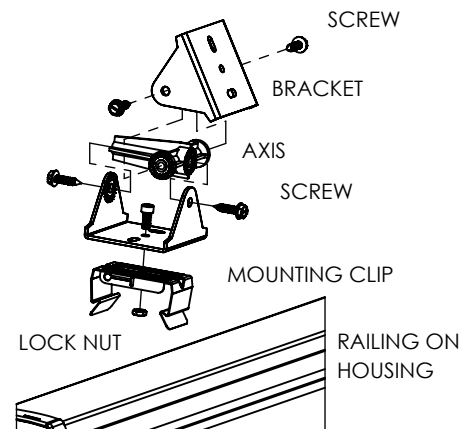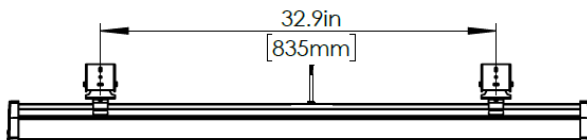

1. Assemble the swivel brackets as shown
2. Attach the swivel assemblies to the mounting clips
3. Snap the fixture to the mounting clips to complete the installation


### BEGHELLI USA

3810 Executive Way  
Miramar, Florida 33025, USA  
Tel: (954) 442-6600


### BEGHELLI MÉXICO

Av. del Marqués No. 70 Int.4. Parque  
Industrial Bernardo Quintana  
CP.76246 El Marqués, Qro, México  
Tel: 1 52 (442) 221.62.15/221.64.39


## TM - TRUNION MOUNT

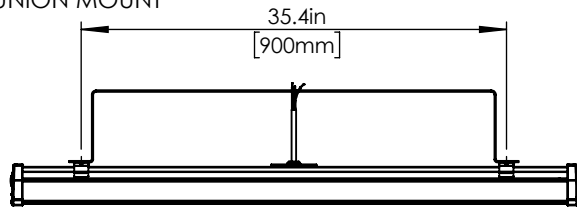


1. Attach the Trunion Bracket to the mounting clips as shown.
2. Snap the fixture onto the Trunion Bracket assembly as shown

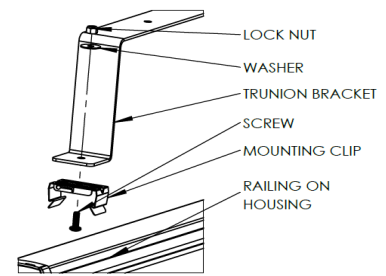



## SB - SEISMIC BRACKET MOUNT

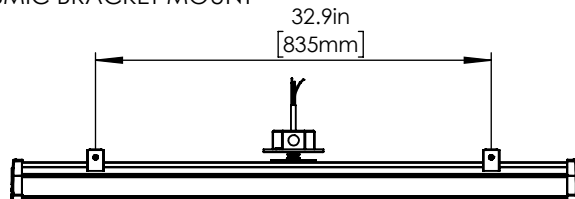

1. Attach the Seismic Brackets to the ceiling before attach the fixture to the brackets
2. Engage the hook of the bracket onto the railing of the housing, then attach the other end with screws and lock washer as shown.

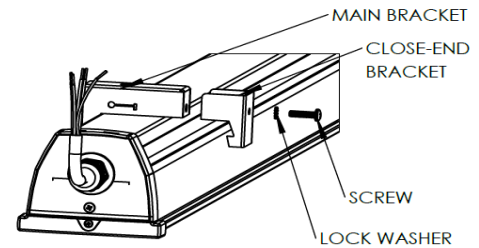

## WM - WALL MOUNT

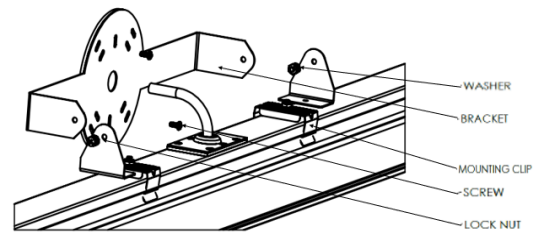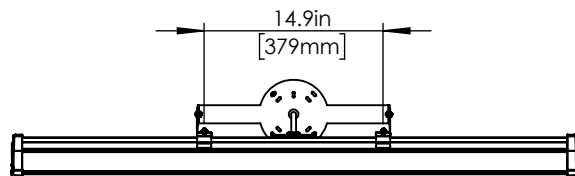


## ADDITIONAL DETAILS ON MOUNTING OPTIONS

### AC - AIRCRAFT CABLE MOUNT KIT (DAMP LOCATION)



CONNECTION BETWEEN FIXTURES FOR ROW MOUNT



LINE UP THE  $\ell$ , ENGAGE THE CONNECTORS TOGETHER, THEN TIGHT THE NUT AS INDICATED ON THE NUT

### FOR WET LOCATION J-BOX COVERS (BY OTHERS)




(TYP. 4" ROUND)



(TYP. 2"X4" RECTANGULAR)



3/8 NPT FEMALE X 1/2 NPT MALE  
BUSHING REQUIRED




1. WHITE (NEUTRAL)
2. GREEN (GROUND)
3. BLACK (HOT)
4. VIOLET (DIM +)
5. GRAY (DIM -)

### ROW MOUNT OPTION (MAX. RUN DISTANCE FT) (ONLY FOR CHAIN & AIRCRAFT CABLE) VARIES



### CONTINUOUS ROW MOUNT OPTION (MAX. RUN DISTANCE FT) (ONLY FOR CHAIN & AIRCRAFT CABLE)



## BEGHELLI USA

3810 Executive Way  
Miramar, Florida 33025, USA  
Tel: (954) 442-6600

## BEGHELLI MÉXICO

Av. del Marqués No. 70 Int.4. Parque Industrial Bernardo Quintana  
CP.76246 El Marqués, Qro, México  
Tel: 1 52 (442) 221.62.15/221.64.39